

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, SPEEDCON, No. of pos.: 6, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1243694

## Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

Item number	1619603
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAEB
Catalog page	Page 84 (C-2-2019)
GTIN	4046356822718
Weight per piece (including packing)	94.72 g
Weight per piece (excluding packing)	90.8 g
Customs tariff number	85366990
Country of origin	DE

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

## Technical data

### Notes

Order information:	Order crimp contacts 6 x Ø 2 mm separately
--------------------	--

### Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

### Data management status

Article revision	07
------------------	----

### Connector

#### Connection 1

Head design	Socket
-------------	--------

#### Insulating body

Note	Order information: Order crimp contacts Ø 2 mm separately
Coding	N
Insulation body material	PA 6.6
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	6
Direction of rotation	Standard
Connection profile	6
Contact diameter	2 mm
Signal contacts	
Litz wire cross-section Signal contacts min.	1 mm <sup>2</sup>
Litz wire cross-section Signal contacts max.	2.5 mm <sup>2</sup>
Nominal current per signal contact	20 A
Rated voltage Signal contact	48 V AC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3

#### Housing

Housing material	CuZn, GD-Zn
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

#### Seal

External cable diameter	3 mm ... 14.5 mm
Seal material	NBR

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
Ambient temperature (storage/transport)	15 °C ... 25 °C
Permissible humidity (storage/transport)	50 % ... 65 %

# CA-06S1N8A80DNS - Cable connector


1619603

<https://www.phoenixcontact.com/us/products/1619603>



## Drawings

Schematic diagram

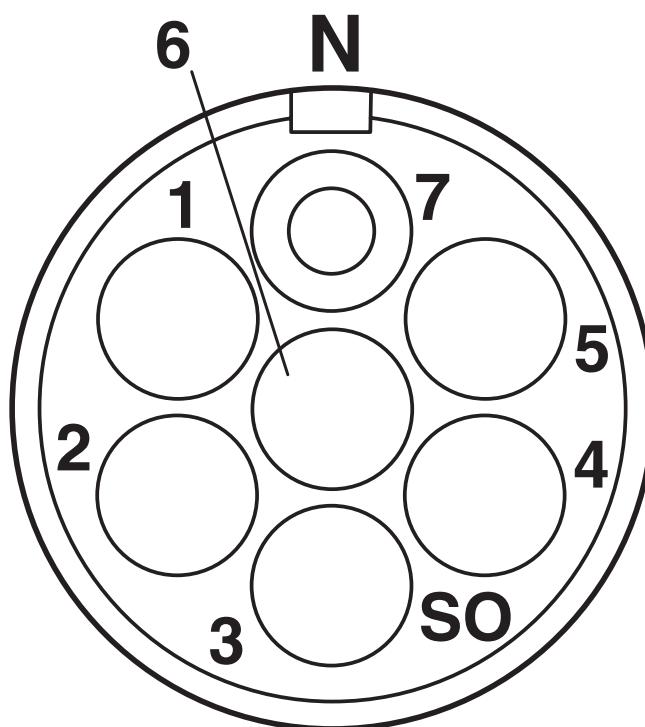

Connector pin assignment

# CA-06S1N8A80DNS - Cable connector





1619603

<https://www.phoenixcontact.com/us/products/1619603>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1619603>

 <b>cUL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	10 A	14 - 14	-

 <b>UL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	48 V	17 A	14 - 14	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	28734709-3b91-4fe8-8970-6d135f2e380a

# CA-06S1N8A80DNS - Cable connector

1619603

<https://www.phoenixcontact.com/us/products/1619603>



## Accessories

### SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



---

### SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>

Hook wrench, series: RC, UC, RF, SF





# CA-06S1N8A80DNS - Cable connector

1619603

<https://www.phoenixcontact.com/us/products/1619603>



## RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color coding, color: green



---

## RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color coding, color: orange



## CA-06S1N8A80DNS - Cable connector

1619603

<https://www.phoenixcontact.com/us/products/1619603>



### RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color coding, color: black



---

### RC-5CS2000 - Crimp contact

1603517

<https://www.phoenixcontact.com/us/products/1603517>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 1 mm<sup>2</sup> ... 1.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241635

## CA-06S1N8A80DNS - Cable connector

1619603

<https://www.phoenixcontact.com/us/products/1619603>



## RC-5AS2000 - Crimp contact

1603509

<https://www.phoenixcontact.com/us/products/1603509>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 1.5 mm<sup>2</sup> ... 2.5 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241635

---

## RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>



Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369

# CA-06S1N8A80DNS - Cable connector



1619603

<https://www.phoenixcontact.com/us/products/1619603>

## RC-59S2000 - Crimp contact

1603501

<https://www.phoenixcontact.com/us/products/1603501>



Crimp contact, Socket, turned, Single contact, contact diameter: 2 mm, crimp range: 0.75 mm<sup>2</sup> ... 1 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241633

---

## RC-5SS2000 - Crimp contact

1603530

<https://www.phoenixcontact.com/us/products/1603530>



Crimp contact, Socket, turned, contact diameter: 2 mm, crimp range: 0.5 mm<sup>2</sup> ... 0.75 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241633

## CA-06S1N8A80DNS - Cable connector

1619603

<https://www.phoenixcontact.com/us/products/1619603>



## CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

---

## PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/us/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)