

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



M23, Cable connector, series: CA, straight, shielded: yes, SPEEDCON, No. of pos.: 16+2+FE, Direction of rotation: Standard, contact connection type: Socket, Crimp connection, cable diameter range: 3 mm ... 14.5 mm, coding: N, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245000

## Your advantages

- Safe use in the field, thanks to high degree of protection
- Connector for flexible on-site assembly
- Consistent EMC protection for reliable transmission of signals
- Reduced connection time with SPEEDCON fast locking system
- Crimping connection: vibration- and temperature-resistant assembly

## Commercial data

Item number	1623838
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	AB31
Product key	ABRAEB
Catalog page	Page 85 (C-2-2019)
GTIN	4055626228556
Weight per piece (including packing)	95.2 g
Weight per piece (excluding packing)	90.85 g
Customs tariff number	85366990
Country of origin	DE

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Technical data

### Notes

Order information:	Order crimp contacts 16 x Ø 1 mm, 3 x Ø 1.5 mm separately
--------------------	---

### Product properties

Product type	Circular connector (cable-side)
--------------	---------------------------------

### Connector

#### Insulating body

Note	Order information: Order crimp contacts 16 x Ø 1 mm, 3 x Ø 1.5 mm separately
Coding	N
Insulation body material	PA 6.6
Insertion/withdrawal cycles	100
Connection method	Crimp connection
Contact switching type	Socket
Application	Signal
Number of positions	19
Direction of rotation	Standard
Connection profile	16+2+FE
Contact diameter <b>Power contacts</b>	1.5 mm
Litz wire cross-section <b>Power contacts</b> min.	0.08 mm <sup>2</sup>
Litz wire cross-section <b>Power contacts</b> max.	1 mm <sup>2</sup>
Rated current <b>Power contacts</b>	10 A
Note	for max. connection cross section
Rated voltage	48 V AC 74 V DC
Rated surge voltage	1.5 kV
Overvoltage category	II
Degree of pollution	3
Contact diameter <b>Signal contacts</b>	1 mm
Litz wire cross-section <b>Signal contacts</b> min.	0.08 mm <sup>2</sup>
Litz wire cross-section <b>Signal contacts</b> max.	1 mm <sup>2</sup>
Nominal current per signal contact	8 A
Note	for max. connection cross section
Rated voltage Signal contact	48 V AC
Rated surge voltage	1.5 kV
Overvoltage category	III
Degree of pollution	3
Installation height	2000 m

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Housing

Housing material	CuZn, GD-Zn
Type of locking	SPEEDCON
Pg screw connection	none
Degree of protection (plugged in)	IP67
Thread type	M23

## Seal

External cable diameter	3 mm ... 14.5 mm
Seal material	NBR


# CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>


## Drawings

Dimensional drawing

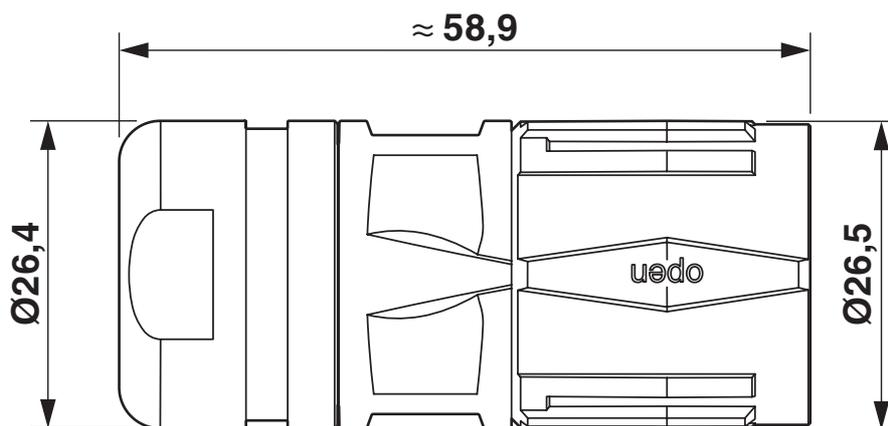

Technical drawings can be found under Downloads

Schematic diagram

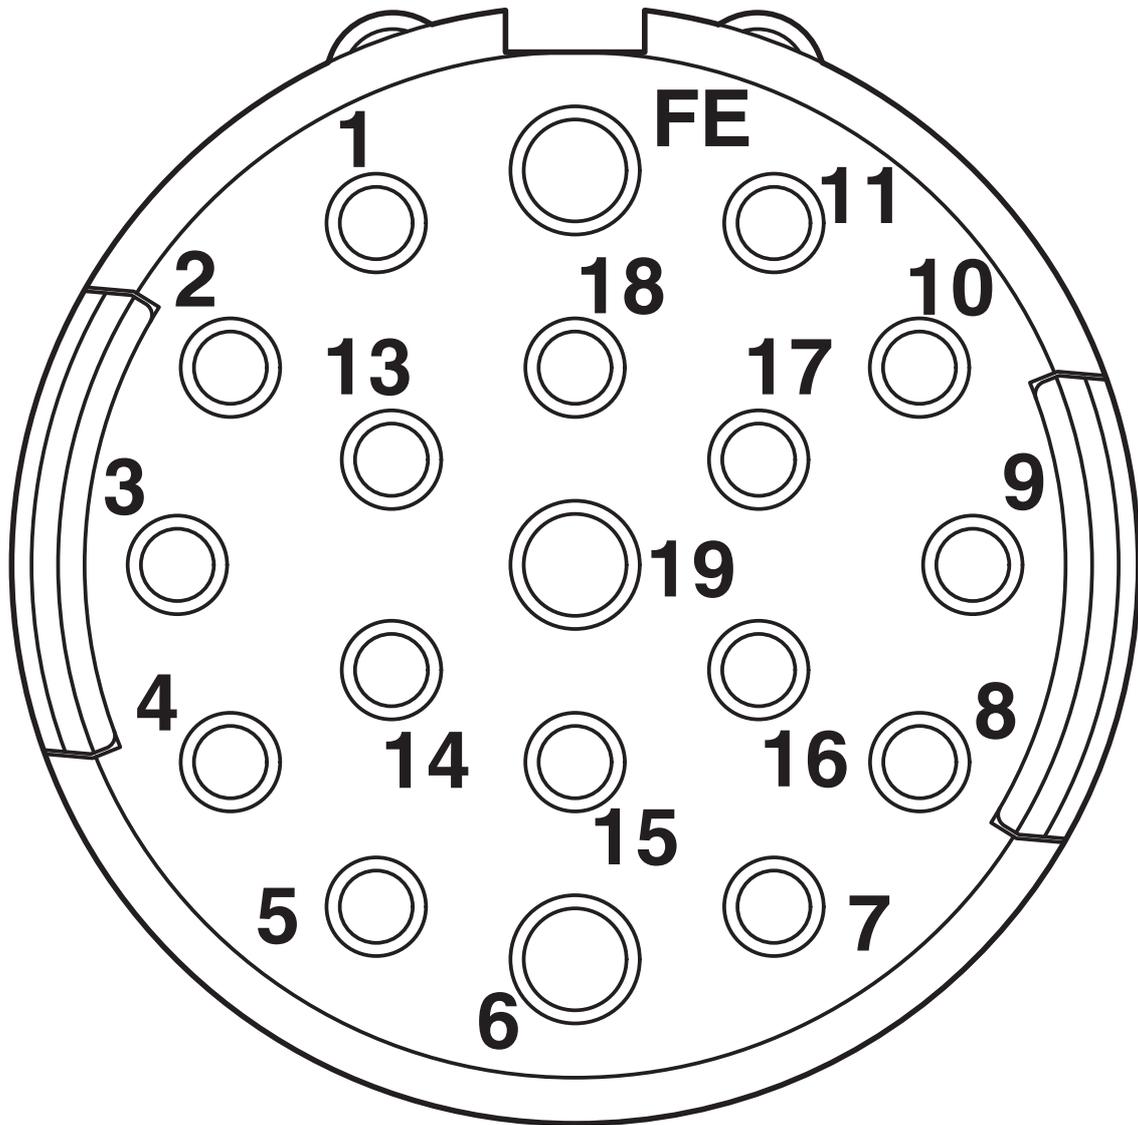

Connector pin assignment

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1623838>

 <b>cUL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Power	48 V	6 A	- 18	-
Signal	48 V	5 A	- 18	-

 <b>UL Recognized</b> Approval ID: E335019-20141210				
	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Power	48 V	10 A	- 18	-
Signal	48 V	8 A	- 18	-

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Classifications

### ECLASS

ECLASS-11.0	27440102
ECLASS-12.0	27440116
ECLASS-13.0	27440116

### ETIM

ETIM 9.0	EC002635
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------

1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Environmental product compliance

### EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

### China RoHS

Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.

### EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b9974921-faaa-4c46-bd86-7e3411aa1ff0

# CA-1RS1N8A80DNS - Cable connector



1623838

<https://www.phoenixcontact.com/us/products/1623838>

## Accessories

### RC-11S2000 - Crimp contact

1596772

<https://www.phoenixcontact.com/us/products/1596772>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

---

### RC-12S2000 - Crimp contact

1599600

<https://www.phoenixcontact.com/us/products/1599600>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.14 mm<sup>2</sup> ... 0.56 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241093

## CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>



### RC-1KS2000 - Crimp contact

1602998

<https://www.phoenixcontact.com/us/products/1602998>



Crimp contact, Socket, turned, Single contact, contact diameter: 1 mm, crimp range: 0.5 mm<sup>2</sup> ... 1 mm<sup>2</sup>, Contact release tool not necessary for the 12- and 17-pos. crimp versions of the M23-PRO series, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1241572

---

### RC-15S2000 - Crimp contact

1623775

<https://www.phoenixcontact.com/us/products/1623775>



Crimp contact, Socket, turned, contact diameter: 1.5 mm, crimp range: 0.5 mm<sup>2</sup> .. 1 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1244969

## CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>



## RC-15S2200 - Crimp contact

1627290

<https://www.phoenixcontact.com/us/products/1627290>



Crimp contact, Socket, turned, contact diameter: 1.5 mm, crimp range: 0.08 mm<sup>2</sup> ... 0.22 mm<sup>2</sup>, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245474

---

## SF-Z0027 - Hook wrench

1607455

<https://www.phoenixcontact.com/us/products/1607455>



Hook wrench, series: RC, UC, RF, SF

# CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>



## SF-Z0028 - Torque screwdriver

1607456

<https://www.phoenixcontact.com/us/products/1607456>

Torque screwdriver, series: RC, UC, SH, SF



---

## RF-Z0003 - Square mounting flange

1607905

<https://www.phoenixcontact.com/us/products/1607905>

Square mounting flange, Axial seal, 4xM3, flange dimensions: 35 mm x 35 mm, series: RF, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1242369



# CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>



## RF-Z0007 - Special wrench

1614347

<https://www.phoenixcontact.com/us/products/1614347>

Special wrench, series: RF



---

## RF-Z0014 - Color coding

1620588

<https://www.phoenixcontact.com/us/products/1620588>

Color coding, color: green



# CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>

## RF-Z0015 - Color coding

1620592

<https://www.phoenixcontact.com/us/products/1620592>

Color coding, color: orange



---

## RF-Z0016 - Color coding

1620593

<https://www.phoenixcontact.com/us/products/1620593>

Color coding, color: black



## CA-1RS1N8A80DNS - Cable connector

1623838

<https://www.phoenixcontact.com/us/products/1623838>



## CA-Z0077 - Metal protective cap

1627224

<https://www.phoenixcontact.com/us/products/1627224>



Metal protective cap, degree of protection: IP67, Alternative product in accordance with RoHS II without Exemption 6c (Pb < 0.1 %) item no.: 1245447

---

## PROT-M23-SG-IT-IP20 - Plastic protective cap

1577206

<https://www.phoenixcontact.com/us/products/1577206>



Plastic protective cap, M23, degree of protection: IP20, series: CA, RC, RF, UC, RM

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)