

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through



1640757

<https://www.phoenixcontact.com/us/products/1640757>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

QUICKON panel feed-through, for the front wall assembly with 50 cm long wires, 3-pos.



## Commercial data

Item number	1640757
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BF50
Product key	BF6HAA
Catalog page	Page 17 (PC-2002)
GTIN	4017918177416
Weight per piece (including packing)	33.59 g
Weight per piece (excluding packing)	33.59 g
Customs tariff number	85369010
Country of origin	PL

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through



1640757

<https://www.phoenixcontact.com/us/products/1640757>

## Technical data

### Product properties

Product type	Panel feed-through
Number of positions	3
Position marking	1, 2, 3
Number of connections	3
Number of connections per position	1
Shielded	no

### Insulation characteristics

Overvoltage category	III
Degree of pollution	3

### Connection data

#### Connection technology

Connection method On the device side	Single wires
Frequency of connections between conductors of the same cross section	10 (if the conductor is connected more than once, seal and cap may need to be replaced.)

#### Conductor connection

Conductor cross section flexibel	0.34 mm² ... 0.75 mm²
Conductor cross section solid	0.34 mm² ... 0.75 mm²
Connection cross section AWG	18 ... 16
Tightening torque Union nut	2.5 Nm
Tightening torque Contact carrier	3.75 Nm
Tightening torque Locking nut	3.75 Nm
Wrench size Union nut	19 mm
Wrench size Contact carrier	19 mm

#### Pin assignment

Contact   Color (signal designation)   Contact (optional)	1   BN
	2   WH
	3   BU

### Dimensions

Dimensional drawing	
---------------------	--

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through



1640757

<https://www.phoenixcontact.com/us/products/1640757>

Width	19 mm
Height	19 mm
Length	41.3 mm

## Electrical properties

Rated surge voltage (III/3)	4 kV
Contact resistance	< 3 mΩ
rated voltage (II/2)	320 V (with insulating sleeve)
rated voltage (III/2)	160 V (with insulating sleeve)
Rated voltage (III/3)	160 V (with insulating sleeve)
Nominal voltage $U_N$	160 V AC
	160 V DC
Nominal current $I_N$	9 A

## Material specifications

Color (Housing)	green (RAL 6021)
Material Housing	PA
Material Contact	Cu alloy
Flammability rating according to UL 94	V0
Material wire insulation	PVC / PE
Contact surface material	Pre-nickel plated and tin-plated

## Cable/line

Cable length	0.5 m
Structure of individual litz in acc. with VDE 0295 / smallest wire diameter	Class 2-6 // 0.34 mm <sup>2</sup> : 0.1 mm; 0.5 - 0.75 mm <sup>2</sup> : 0.15 mm
Wire diameter including insulation	2.5 mm
Position marking	1, 2, 3
Cable cross section	0.75 mm <sup>2</sup>

## Mounting

Mounting type	Front mounting M16
Assembly instructions	If the conductor is reconnected, it must be cut off above the last contact point. QUICKON components may only be operated when under no load.

## Environmental and real-life conditions

### Ambient conditions

Degree of protection	IP65
	IP67
Ambient temperature (operation)	-25 °C ... 80 °C (Specifications of the cable manufacturer must be observed.)
	-25 °C ... 50 °C (when the conductor is connected. Specifications of the cable manufacturer must also be observed.)
Temperature when conductor connected	-5 °C ... 50 °C

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through




1640757

<https://www.phoenixcontact.com/us/products/1640757>

## Drawings

### Dimensional drawing

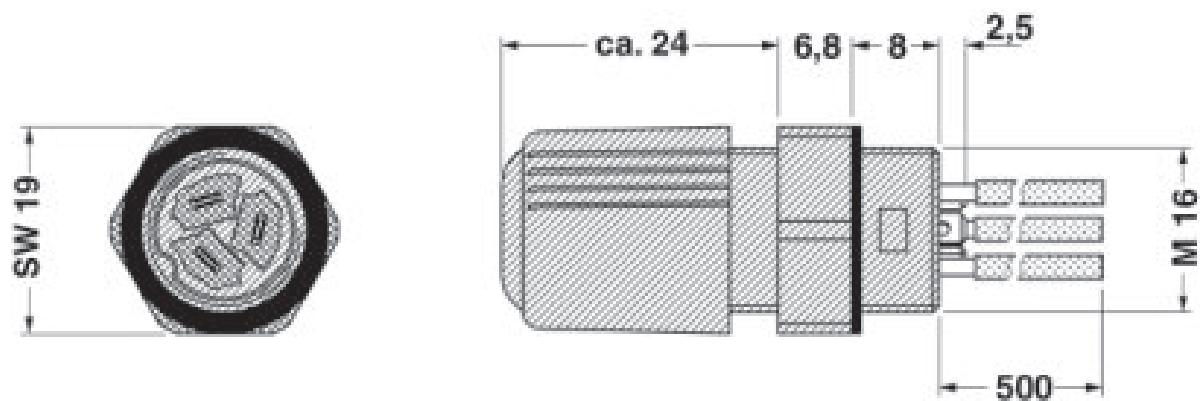

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through





1640757


<https://www.phoenixcontact.com/us/products/1640757>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1640757>

	<b>cUL Recognized</b> Approval ID: FILE E 118976			
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	250 V	6 A	-	-

	<b>UL Recognized</b> Approval ID: FILE E 118976			
	Nominal voltage U <sub>N</sub>	Nominal current I <sub>N</sub>	Cross section AWG	Cross section mm <sup>2</sup>
	250 V	9 A	-	-

	<b>EAC</b> Approval ID: RU C-DE.BL08.B.00511			

<b>cULus Recognized</b>				
-------------------------	--	--	--	--

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through



1640757

<https://www.phoenixcontact.com/us/products/1640757>

## Classifications

### ECLASS

ECLASS-11.0	27440602
ECLASS-13.0	27440602
ECLASS-12.0	27440602

### ETIM

ETIM 9.0	EC002566
----------	----------

### UNSPSC

UNSPSC 21.0	39121500
-------------	----------

# Q 0,75/3A50/9-M16KU-ESA - Panel feed-through



1640757

<https://www.phoenixcontact.com/us/products/1640757>

## Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)