


# Specifications

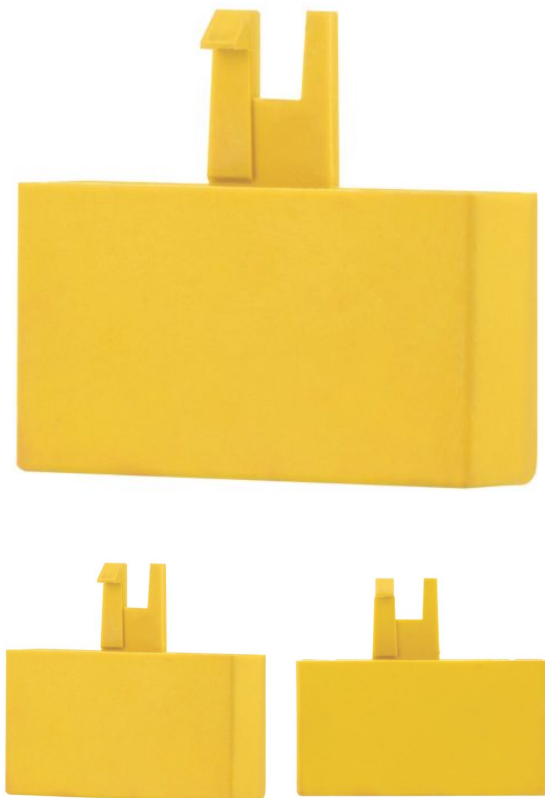

## Eaton 220228

Eaton Moeller® series PKZ4 Shroud for unused terminal, Protection against direct contact., For covering unused terminals on three-phase busbar link B3...-PKZ4

### General specifications

<b>PRODUCT NAME</b>	Eaton Moeller® series PKZ4 Accessory Shroud for unused terminal
<b>CATALOG NUMBER</b>	220228
<b>MODEL CODE</b>	H-B3-PKZ4
<b>EAN</b>	4015082202286
<b>PRODUCT LENGTH/DEPTH</b>	40 mm
<b>PRODUCT HEIGHT</b>	9 mm
<b>PRODUCT WIDTH</b>	35 mm
<b>PRODUCT WEIGHT</b>	0.005 kg
<b>CERTIFICATIONS</b>	CSA Class No.: 3211-06 CSA File No.: 165628 UL File No.: E36332 UL Category Control No.: NLRV UL IEC/EN 60947-4-1 CSA-C22.2 No. 14 CSA CE UL 508
<b>GLOBAL CATALOG</b>	220228

## Product specifications

<b>10.10 TEMPERATURE RISE</b>	Not applicable.
<b>10.11 SHORT-CIRCUIT RATING</b>	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
<b>10.12 ELECTROMAGNETIC COMPATIBILITY</b>	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
<b>10.13 MECHANICAL FUNCTION</b>	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.
<b>10.2.2 CORROSION RESISTANCE</b>	Meets the product standard's requirements.
<b>10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES</b>	Meets the product standard's requirements.
<b>10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT</b>	Meets the product standard's requirements.
<b>10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS</b>	Meets the product standard's requirements.
<b>10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION</b>	Meets the product standard's requirements.
<b>10.2.5 LIFTING</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.2.6 MECHANICAL IMPACT</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.2.7 INSCRIPTIONS</b>	Meets the product standard's requirements.
<b>10.3 DEGREE OF PROTECTION OF ASSEMBLIES</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.4 CLEARANCES AND CREEPAGE DISTANCES</b>	Meets the product standard's requirements.
<b>10.5 PROTECTION AGAINST ELECTRIC SHOCK</b>	Does not apply, since the entire switchgear needs to be evaluated.

## Resources

<b>BROCHURES</b>	<a href="#">eaton-motor-starters-system-xstart-brochure-br03407001en-en-us.pdf</a>
<b>CATALOGS</b>	<a href="#">eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf</a> <a href="#">Product Range Catalog Switching and protecting motors</a>
<b>DECLARATIONS OF CONFORMITY</b>	<a href="#">DA-DC-00004952.pdf</a> <a href="#">DA-DC-00004953.pdf</a> <a href="#">DA-DC-00005002.pdf</a> <a href="#">DA-DC-00004961.pdf</a> <a href="#">DA-DC-00004545.pdf</a> <a href="#">DA-DC-00004960.pdf</a>
<b>DRAWINGS</b>	<a href="#">121I085</a>
<b>ECAD MODEL</b>	<a href="#">DA-CE-ETN.H-B3-PKZ4</a>
<b>INSTALLATION INSTRUCTIONS</b>	<a href="#">IL03402003Z</a>
<b>INSTALLATION VIDEOS</b>	<a href="#">WIN-WIN with push-in technology</a>
<b>SALES NOTES</b>	<a href="#">eaton-link-module-for-motor-starters-pkz-flyer-fl034003en-en-us.pdf</a>

<b>10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS</b>	Is the panel builder's responsibility.
<b>10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS</b>	Is the panel builder's responsibility.
<b>10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH</b>	Is the panel builder's responsibility.
<b>10.9.3 IMPULSE WITHSTAND VOLTAGE</b>	Is the panel builder's responsibility.
<b>10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL</b>	Is the panel builder's responsibility.
<b>ACCESSORY/SPARE PART TYPE</b>	Cover
<b>AMBIENT OPERATING TEMPERATURE - MAX</b>	55 °C
<b>AMBIENT OPERATING TEMPERATURE - MIN</b>	-25 °C
<b>EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID</b>	0 W
<b>HEAT DISSIPATION CAPACITY PDISS</b>	0 W
<b>HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID</b>	0 W
<b>FUNCTIONS</b>	For covering unused terminals on three-phase commoning link B3...-PKZ4
<b>RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)</b>	0 A
<b>STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS</b>	0 W
<b>PROTECTION</b>	Protection against direct contact
<b>PRODUCT CATEGORY</b>	Accessories

PROJECT NAME:
PROJECT NUMBER:
PREPARED BY:
DATE:



**Eaton Corporation plc**  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

