

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708
<https://www.phoenixcontact.com/us/products/2313708>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



D-SUB connector, 9-pos., male connector, 90° cable entry, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

Product description

The D-SUB series, SUBCON-PLUS-PROFIB/... was specially designed for use in PROFIBUS systems up to 12 Mbps. Under field conditions, it allows convenient and fast connection of the incoming and outgoing bus cable. The terminating resistor is already integrated in all versions. It can be connected externally by means of a slide switch. At the same time, the outgoing bus segment is switched off. This makes it easy to start up segment by segment while incorrect terminations are avoided.

Your advantages

- Suitable for all common Fast Connect PROFIBUS cables and RS-485 bus lines

Commercial data

Item number	2313708
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN10
Product key	DNC531
Catalog page	Page 447 (C-6-2019)
GTIN	4046356514156
Weight per piece (including packing)	55.8 g
Weight per piece (excluding packing)	40 g
Customs tariff number	85366990
Country of origin	DE

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708

<https://www.phoenixcontact.com/us/products/2313708>

Technical data

Notes

Utilization restriction

CCCex note	Use in potentially explosive areas is not permitted in China.
------------	---

Product properties

Product type	Data plug
MTTF	6706 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	1817 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	155 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)
Pin assignment	3, 5, 6, 8

Electrical properties

Test voltage	50 V
Maximum power dissipation for nominal condition	0.025 W
Nominal voltage U_N	5 V
Nominal current I_N	100 mA

Connection data

Tightening torque	... 1.2 Nm
-------------------	------------

D-SUB connection

Connection method	D-SUB connector
-------------------	-----------------

PCB connection

Connection method	Screw connection
Stripping length	5 mm
Conductor cross section, rigid min.	0.14 mm ²
Conductor cross section, rigid max.	1.5 mm ²
Conductor cross section flexible min.	0.14 mm ²
Conductor cross section flexible max.	1 mm ²
Single-wire/terminal point, rigid AWG min.	26
Single-wire/terminal point, rigid AWG max.	16
Min. AWG conductor cross section, flexible	26
Max. AWG conductor cross section, flexible	18

Programming connection

Connection method	D-SUB socket
-------------------	--------------

Interfaces

Bus system	PROFIBUS DP
------------	-------------


SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708
<https://www.phoenixcontact.com/us/products/2313708>

Signal	PROFIBUS
--------	----------

Dimensions

Dimensional drawing	
Width	16.8 mm
Height	34.8 mm
Length	72 mm

Material specifications

Material (Housing)	ABS (metal-plated)
--------------------	--------------------

Cable/line

External cable diameter	7.6 mm ... 8.4 mm (Incoming bus line)
-------------------------	---------------------------------------

Mechanical properties

Mechanical data	
Insertion/withdrawal cycles	> 200

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP40
Ambient temperature (operation)	-20 °C ... 75 °C
Ambient temperature (storage/transport)	-25 °C ... 80 °C
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation)
Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Permissible humidity (storage/transport)	5 % ... 95 % (non-condensing)

Approvals

ATEX	
Identification	Ⓔ II 3 G Ex ec IIC T4 Gc
Certificate	PxCIF15ATEX2744348X
Note	Please follow the special installation instructions in the documentation!

UKEX	
Identification	Ⓔ II 3 G Ex ec IIC T4 Gc
Certificate	PxCIMA22UKEX2744348X

Corrosive gas test	
--------------------	--

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708
<https://www.phoenixcontact.com/us/products/2313708>

Identification	ISA-S71.04-1985 G3 Harsh Group A
Standards and regulations	
Free from substances that could impair the application of coating	in accordance with VW-AUDI-Seat central standard P-VW 3.10.7 57 65 0


SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector

2313708

<https://www.phoenixcontact.com/us/products/2313708>

Drawings

Schematic diagram

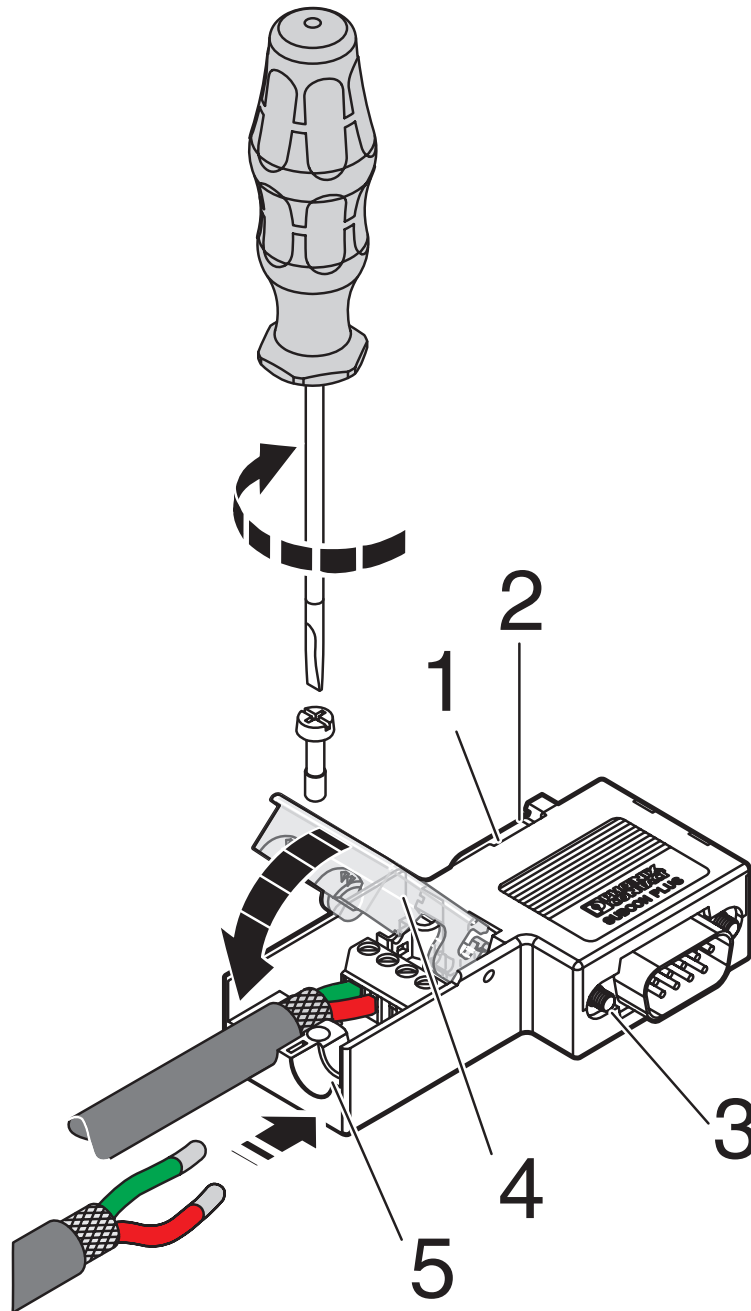


Connecting cables

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector




2313708
<https://www.phoenixcontact.com/us/products/2313708>

Dimensional drawing

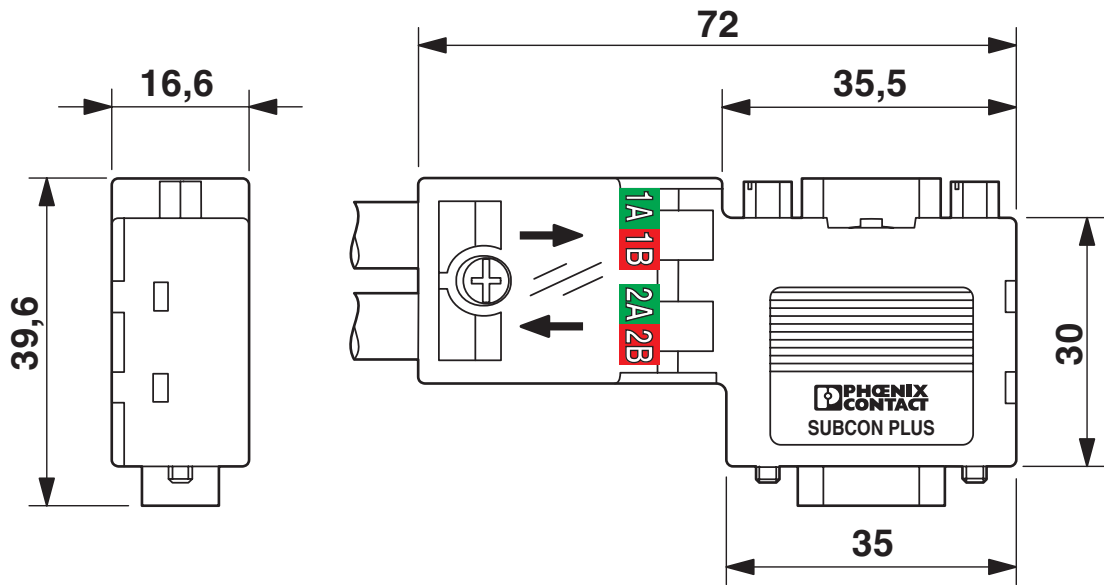

Dimensional drawing

Circuit diagram

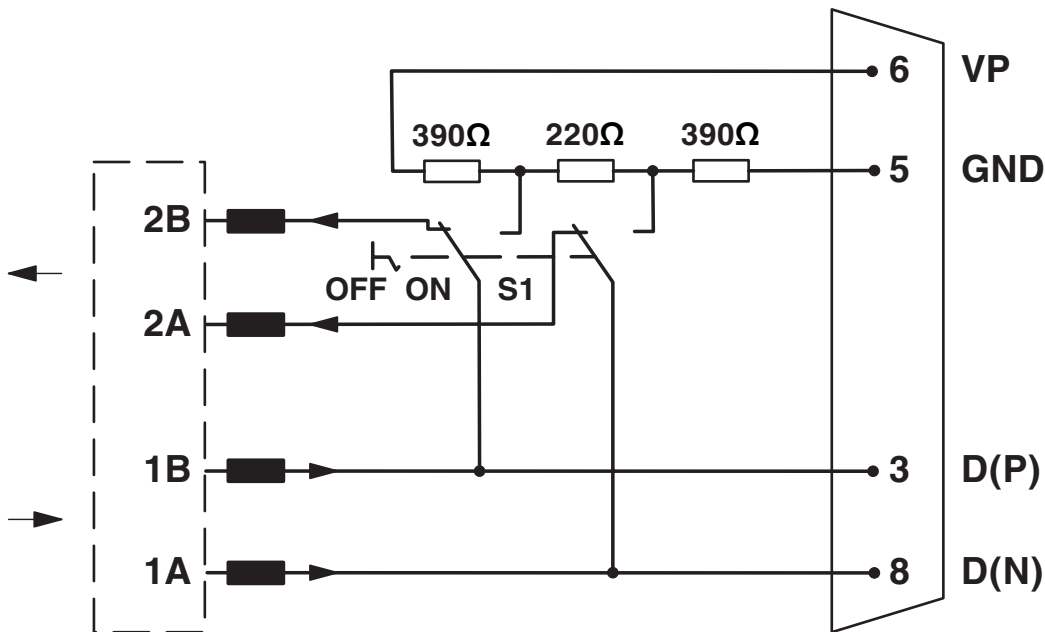


SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708

<https://www.phoenixcontact.com/us/products/2313708>

Schematic diagram

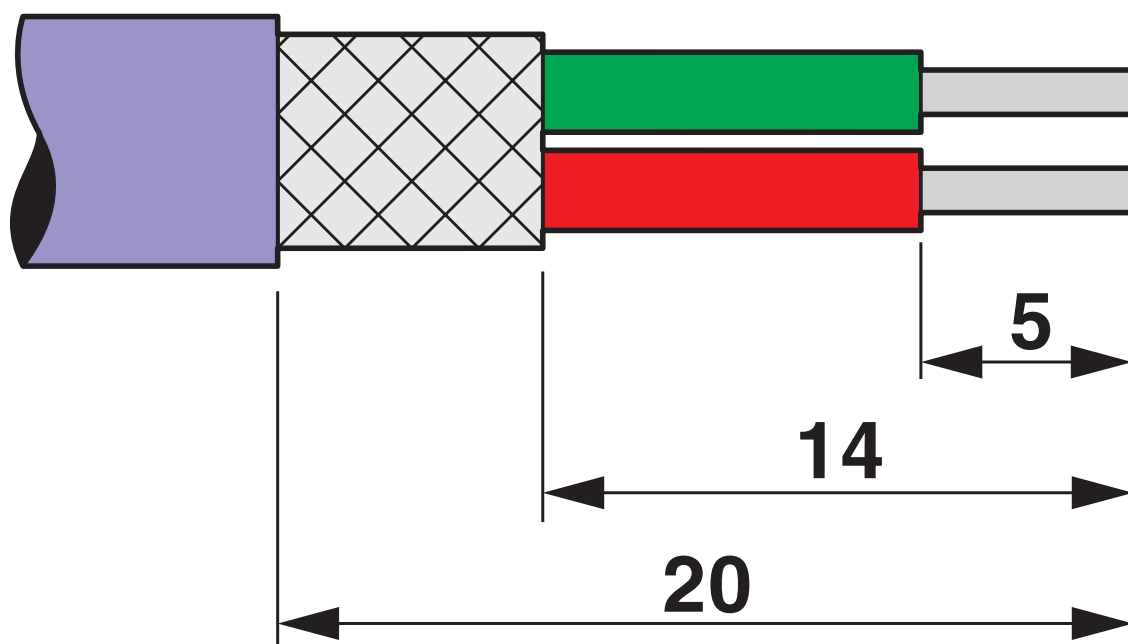

Stripping specifications


SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector




2313708
<https://www.phoenixcontact.com/us/products/2313708>

Approvals


To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2313708>



cUL Recognized
Approval ID: FILE E 238705



UL Recognized
Approval ID: FILE E 238705



CSA
Approval ID: 2437602

cULus Recognized

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector



2313708
<https://www.phoenixcontact.com/us/products/2313708>

Classifications

ECLASS

ECLASS-11.0	27440302
ECLASS-13.0	27440302
ECLASS-12.0	27440302

ETIM

ETIM 8.0	EC001132
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

2313708
<https://www.phoenixcontact.com/us/products/2313708>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	fbe050b2-bb0e-48df-b343-2c22c6beeef3

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com