

# PLD M 260 W-85/95 715/D40/SC - LED machine light



2702936

<https://www.phoenixcontact.com/it/products/2702936>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



LED machine light, 24 V DC, emission angle (vertical/Horizontal): 85 °/95 °, length: 715 mm, diameter: 40 mm, degree of protection: IP67, can be swiveled, resistant to coolants and lubricants, can be switched in series

## Product description

This LED machine light is designed to provide illumination inside or on machinery. You can use the light in harsh environments. This is possible thanks to the following properties: - High type of protection - Resistance to common cooling agents and lubricants - Resistance to vibrations and shock - 4 mm-thick safety glass The small diameter of just 40 mm enables mounting even where space is at a premium. Mounting is by means of holders or brackets (neither of which are supplied as standard) in which the light can swivel and the lighting can therefore be optimally aligned. To reduce the cabling effort for longer machines, the lights can be switched in series.

## Your advantages

- Space saving, thanks to the small diameter
- Plug-in supply line enables free choice of the cable length as well as quick and easy installation
- Focused illumination, thanks to swivel action
- IP67 protection and resistance to cooling agents and lubricants enables use in machine tools
- Can be used at high temperatures and can be subjected to strong vibrations and shocks
- Safety glass enables use even in environments with potential mechanical strain
- Minimal wiring effort, thanks to series connection
- ETL approval permits use on the North American market
- Particularly economical thanks to energy-efficient LED technology and an LED service life of at least 60,000 h

## Commercial data

Item number	2702936
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DRL
Product key	DRL222
Catalog page	Page 505 (C-6-2019)
GTIN	4055626443904
Weight per piece (including packing)	1,300 g
Weight per piece (excluding packing)	1,000 g
Customs tariff number	94054099
Country of origin	DE

# PLD M 260 W-85/95 715/D40/SC - LED machine light



2702936

<https://www.phoenixcontact.com/it/products/2702936>

## Technical data

### Notes

General	The PLD M-ME MC/D40 mounting holder (Item No. 2702491) or the PLD M-ME MB/D40 mounting bracket (Item No. 2702527) is required in order to mount the light.
---------	--

### Product properties

Product type	Machine light
Mounting position	any
Application	Machine tool
Special properties	can be swiveled with mounting accessories
	resistant to coolants and lubricants
	can be switched in series

### Electrical properties

#### Supply: Module electronics

Connection method	M12 connector (A-coded)
Number of positions	4
Permissible conductor cross section	min. 0.34 mm <sup>2</sup>
Supply voltage	24 V DC
Supply voltage range	20 V DC ... 28 V DC
Current consumption	typ. 0.9 A (at 24 V DC)
Power consumption	approx. 21.5 W (at 24 V DC)
Protective circuit	Surge protection; Varistor and suppressor diode, 36 V DC
	Reverse polarity protection; Polarity protection diode

### Connection data

Connection method	M12 connector (A-coded)
-------------------	-------------------------

### Signaling

#### Light properties

Source of light type	LED
Number of LEDs	57
Service life, lighting appliance	60000 h (L70)
Color temperature	5000 K
Color rendering index	80
Luminous flux	approx. 2280 lm (Net luminous flux)
Luminous efficacy	approx. 106 lm/W
Illumination	max. 957 lx (Distance of 1 m)
	min. 445 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Average illumination	718 lx (Distance of 1 m over 1 m <sup>2</sup> area)
Emission angle	85 ° (C0-C180)

# PLD M 260 W-85/95 715/D40/SC - LED machine light




2702936

<https://www.phoenixcontact.com/it/products/2702936>

	95 ° (C90-C270)
Ordinance	Delegated Regulation (EU) 2019/2015
Energy efficiency class	C (3 light sources)
	E (1 light source)
Note	This product contains energy efficiency class C light sources.
	This product contains an energy efficiency class E light source.

## Dimensions

Dimensional drawing	
Width	40 mm
Height	30 mm
Length	715 mm
Diameter	40 mm
Note on dimensions	Length without M12 flush-type connector

## Material specifications

Color	aluminum color
Material ()	Anodized aluminum (Light housing)
	Single-pane safety glass (ESG, thermally toughened float glass) (Pane)

## Environmental and real-life conditions

### Ambient conditions

Ambient temperature (operation)	0 °C ... 50 °C
Degree of protection	IP67
Air pressure (operation)	69 kPa ... 102 kPa
Air pressure (storage/transport)	69 kPa ... 102 kPa
Ambient temperature (storage/transport)	-20 °C ... 75 °C
Permissible humidity (operation)	95 % (non-condensing)
Permissible humidity (storage/transport)	95 % (non-condensing)

## Standards and regulations

Protection class	III (IEC 61140, EN 61140, VDE 0140-1)
------------------	---------------------------------------

## Mounting

Mounting type	Screw mounting
Assembly instructions	Mounting with mounting holders or mounting brackets, please observe the notes in the package slip.
Mounting position	any

# PLD M 260 W-85/95 715/D40/SC - LED machine light


2702936

<https://www.phoenixcontact.com/it/products/2702936>



## Drawings

Dimensional drawing

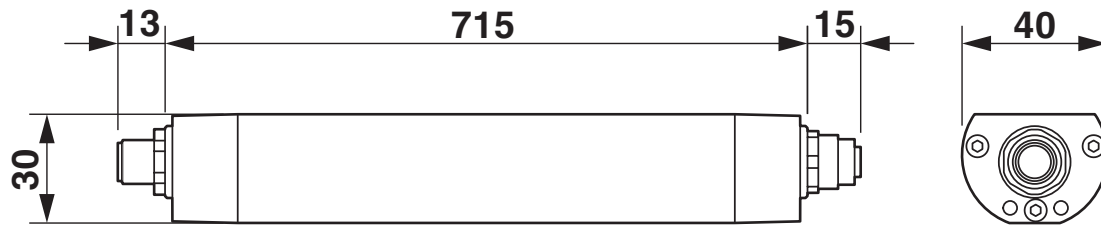

# PLD M 260 W-85/95 715/D40/SC - LED machine light



2702936

<https://www.phoenixcontact.com/it/products/2702936>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/it/products/2702936>



**ETLus**

Approval ID: LV-Lighting-Systems



**cETL**

Approval ID: Luminaires



**EAC**

Approval ID: TR\_TS\_D\_12879-22

**cETLus**

# PLD M 260 W-85/95 715/D40/SC - LED machine light



2702936

<https://www.phoenixcontact.com/it/products/2702936>

## Classifications

### ECLASS

ECLASS-11.0	27110345
ECLASS-12.0	27110345
ECLASS-13.0	27110345

### ETIM

ETIM 9.0	EC000348
----------	----------

### UNSPSC

UNSPSC 21.0	32151500
-------------	----------

# PLD M 260 W-85/95 715/D40/SC - LED machine light



2702936

<https://www.phoenixcontact.com/lt/products/2702936>

## Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact UAB  
Svitrigailos str. 11B  
03228 Vilnius  
+370 5 2106321  
[balticinfo@phoenixcontact.com](mailto:balticinfo@phoenixcontact.com)