



Contactor, 3 pole, 380 V 400 V 5.5 kW, 1 N/O, 220 V 50/60 Hz, AC operation, Screw terminals

EATON
Powering Business Worldwide™


Part no. **DILM12-10(220V50/60HZ)**
Catalog No. **276837**
Alternate Catalog No. **XTCE012B10AO**

Delivery program

Product range	Contactors		
Application	Contactors for Motors		
Subrange	Contactors up to 170 A, 3 pole		
Utilization category	AC-1: Non-inductive or slightly inductive loads, resistance furnaces AC-3/AC-3e: Normal AC induction motors: Starting, switching off while running AC-4: Normal AC induction motors: starting, plugging, reversing, inching		
	IE3 ✓		
Notes	Also suitable for motors with efficiency class IE3.		
Connection technique	Screw terminals		
Number of poles	3 pole		
Rated operational current			
AC-3			
Notes	At maximum permissible ambient temperature (open.) Also tested according to AC-3e.		
380 V 400 V	I_e	A	12
AC-1			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
Open			
at 40 °C	$I_{th} = I_e$	A	22
enclosed	I_{th}	A	18
Conventional free air thermal current, 1 pole			
open	I_{th}	A	50
enclosed	I_{th}	A	45
Max. rating for three-phase motors, 50 - 60 Hz			
AC-3			
220 V 230 V	P	kW	3.5
380 V 400 V	P	kW	5.5
660 V 690 V	P	kW	6.5
AC-4			
220 V 230 V	P	kW	2
380 V 400 V	P	kW	3
660 V 690 V	P	kW	4.4
Contacts			
N/O = Normally open	1 N/O		
Contact sequence			
Can be combined with auxiliary contact	DILA-XHI(V)...(-PI) DILA-XHI...S DILM32-XHI...(-PI)		
Actuating voltage	220 V 50/60 Hz		
Voltage AC/DC	AC operation		
Connection to SmartWire-DT	no		
Instructions	Contacts to EN 50 012.		
Frame size	1		

Technical data

General

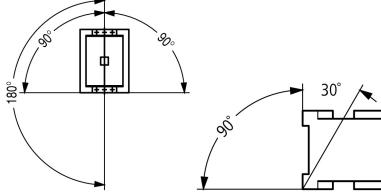Standards		IEC/EN 60947, VDE 0660, UL, CSA	
Lifespan, mechanical			
AC operated	Operations	$\times 10^6$	10
Operating frequency, mechanical			
AC operated	Operations/h		9000
Climatic proofing		Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30	
Ambient temperature			
Open	°C	-25 - +60	
Enclosed	°C	-25 - 40	
Storage	°C	-40 - 80	
Mounting position			
Mechanical shock resistance (IEC/EN 60068-2-27)			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact	g	10	
Auxiliary contacts			
N/O contact	g	7	
N/C contact	g	5	
Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted			
Half-sinusoidal shock, 10 ms			
Main contacts			
N/O contact	g	5.7	
Auxiliary contacts			
N/O contact	g	3.4	
N/C contact	g	3.4	
Degree of Protection		IP20	
Protection against direct contact when actuated from front (EN 50274)		Finger and back-of-hand proof	
Altitude	m	Max. 2000	
Weight	kg	0.24	
Screw connector terminals			
Terminal capacity main cable			
Solid	mm ²	1 x (0.75 - 4) 2 x (0.75 - 2.5)	
Flexible with ferrule	mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)	
Solid or stranded	AWG	single 18 - 10, double 18 - 14	
Stripping length	mm	10	
Terminal screw		M3.5	
Tightening torque	Nm	1.2	
Tool			
Pozidriv screwdriver	Size	2	
Standard screwdriver	mm	0.8 x 5.5 1 x 6	
Terminal capacity control circuit cables			
Solid	mm ²	1 x (0.75 - 4) 2 x (0.75 - 2.5)	
Flexible with ferrule	mm ²	1 x (0.75 - 2.5) 2 x (0.75 - 2.5)	
Solid or stranded	AWG	18 - 14	

Stripping length	mm	10
Terminal screw		M3.5
Tightening torque	Nm	1.2
Tool		
Pozidriv screwdriver	Size	2
Standard screwdriver	mm	0.8 x 5.5 1 x 6

Main conducting paths

Rated impulse withstand voltage	U_{imp}	V AC	8000
Oversupply voltage category/pollution degree			III/3
Rated insulation voltage	U_i	V AC	690
Rated operational voltage	U_e	V AC	690
Safe isolation to EN 61140			
between coil and contacts		V AC	400
between the contacts		V AC	400
Making capacity (p.f. to IEC/EN 60947)			
	Up to 690 V	A	144
Breaking capacity			
220 V 230 V		A	120
380 V 400 V		A	120
500 V		A	100
660 V 690 V		A	70
Short-circuit rating			
Short-circuit protection maximum fuse			
Type "2" coordination			
400 V	gG/gL 500 V	A	20
690 V	gG/gL 690 V	A	20
Type "1" coordination			
400 V	gG/gL 500 V	A	35
690 V	gG/gL 690 V	A	25

AC

AC-1			
Rated operational current			
Conventional free air thermal current, 3 pole, 50 - 60 Hz			
Open			
at 40 °C	$I_{th} = I_e$	A	22
at 50 °C	$I_{th} = I_e$	A	21
at 55 °C	$I_{th} = I_e$	A	21
at 60 °C	$I_{th} = I_e$	A	20
enclosed	I_{th}	A	18
Conventional free air thermal current, 1 pole			
open	I_{th}	A	50
enclosed	I_{th}	A	45
AC-3			
Rated operational current			
Open, 3-pole: 50 – 60 Hz			
Notes		At maximum permissible ambient temperature (open.) Also tested according to AC-3e.	
220 V 230 V	I_e	A	12
240 V	I_e	A	12
380 V 400 V	I_e	A	12
415 V	I_e	A	12
440V	I_e	A	12
500 V	I_e	A	10
660 V 690 V	I_e	A	7

Motor rating	P	kWh	
220 V 230 V	P	kW	3.5
240V	P	kW	4
380 V 400 V	P	kW	5.5
415 V	P	kW	7
440 V	P	kW	7.5
500 V	P	kW	7
660 V 690 V	P	kW	6.5
AC-4			
Open, 3-pole: 50 – 60 Hz			
220 V 230 V	I _e	A	7
240 V	I _e	A	7
380 V 400 V	I _e	A	7
415 V	I _e	A	7
440 V	I _e	A	7
500 V	I _e	A	6
660 V 690 V	I _e	A	5
Motor rating	P	kWh	
220 V 230 V	P	kW	2
240 V	P	kW	2.2
380 V 400 V	P	kW	3
415 V	P	kW	3.4
440 V	P	kW	3.6
500 V	P	kW	3.5
660 V 690 V	P	kW	4.4

DC

Rated operational current, open			
DC-1			
60 V	I _e	A	20
110 V	I _e	A	20
220 V	I _e	A	15

Current heat loss

3 pole, at I _{th} (60°)		W	2.5
Current heat loss at I _e to AC-3/400 V		W	0.9
Impedance per pole		mΩ	2.5

Magnet systems

Voltage tolerance			
AC operated	Pick-up	x U _c	0.8 - 1.1
Drop-out voltage AC operated	Drop-out	x U _c	0.3 - 0.6
Power consumption of the coil in a cold state and 1.0 x U _S			
50/60 Hz	Pick-up	VA	27 25
50/60 Hz	Sealing	VA	4.2 3.3
50/60 Hz	Sealing	W	1.4 1.2
Duty factor		% DF	100
Changeover time at 100 % U _S (recommended value)			
Main contacts			
AC operated			
Closing delay		ms	15 - 21
Opening delay		ms	9 - 18
Arcing time		ms	10
Lifespan, mechanical; Coil 50/60 Hz	x 10 ⁶		Mechanical lifespan at 50 Hz approx. 30% lower than under → Technical data general

Electromagnetic compatibility (EMC)

Emitted interference		to EN 60947-1
----------------------	--	---------------

Rating data for approved types

Switching capacity

Maximum motor rating

Three-phase

200 V
208 V

HP 3

230 V
240 V

HP 3

460 V
480 V

HP 10

575 V
600 V

HP 10

Single-phase

115 V
120 V

HP 1

230 V
240 V

HP 2

General use

A 20

Auxiliary contacts

Pilot Duty

AC operated

A600

DC operated

P300

General Use

AC

V 600

AC

A 10

DC

V 250

DC

A 1

Short Circuit Current Rating

SCCR

Basic Rating

SCCR

kA 5

max. Fuse

A 45

max. CB

A 60

480 V High Fault

SCCR (fuse)

kA 30/100

max. Fuse

A 25 Class RK5/45 Class J

600 V High Fault

SCCR (fuse)

kA 30/100

max. Fuse

A 25 Class RK5/45 Class J

Special Purpose Ratings

Electrical Discharge Lamps (Ballast)

480V 60Hz 3phase, 277V 60Hz 1phase

A 20

600V 60Hz 3phase, 347V 60Hz 1phase

A 20

Incandescent Lamps (Tungsten)

480V 60Hz 3phase, 277V 60Hz 1phase

A 14

600V 60Hz 3phase, 347V 60Hz 1phase

A 14

Resistance Air Heating

480V 60Hz 3phase, 277V 60Hz 1phase

A 20

600V 60Hz 3phase, 347V 60Hz 1phase

A 20

Refrigeration Control (CSA only)

LRA 480V 60Hz 3phase

A 60

FLA 480V 60Hz 3phase

A 10

LRA 600V 60Hz 3phase

A 60

FLA 600V 60Hz 3phase

A 10

Definite Purpose Ratings (100,000 cycles acc. to UL 1995)

LRA 480V 60Hz 3phase

A 72

FLA 480V 60Hz 3phase

A 12

Elevator Control

200V 60Hz 3phase	HP	2
200V 60Hz 3phase	A	7.8
240V 60Hz 3phase	HP	2
240V 60Hz 3phase	A	6.8
480V 60Hz 3phase	HP	7.5
480V 60Hz 3phase	A	11
600V 60Hz 3phase	HP	7.5
600V 60Hz 3phase	A	9

Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I_n	A	12
Heat dissipation per pole, current-dependent	P_{vid}	W	0.3
Equipment heat dissipation, current-dependent	P_{vid}	W	0
Static heat dissipation, non-current-dependent	P_{vs}	W	1.4
Heat dissipation capacity	P_{diss}	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 8.0


Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015])			
Rated control supply voltage U_s at AC 50Hz	V	220 - 220	
Rated control supply voltage U_s at AC 60Hz	V	220 - 220	
Rated control supply voltage U_s at DC	V	0 - 0	
Voltage type for actuating		AC	
Rated operation current I_e at AC-1, 400 V	A	22	
Rated operation current I_e at AC-3, 400 V	A	12	


Rated operation power at AC-3, 400 V	kW	5.5
Rated operation current Ie at AC-4, 400 V	A	7
Rated operation power at AC-4, 400 V	kW	3
Rated operation power NEMA	kW	7.4
Modular version		No
Number of auxiliary contacts as normally open contact		1
Number of auxiliary contacts as normally closed contact		0
Type of electrical connection of main circuit		Screw connection
Number of normally closed contacts as main contact		0
Number of normally open contacts as main contact		3

Approvals

Product Standards	IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking
UL File No.	E29096
UL Category Control No.	NLDX
CSA File No.	012528
CSA Class No.	2411-03, 3211-04
North America Certification	UL listed, CSA certified
Specially designed for North America	No

Characteristics

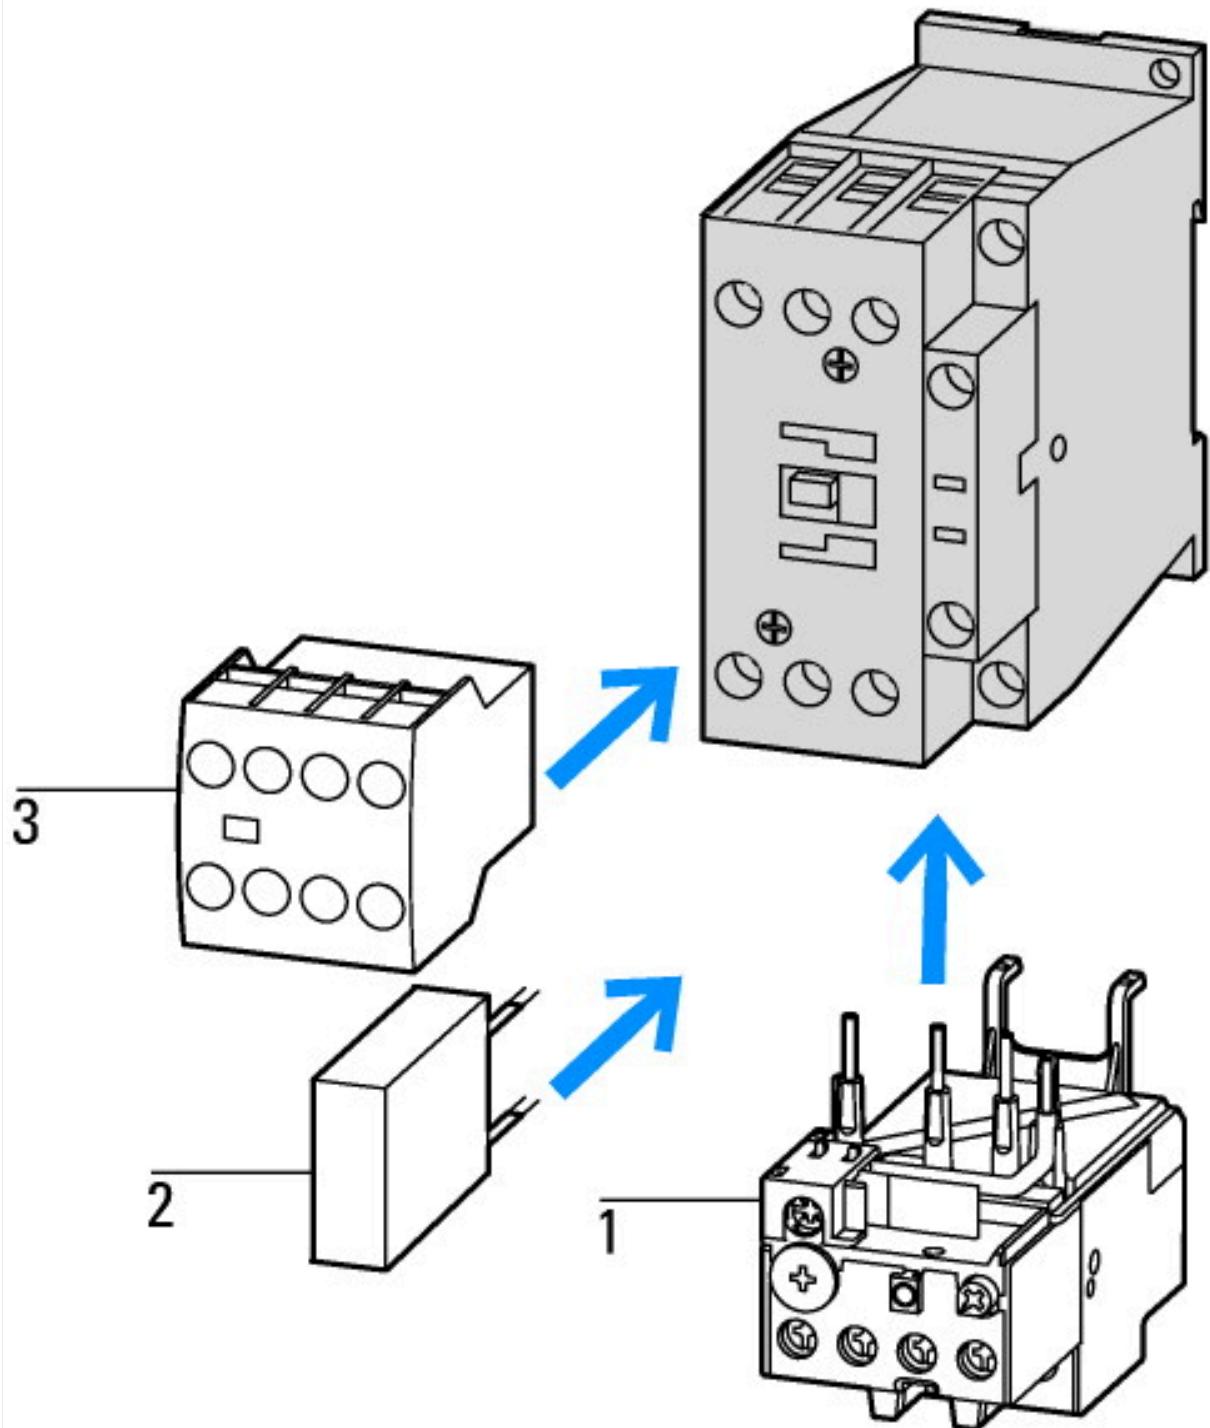

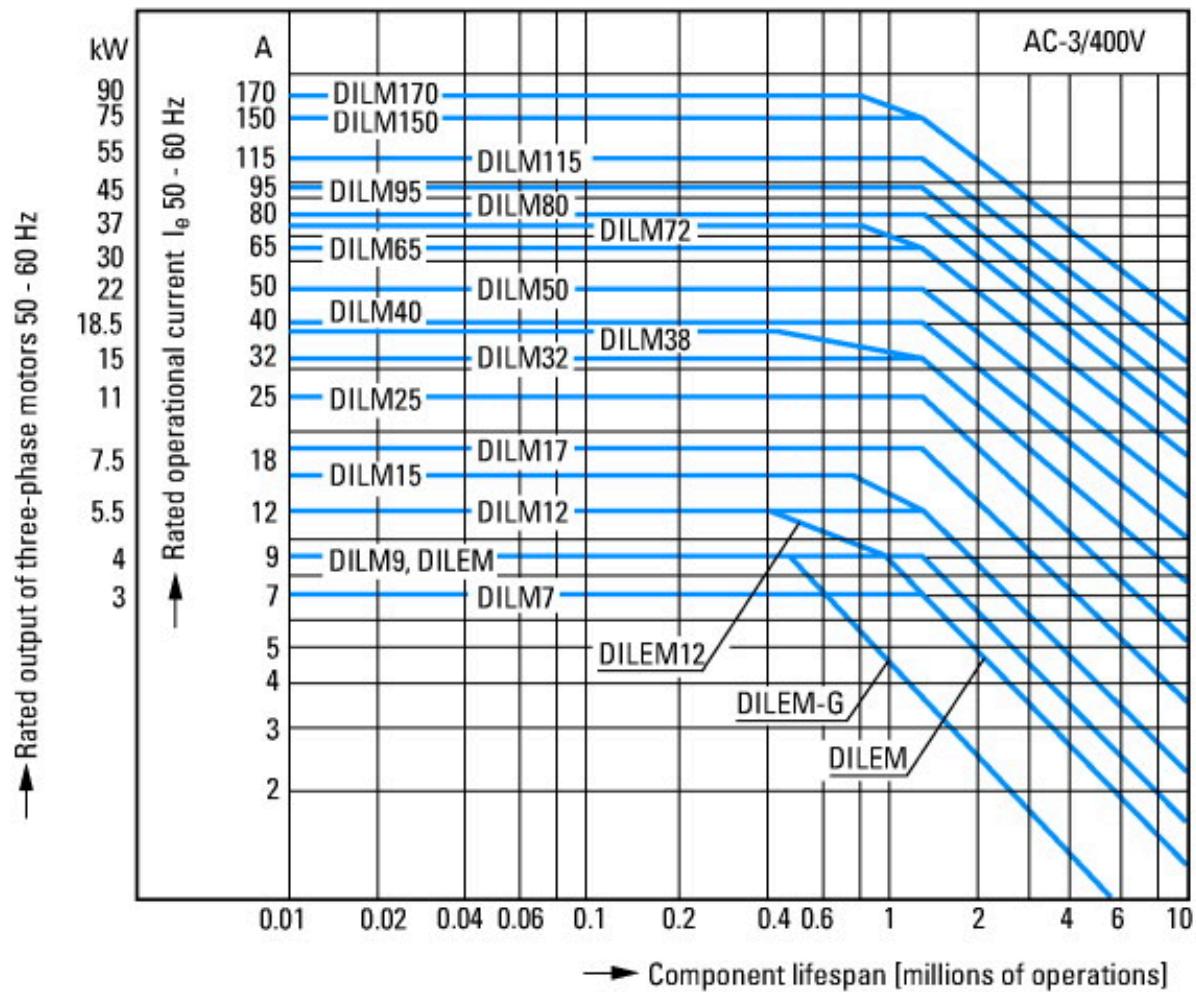

Squirrel-cage motor
Operating characteristics

Starting: from rest
Stopping: after attaining full running speed

Electrical characteristics
Make: up to 6 x rated motor current
Break: up to 1 x rated motor current

Utilization category
100 % AC-3

Typical applications
Compressors

Lifts

Mixers

Pumps

Escalators

Agitators

Fans

Conveyor belts


Centrifuges


Hinged flaps

Bucket-elevators

Air conditioning system

General drives in manufacturing and processing machines

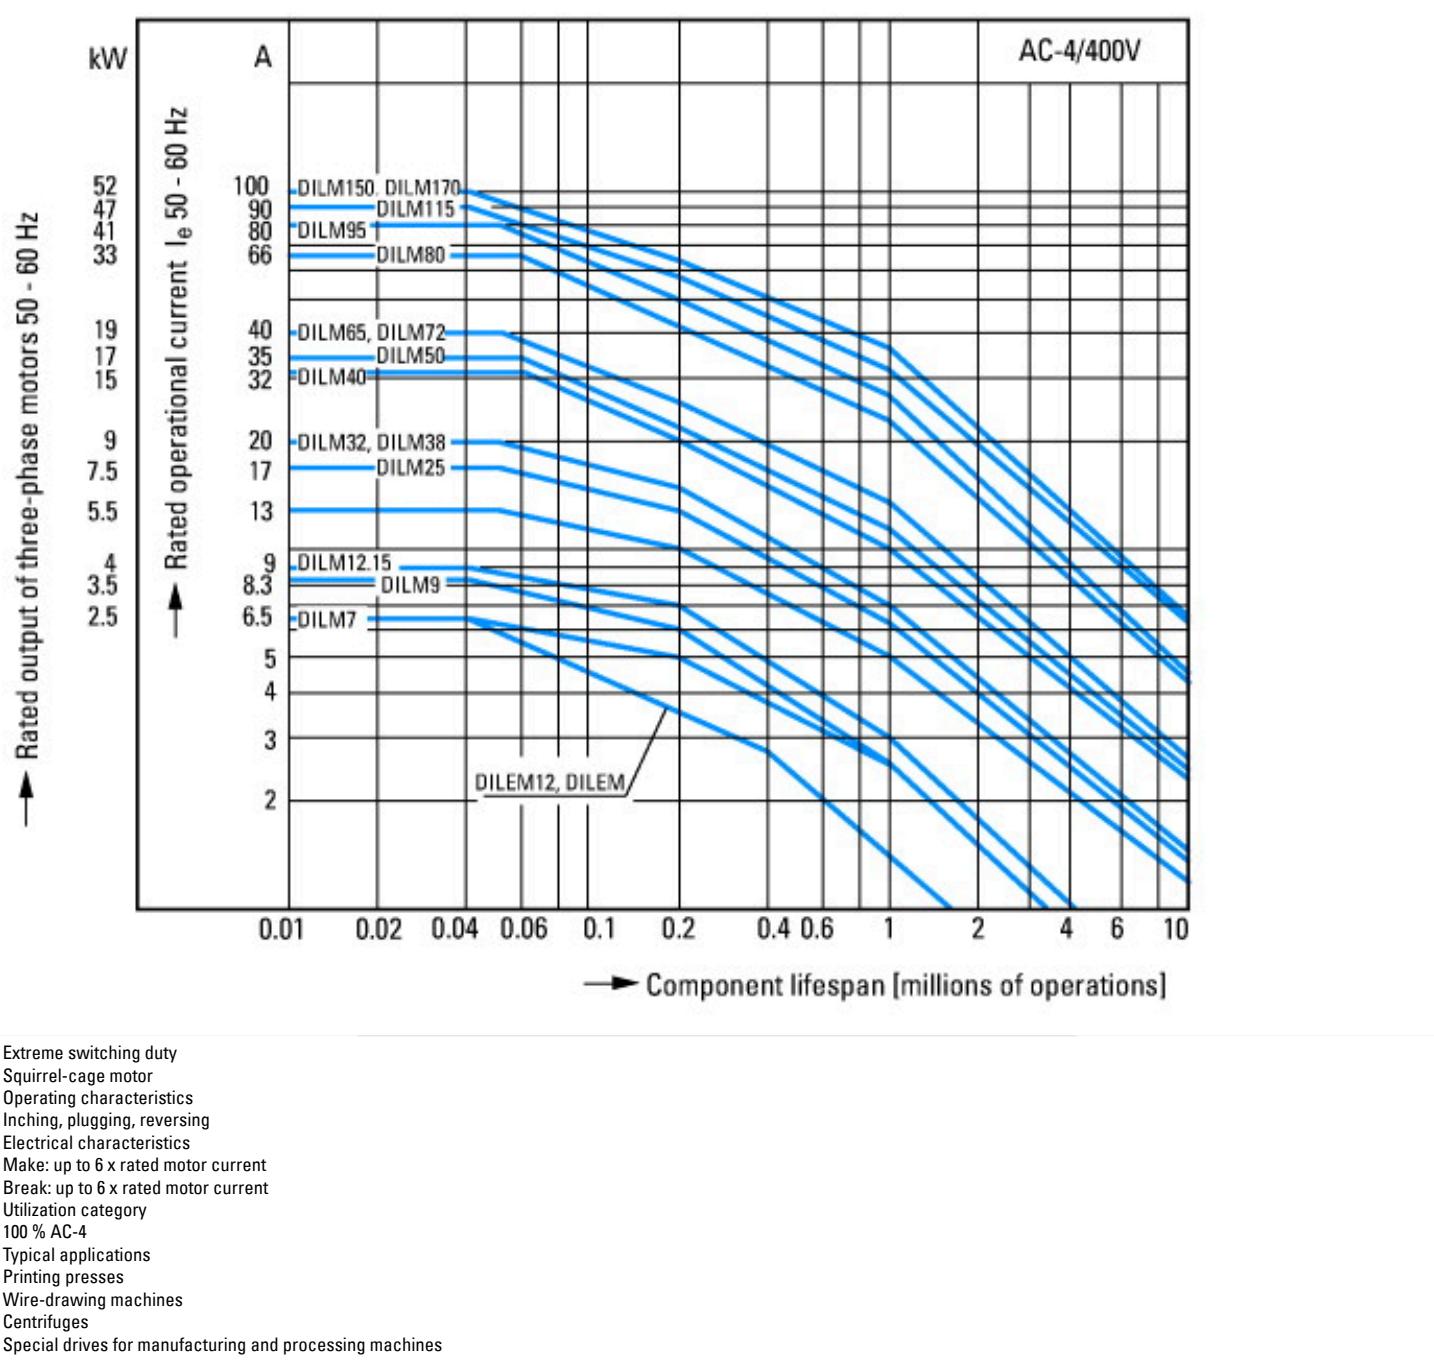

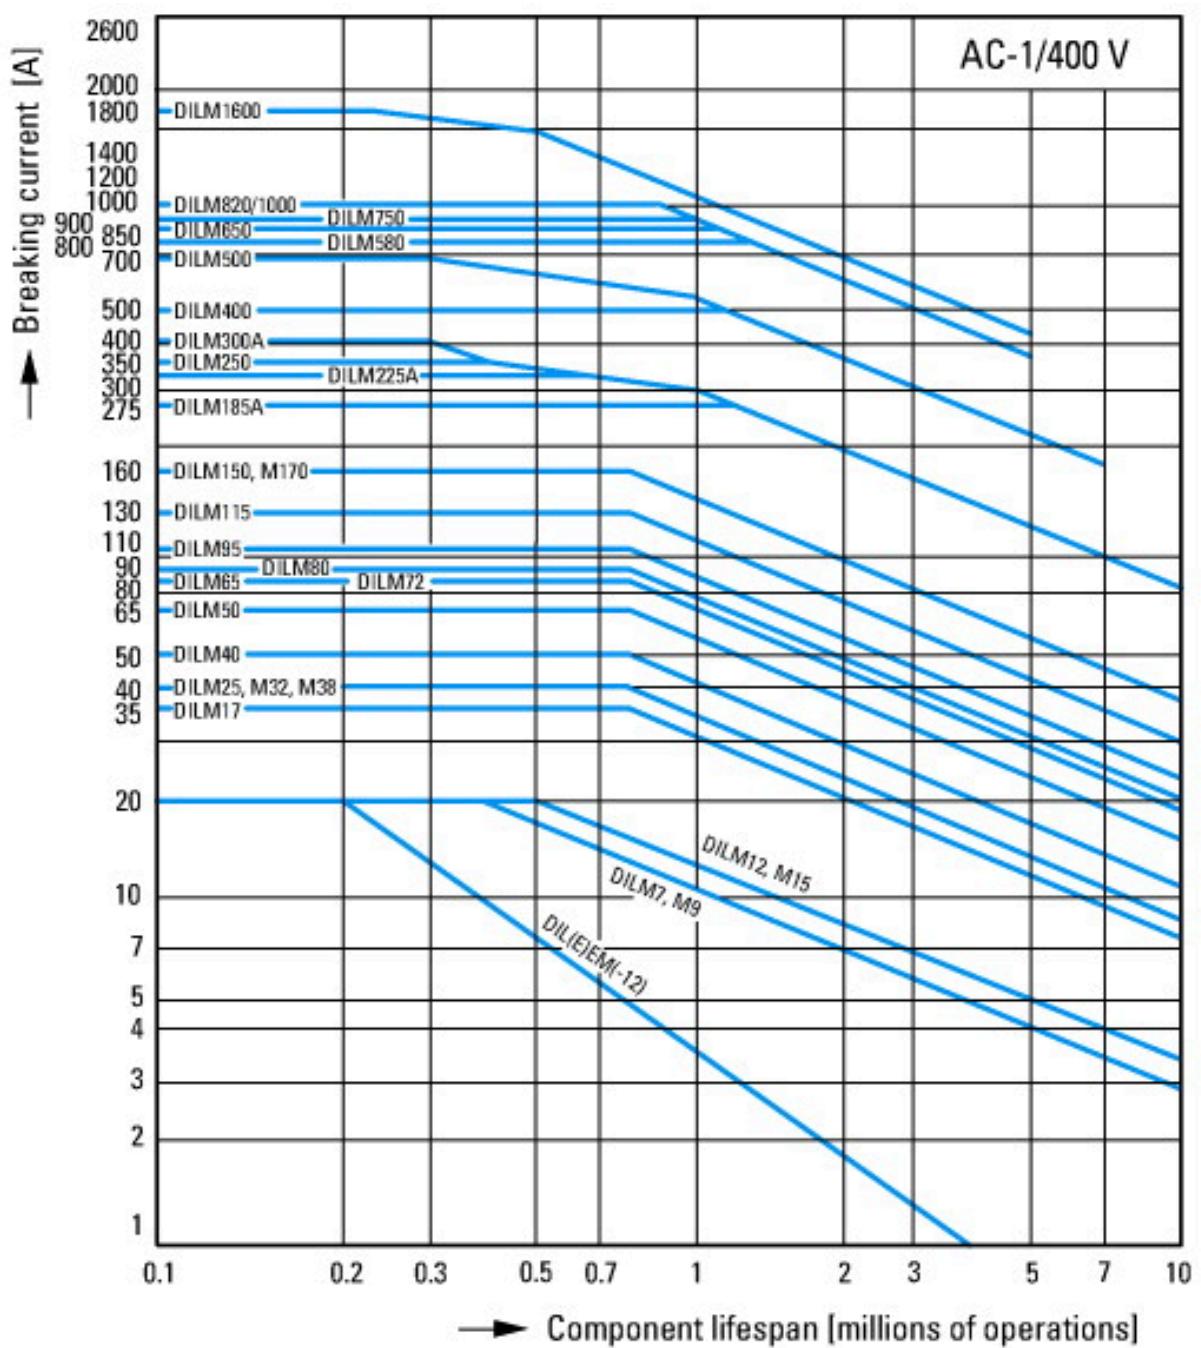

Switching conditions for non-motor consumers, 3 pole, 4 pole

Operating characteristics

Non inductive and slightly inductive loads

Electrical characteristics

Switch on: 1 x rated operational current

Switch off: 1 x rated operational current


Utilization category

100 % AC-1


Typical examples of application

Electric heat


Dimensions

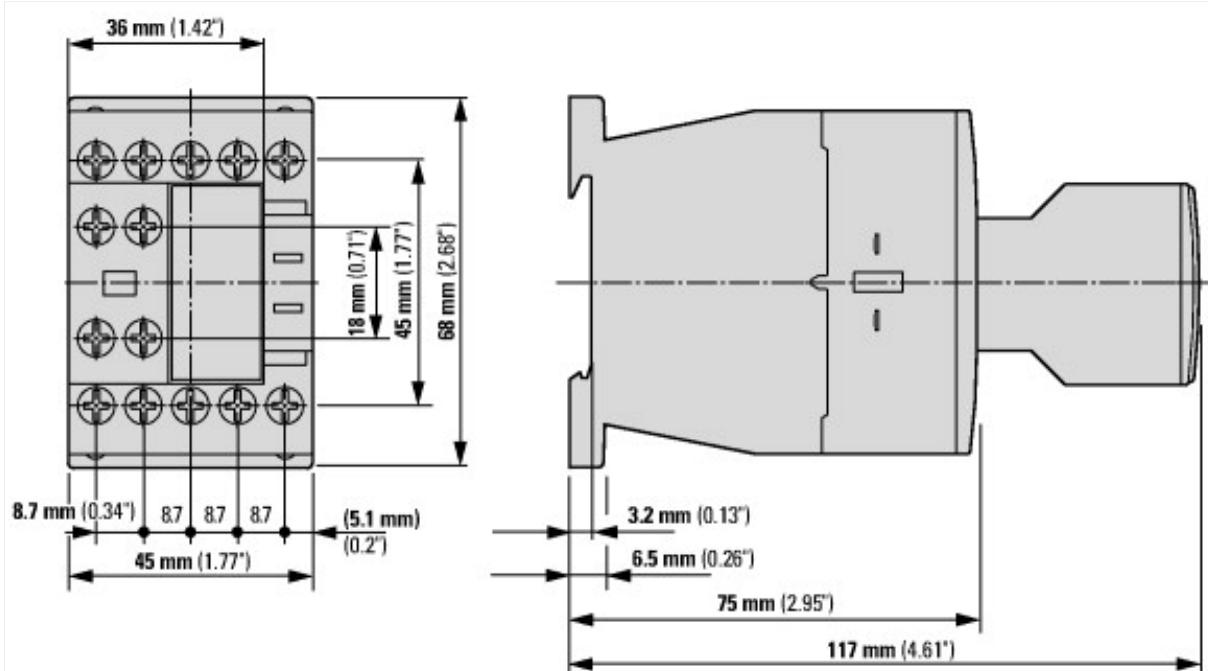

Contactor with auxiliary contact module DILM32-XHI.../DILA-XHI...

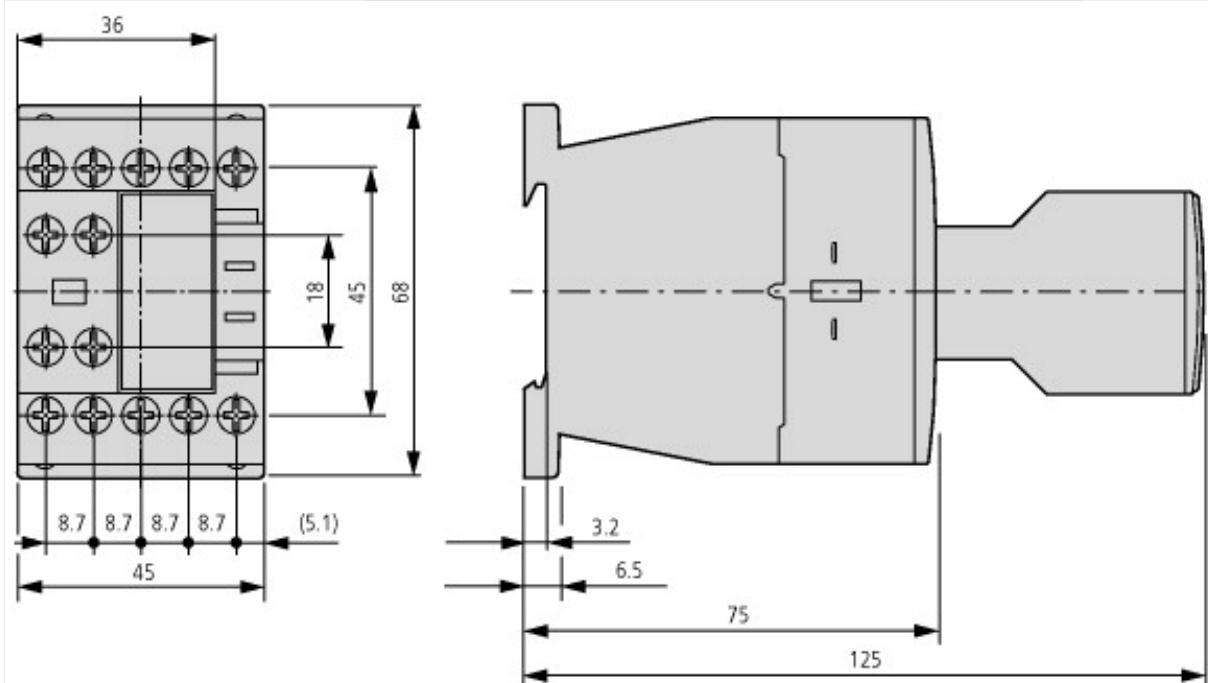

Contactor with auxiliary contact module DILA-XHIT...

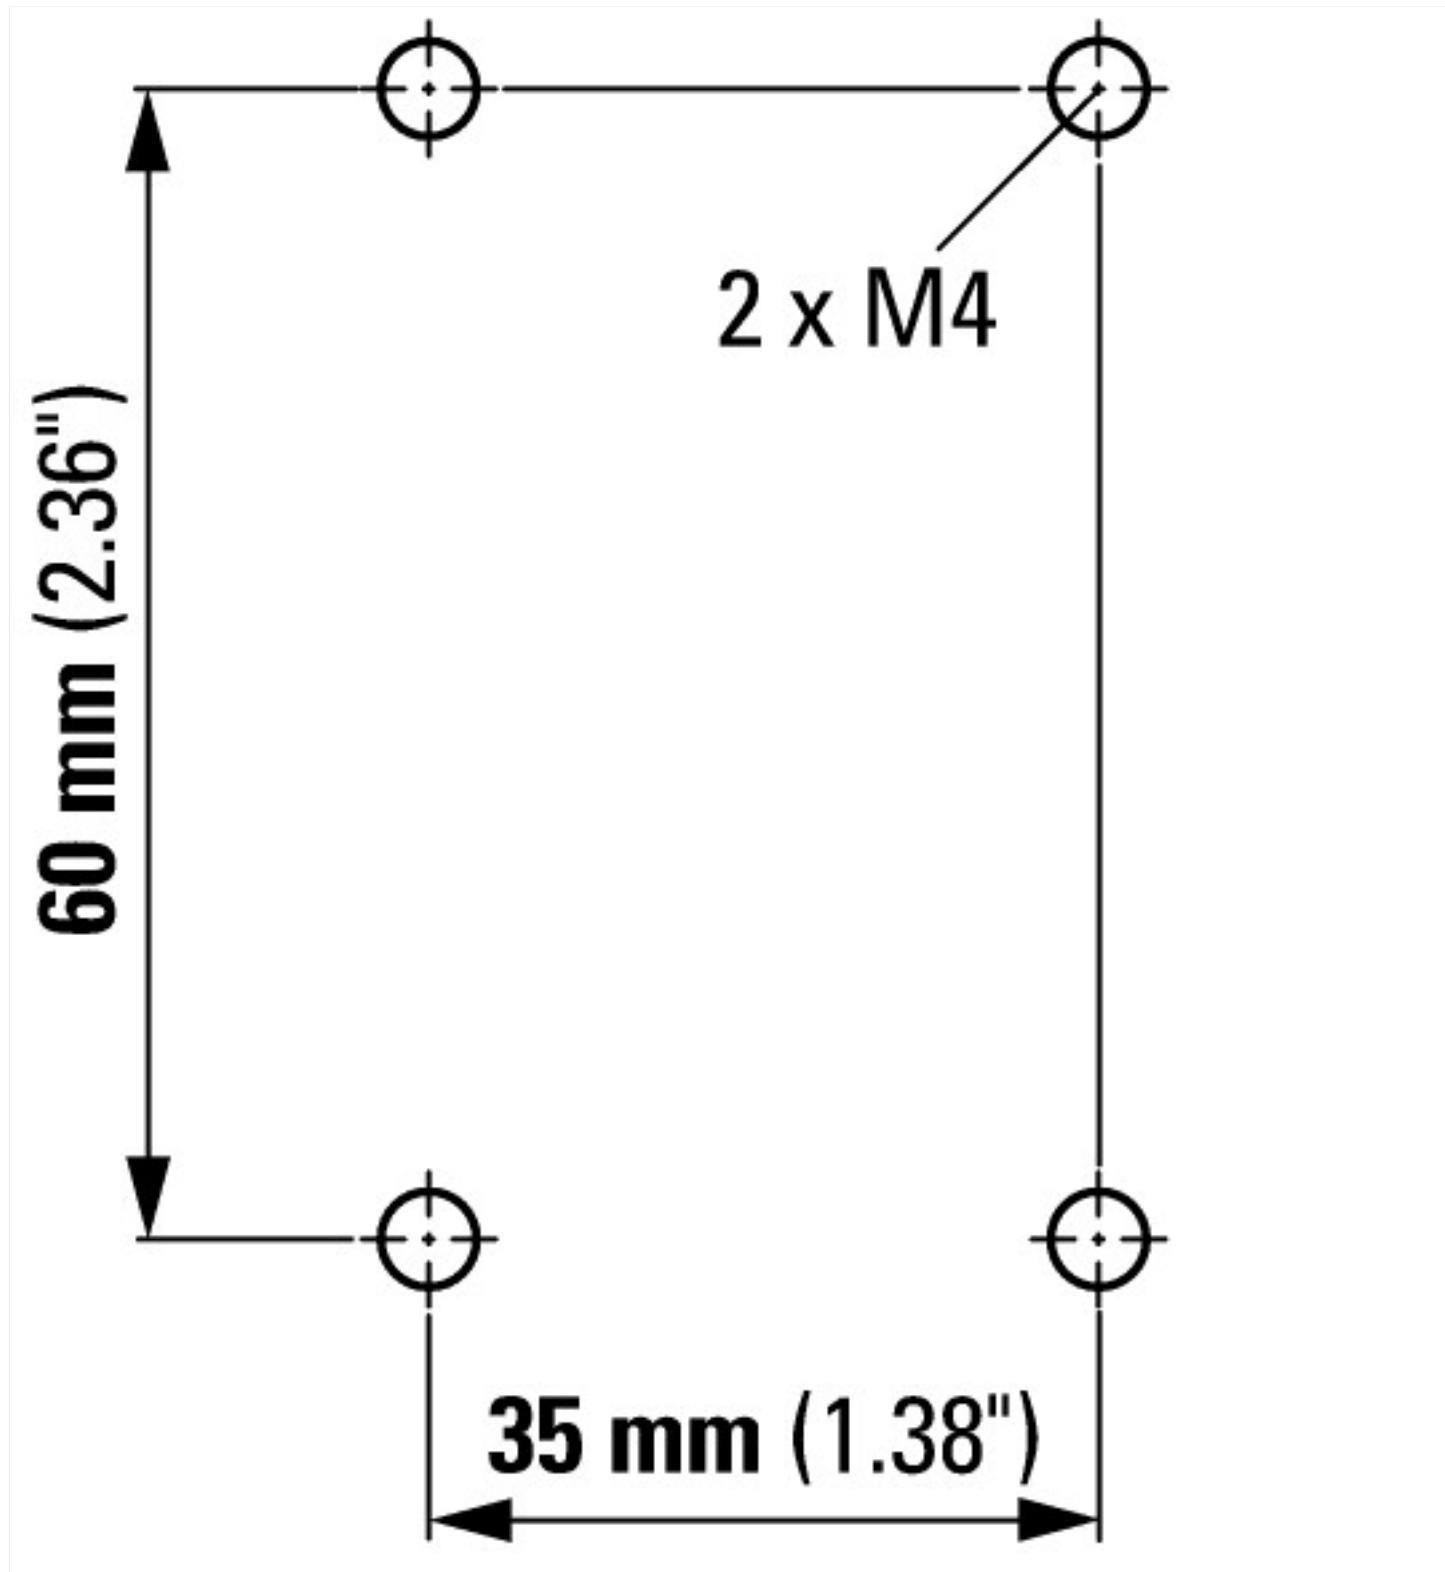

Additional product information (links)

IL03407013Z (AWA2100-2126) Contactors

IL03407013Z (AWA2100-2126) Contactors	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z.pdf
Motor starters and "Special Purpose Ratings" for the North American market	http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf
Switchgear of Power Factor Correction Systems	http://www.moeller.net/binary/ver_techpapers/ver934en.pdf
X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely	http://www.moeller.net/binary/ver_techpapers/ver938en.pdf
Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions	http://www.moeller.net/binary/ver_techpapers/ver944en.pdf
Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors	http://www.moeller.net/binary/ver_techpapers/ver949en.pdf
Switchgear for Luminaires	http://www.moeller.net/binary/ver_techpapers/ver955en.pdf

Standard Compliant and Functionally Safe
Engineering Design with Mechanical Auxiliary
Contacts http://www.moeller.net/binary/ver_techpapers/ver956en.pdf

The Interaction of Contactors with PLCs http://www.moeller.net/binary/ver_techpapers/ver957en.pdf

Busbar Component Adapters for modern
Industrial control panels http://www.moeller.net/binary/ver_techpapers/ver960en.pdf