

# Specifications



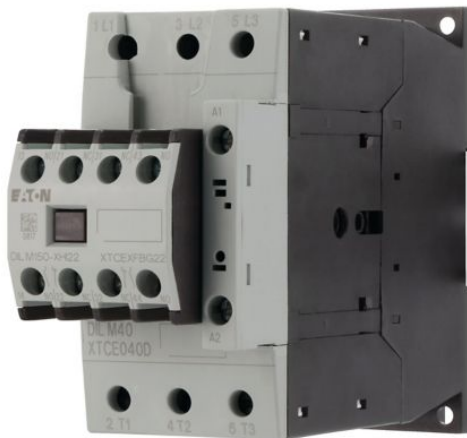


Photo is representative



## Eaton 277812

Eaton Moeller® series DILM Contactor, 380 V 400 V 18.5 kW, 2 N/O, 2 NC, RDC 24: 24 - 27 V DC, DC operation, Screw terminals

### General specifications

<b>PRODUCT NAME</b>	Eaton Moeller® series DILM contactor
<b>CATALOG NUMBER</b>	277812
<b>MODEL CODE</b>	DILM40-22(RDC24)
<b>EAN</b>	4015082778125
<b>PRODUCT LENGTH/DEPTH</b>	147 mm
<b>PRODUCT HEIGHT</b>	115 mm
<b>PRODUCT WIDTH</b>	55 mm
<b>PRODUCT WEIGHT</b>	1.082 kg
<b>COMPLIANCES</b>	CE Marked
<b>CERTIFICATIONS</b>	EN 60947-4-1 IEC 60947-4-1 UL 508 CSA Std. C22.2 No. 14-05 VDE UL Category Control No.: NLDX CSA Class No.: 2411-03, 3211-04 UL VDE 0660 UL 60947-4-1 CSA File No.: 012528 IEC/EN 60947-4-1 CE CSA-C22.2 No. 60947-4-1-14 UL File No.: E29096 CSA IEC/EN 60947
<b>CATALOG NOTES</b>	Contacts according to EN 50012
<b>GLOBAL CATALOG</b>	277812



Powering Business Worldwide

## Product specifications

### ELECTRICAL

#### CONNECTION TYPE FOR AUXILIARY- AND CONTROL-CURRENT CIRCUIT

Screw connection

#### AMPERAGE RATING

40A

#### NUMBER OF POLES

Three-pole

#### VOLTAGE RATING

24-27 Vdc

#### 10.10 TEMPERATURE RISE

The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.

#### 10.11 SHORT-CIRCUIT RATING

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

#### 10.12 ELECTROMAGNETIC COMPATIBILITY

Is the panel builder's responsibility. The specifications for the switchgear must be observed.

#### 10.13 MECHANICAL FUNCTION

The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

#### 10.2.2 CORROSION RESISTANCE

Meets the product standard's requirements.

#### 10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES

Meets the product standard's requirements.

#### 10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT

Meets the product standard's requirements.

#### 10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS

Meets the product standard's requirements.

#### 10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION

Meets the product standard's requirements.

#### 10.2.5 LIFTING

Does not apply, since the entire switchgear needs to be evaluated.

## Resources

[eaton-product-overview-for-machinery-catalogue-ca08103003zen-en-us.pdf](#)

### CATALOGS

[SmartWire-DT Catalog](#)

[Product Range Catalog](#)  
[Switching and protecting motors](#)

### CHARACTERISTIC CURVE

[eaton-contactors-switch-dilm-characteristic-curve-002.eps](#)

[eaton-contactors-component-dilm-characteristic-curve-003.eps](#)

[eaton-contactors-short-time-loading-dilm-characteristic-curve.eps](#)

[eaton-contactors-switch-dilm-characteristic-curve.eps](#)

### DECLARATIONS OF CONFORMITY

[DA-DC-00004782.pdf](#)

[DA-DC-00004817.pdf](#)

### DRAWINGS

[eaton-contactors-dilm-dimensions-012.eps](#)

[eaton-contactors-dilm-dimensions-002.eps](#)

[eaton-contactors-mounting-dilm-dimensions.eps](#)

[eaton-contactors-mounting-dilm-dimensions-002.eps](#)

[eaton-contactors-mounting-dilm-3d-drawing.eps](#)

[eaton-contactors-contact-dilm-3d-drawing-003.eps](#)

[eaton-general-ie-ready-dilm-contactor-standards.eps](#)

### ECAD MODEL

[ETN.277812.edz](#)

### INSTALLATION INSTRUCTIONS

[IL03407033Z](#)

<b>10.2.6 MECHANICAL IMPACT</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.2.7 INSCRIPTIONS</b>	Meets the product standard's requirements.
<b>10.3 DEGREE OF PROTECTION OF ASSEMBLIES</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.4 CLEARANCES AND CREEPAGE DISTANCES</b>	Meets the product standard's requirements.
<b>10.5 PROTECTION AGAINST ELECTRIC SHOCK</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS</b>	Does not apply, since the entire switchgear needs to be evaluated.
<b>10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS</b>	Is the panel builder's responsibility.
<b>10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS</b>	Is the panel builder's responsibility.
<b>10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH</b>	Is the panel builder's responsibility.
<b>10.9.3 IMPULSE WITHSTAND VOLTAGE</b>	Is the panel builder's responsibility.
<b>10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL</b>	Is the panel builder's responsibility.
<b>FITTED WITH:</b>	Suppressor circuit in actuating electronics Mirror contact
<b>OPERATING FREQUENCY</b>	5000 mechanical Operations/h (DC operated)
<b>POLLUTION DEGREE</b>	3
<b>CLIMATIC PROOFING</b>	Damp heat, cyclic, to IEC 60068-2-30 Damp heat, constant, to IEC 60068-2-78
<b>RATED IMPULSE WITHSTAND VOLTAGE (UIMP)</b>	8000 V AC
<b>UTILIZATION CATEGORY</b>	AC-1: Non-inductive or slightly inductive loads, resistance furnaces AC-3: Normal AC induction motors: starting, switch off during running AC-4: Normal AC induction

<b>INSTALLATION VIDEOS</b>	<a href="#">WIN-WIN with push-in technology</a>
<b>MCAD MODEL</b>	<a href="#">dil_m40_65_22.stp</a> <a href="#">dil_m40_65_22.dwg</a> <a href="#">DA-CS-dil_m40</a>
<b>WIRING DIAGRAMS</b>	<a href="#">2100SWI-125</a>

	motors: starting, plugging, reversing, inching
<b>CONNECTION</b>	Screw terminals
<b>AMBIENT OPERATING TEMPERATURE - MAX</b>	60 °C
<b>AMBIENT OPERATING TEMPERATURE - MIN</b>	-25 °C
<b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MAX</b>	40 °C
<b>AMBIENT OPERATING TEMPERATURE (ENCLOSED) - MIN</b>	25 °C
<b>AMBIENT STORAGE TEMPERATURE - MAX</b>	80 °C
<b>AMBIENT STORAGE TEMPERATURE - MIN</b>	40 °C
<b>ASSIGNED MOTOR POWER AT 115/120 V, 60 HZ, 1-PHASE</b>	3 HP
<b>ASSIGNED MOTOR POWER AT 200/208 V, 60 HZ, 3-PHASE</b>	10 HP
<b>ASSIGNED MOTOR POWER AT 230/240 V, 60 HZ, 1-PHASE</b>	7.5 HP
<b>ASSIGNED MOTOR POWER AT 230/240 V, 60 HZ, 3-PHASE</b>	15 HP
<b>ASSIGNED MOTOR POWER AT 460/480 V, 60 HZ, 3-PHASE</b>	30 HP
<b>ASSIGNED MOTOR POWER AT 575/600 V, 60 HZ, 3-PHASE</b>	40 HP
<b>CONVENTIONAL THERMAL CURRENT ITH (1-POLE, ENCLOSED)</b>	112 A
<b>CONVENTIONAL THERMAL CURRENT ITH (3-POLE, ENCLOSED)</b>	45 A
<b>CONVENTIONAL THERMAL CURRENT ITH AT 55°C (3-POLE, OPEN)</b>	55 A
<b>CONVENTIONAL THERMAL CURRENT ITH OF MAIN CONTACTS (1- POLE, OPEN)</b>	125 A
<b>EQUIPMENT HEAT</b>	6.6 W

<b>DISSIPATION, CURRENT-DEPENDENT PVID</b>	
<b>HEAT DISSIPATION CAPACITY PDISS</b>	0 W
<b>HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID</b>	2.2 W
<b>SWITCHING TIME (DC OPERATED, MAKE CONTACTS, CLOSING DELAY) - MAX</b>	54 ms
<b>SWITCHING TIME (DC OPERATED, MAKE CONTACTS, OPENING DELAY) - MAX</b>	24 ms
<b>APPLICATION</b>	Contactors for Motors
<b>PRODUCT CATEGORY</b>	Contactors
<b>PROTECTION</b>	Finger and back-of-hand proof, Protection against direct contact when actuated from front (EN 50274)
<b>ARCING TIME</b>	10 ms
<b>ELECTRICAL CONNECTION TYPE OF MAIN CIRCUIT</b>	Screw connection
<b>SCREWDRIVER SIZE</b>	0.8 x 5.5/1 x 6 mm, Terminal screw, Standard screwdriver 2, Terminal screw, Pozidriv screwdriver
<b>VOLTAGE TYPE</b>	DC
<b>DEGREE OF PROTECTION</b>	IP00
<b>NUMBER OF AUXILIARY CONTACTS (NORMALLY CLOSED CONTACTS)</b>	2
<b>NUMBER OF AUXILIARY CONTACTS (NORMALLY OPEN CONTACTS)</b>	2
<b>NUMBER OF CONTACTS (NORMALLY CLOSED CONTACTS)</b>	2
<b>NUMBER OF CONTACTS (NORMALLY CLOSED) AS MAIN CONTACT</b>	0
<b>NUMBER OF CONTACTS (NORMALLY OPEN CONTACTS)</b>	2
<b>NUMBER OF MAIN</b>	3

<b>CONTACTS (NORMALLY OPEN CONTACT)</b>	
<b>OPERATING TEMPERATURE - MAX</b>	60 °C
<b>OPERATING TEMPERATURE - MIN</b>	-25 °C
<b>POWER CONSUMPTION (PICK-UP) AT DC</b>	24 W
<b>POWER CONSUMPTION (SEALING) AT DC</b>	1 W
<b>RATED BREAKING CAPACITY AT 220/230 V</b>	400 A
<b>RATED BREAKING CAPACITY AT 380/400 V</b>	400 A
<b>RATED BREAKING CAPACITY AT 500 V</b>	400 A
<b>RATED BREAKING CAPACITY AT 660/690 V</b>	250 A
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MAX</b>	0 V
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 50 HZ - MIN</b>	0 V
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MAX</b>	0 V
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT AC, 60 HZ - MIN</b>	0 V
<b>CONTACT CONFIGURATION</b>	2 NO, 2 NC
<b>DROP-OUT VOLTAGE</b>	0.6 - 0.15 x UC, DC operated At least smoothed two-phase bridge rectifier or three-phase rectifier
<b>OVERVOLTAGE CATEGORY</b>	III
<b>DUTY FACTOR</b>	100 %
<b>EMITTED INTERFERENCE</b>	According to EN 60947-1
<b>INTERFERENCE IMMUNITY</b>	According to EN 60947-1
<b>LIFESPAN, MECHANICAL</b>	10,000,000 Operations (DC operated) 7,000,000 Operations (Coil 50/60 Hz)
<b>PICK-UP VOLTAGE</b>	0.7 - 1.2 V DC x Uc

	24 - 27 V DC (RDC 24)
<b>SAFE ISOLATION</b>	440 V AC, Between the contacts, According to EN 61140 440 V AC, Between coil and contacts, According to EN 61140
<b>SCREW SIZE</b>	M3.5, Terminal screw, Control circuit cables M6, Terminal screw, Main cables
<b>TERMINAL CAPACITY (STRANDED)</b>	1 x (16 - 50) mm <sup>2</sup> , Main cables 2 x (16 - 35) mm <sup>2</sup> , Main cables
<b>SWITCHING CAPACITY (AUXILIARY CONTACTS, GENERAL USE)</b>	1 A, 250 V DC, (UL/CSA) 15 A, 600 V AC, (UL/CSA)
<b>SWITCHING CAPACITY (AUXILIARY CONTACTS, PILOT DUTY)</b>	P300, DC operated (UL/CSA) A600, AC operated (UL/CSA)
<b>TERMINAL CAPACITY (COPPER BAND)</b>	2 x (6 x 9 x 0.8) mm (Number of segments x width x thickness), Main cables
<b>TERMINAL CAPACITY (FLEXIBLE WITH FERRULE)</b>	2 x (0.75 - 2.5) mm <sup>2</sup> , Control circuit cables 2 x (0.75 - 25) mm <sup>2</sup> , Main cables 1 x (0.75 - 35) mm <sup>2</sup> , Main cables 1 x (0.75 - 2.5) mm <sup>2</sup> , Control circuit cables
<b>SHOCK RESISTANCE</b>	7 g, N/O auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 10 g, N/O main contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 5 g, N/C auxiliary contact, Mechanical, according to IEC/EN 60068-2-27, Half-sinusoidal shock 10 ms 7 g, N/O auxiliary contact, Mechanical, according to IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms 10 g, N/O main contact, Mechanical, according to

	IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms 5 g, N/C auxiliary contact, Mechanical, according to IEC/EN 60068-2-27 when tabletop-mounted, Half-sinusoidal shock 10 ms
<b>TERMINAL CAPACITY (SOLID)</b>	2 x (0.75 - 2.5) mm <sup>2</sup> , Control circuit cables 1 x (0.75 - 16) mm <sup>2</sup> , Main cables 2 x (0.75 - 16) mm <sup>2</sup> , Main cables 1 x (0.75 - 2.5) mm <sup>2</sup> , Control circuit cables
<b>TERMINAL CAPACITY (SOLID/STRANDED AWG)</b>	18 - 14, Control circuit cables Single 14 - 1, double 14 - 2, Main cables
<b>SWITCHING CAPACITY (MAIN CONTACTS, GENERAL USE)</b>	63 A, Maximum motor rating (UL/CSA)
<b>TIGHTENING TORQUE</b>	1.2 Nm, Screw terminals, Control circuit cables 3.3 Nm, Screw terminals, Main cables
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MAX</b>	27 V
<b>RATED CONTROL SUPPLY VOLTAGE (US) AT DC - MIN</b>	24 V
<b>RATED INSULATION VOLTAGE (UI)</b>	690 V
<b>RATED MAKING CAPACITY UP TO 690 V (COS PHI TO IEC/EN 60947)</b>	560 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-1, 380 V, 400 V, 415 V</b>	60 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 220 V, 230 V, 240 V</b>	40 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 380 V, 400 V, 415 V</b>	40 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 440 V</b>	40 A



<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 500 V</b>	40 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-3, 660 V, 690 V</b>	25 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-4, 220 V, 230 V, 240 V</b>	18 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-4, 400 V</b>	18 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-4, 440 V</b>	18 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-4, 500 V</b>	18 A
<b>RATED OPERATIONAL CURRENT (IE) AT AC-4, 660 V, 690 V</b>	14 A
<b>RATED OPERATIONAL CURRENT (IE) AT DC-1, 110 V</b>	50 A
<b>RATED OPERATIONAL CURRENT (IE) AT DC-1, 220 V</b>	45 A
<b>RATED OPERATIONAL CURRENT (IE) AT DC-1, 60 V</b>	50 A
<b>RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)</b>	40 A
<b>RATED OPERATIONAL POWER AT AC-3, 240 V, 50 HZ</b>	13.5 kW
<b>RATED OPERATIONAL POWER AT AC-3, 380/400 V, 50 HZ</b>	18.5 kW
<b>RATED OPERATIONAL POWER AT AC-3, 415 V, 50 HZ</b>	24 kW
<b>RATED OPERATIONAL POWER AT AC-4, 220/230 V, 50 HZ</b>	5 kW
<b>RATED OPERATIONAL POWER AT AC-4, 240 V, 50 HZ</b>	5.5 kW
<b>RATED OPERATIONAL POWER AT AC-4, 380/400</b>	9 kW

<b>V, 50 HZ</b>	
<b>RATED OPERATIONAL POWER AT AC-4, 415 V, 50 HZ</b>	9.5 kW
<b>RATED OPERATIONAL POWER AT AC-4, 440 V, 50 HZ</b>	10 kW
<b>RATED OPERATIONAL POWER AT AC-4, 500 V, 50 HZ</b>	11 kW
<b>RATED OPERATIONAL POWER AT AC-4, 660/690 V, 50 HZ</b>	12 kW
<b>RATED OPERATIONAL POWER (NEMA)</b>	22 kW
<b>RATED OPERATIONAL VOLTAGE (UE) AT AC - MAX</b>	690 V
<b>RESISTANCE PER POLE</b>	1.9 mΩ
<b>STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS</b>	1 W
<b>STRIPPING LENGTH (CONTROL CIRCUIT CABLE)</b>	10 mm
<b>STRIPPING LENGTH (MAIN CABLE)</b>	14 mm
<b>SHORT-CIRCUIT CURRENT RATING (BASIC RATING)</b>	250 A, max. Fuse, SCCR (UL/CSA) 250 A, max. CB, SCCR (UL/CSA) 10 kA, SCCR (UL/CSA)
<b>SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 480 V)</b>	100 A, max. CB, SCCR (UL/CSA) 30/100 kA, Fuse, SCCR (UL/CSA) 250/150 A, Class J, max. Fuse, SCCR (UL/CSA) 65 kA, CB, SCCR (UL/CSA)
<b>SHORT-CIRCUIT CURRENT RATING (HIGH FAULT AT 600 V)</b>	30/100 kA, Fuse, SCCR (UL/CSA) 30 kA, CB, SCCR (UL/CSA) 250/150 A, Class J, max. Fuse, SCCR (UL/CSA) 250 A, max. CB, SCCR (UL/CSA)
<b>SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 400 V</b>	125 A gG/gL

<b>SUITABLE FOR</b>	Also motors with efficiency class IE3
<b>SHORT-CIRCUIT PROTECTION RATING (TYPE 1 COORDINATION) AT 690 V</b>	80 A gG/gL
<b>SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 400 V</b>	63 A gG/gL
<b>SHORT-CIRCUIT PROTECTION RATING (TYPE 2 COORDINATION) AT 690 V</b>	50 A gG/gL
<b>SPECIAL PURPOSE RATING OF BALLAST ELECTRICAL DISCHARGE LAMPS</b>	79 A (480V 60Hz 3phase, 277V 60Hz 1phase) 79 A (600V 60Hz 3phase, 347V 60Hz 1phase)
<b>SPECIAL PURPOSE RATING OF ELEVATOR CONTROL</b>	25 HP, 480 V 60 Hz 3-ph, (UL/CSA) 30 HP, 600 V 60 Hz 3-ph, (UL/CSA) 34 A, 480 V 60 Hz 3-ph, (UL/CSA) 32 A, 600 V 60 Hz 3-ph, (UL/CSA) 25.3 A, 200 V 60 Hz 3-ph, (UL/CSA) 7.5 HP, 200 V 60 Hz 3-ph, (UL/CSA) 10 HP, 240 V 60 Hz 3-ph, (UL/CSA) 28 A, 240 V 60 Hz 3-ph, (UL/CSA)
<b>SPECIAL PURPOSE RATING OF RESISTANCE AIR HEATING</b>	79 A, 480 V 60 Hz 3phase, 277 V 60 Hz 1phase, (UL/CSA) 79 A, 600 V 60 Hz 3phase, 347 V 60 Hz 1phase, (UL/CSA)
<b>SPECIAL PURPOSE RATING OF TUNGSTEN INCANDESCENT LAMPS</b>	74 A, 600 V 60 Hz 3phase, 347 V 60 Hz 1phase, (UL/CSA) 74 A, 480 V 60 Hz 3phase, 277 V 60 Hz 1phase, (UL/CSA)
<b>OPERATING TEMPERATURE</b>	-25° to 60°C
<b>CONVENTIONAL THERMAL CURRENT ITH AT 40°C (3-POLE, OPEN)</b>	60 A
<b>CONVENTIONAL THERMAL CURRENT ITH</b>	57 A

<b>AT 50°C (3-POLE, OPEN)</b>	
<b>CONVENTIONAL THERMAL CURRENT ITH AT 60°C (3-POLE, OPEN)</b>	50 A
<b>RATED OPERATIONAL POWER AT AC-3, 440 V, 50 HZ</b>	25 kW
<b>RATED OPERATIONAL POWER AT AC-3, 500 V, 50 HZ</b>	28 kW
<b>RATED OPERATIONAL POWER AT AC-3, 690 V, 50 HZ</b>	23 kW
<b>ACTUATING VOLTAGE</b>	RDC 24: 24 - 27 V DC
<b>ALTITUDE</b>	Max. 2000 m
<b>OPERATING VOLTAGE AT AC, 50 HZ - MIN</b>	230 V
<b>OPERATING VOLTAGE AT AC, 50 HZ - MAX</b>	690 V
<b>OPERATING VOLTAGE AT AC, 60 HZ - MIN</b>	230 V
<b>OPERATING VOLTAGE AT AC, 60 HZ - MAX</b>	690 V
<b>OPERATING VOLTAGE AT DC - MIN</b>	24 V
<b>OPERATING VOLTAGE AT DC - MAX</b>	27 V

<b>PROJECT NAME:</b>
<b>PROJECT NUMBER:</b>
<b>PREPARED BY:</b>
<b>DATE:</b>



**Eaton Corporation plc**  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com

© 2025 Eaton. All Rights Reserved.

Follow us on social media to get the latest product and support information.

