

PR1-RSC3-LV- 24AC/21


Order No.: 2834339



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2834339>

Preassembled relay modules with screw connection, consisting of:
 Relay socket plug-in miniature power relay with power contacts, plug-in display/interference suppression module and relay retaining bracket.
 Input voltage: 24 V AC, contacts: 1 PDT, 12 A

Commercial data

GTIN (EAN)	 4 046356 044226
sales group	G300
Pack	5 pcs.
Customs tariff	85364900
Catalog page information	Page 74 (IF-2011)

Product notes

WEEE/RoHS-compliant since:
08/22/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

Nominal input voltage U_N	24 V AC
Nominal input current at U_{IN}	34 mA (at 50 Hz)
	26 mA (At 60 Hz)

Typical response time	3 ms ... 12 ms
Typical release time range	1.5 ms ... 14 ms
Operating voltage display	Yellow LED
Protective circuit	Varistor

Contact side

Contact type	Single contact, 1-PDT
Contact material	AgNi
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V (at 10 mA)
Maximum inrush current	30 A (300 ms)
Min. switching current	100 mA
Limiting continuous current	12 A
Interrupting rating (ohmic load) max.	3000 VA (for 250 V AC)

General data

Width	16 mm
Height	78.5 mm
Depth	71 mm
Test voltage relay winding/relay contact	4 kV (50 Hz, 1 min.)
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 85 °C
Operating mode	100% operating factor
Mechanical service life	3 x 10 ⁷ cycles
Standards/regulations	IEC 60664 EN 50178 IEC 62103
Pollution degree	3
Surge voltage category	III
Mounting position	Any
Assembly instructions	In rows with zero spacing



Connection data

Connection method	Screw connection
Conductor cross section solid min.	0.14 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.14 mm ²


Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	26
Conductor cross section AWG/kcmil max	14
Stripping length	8 mm
Screw thread	M3

Diagrams/Drawings

Diagram

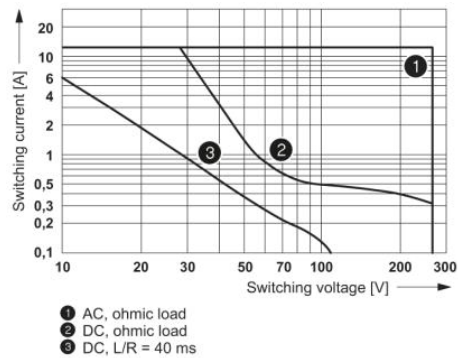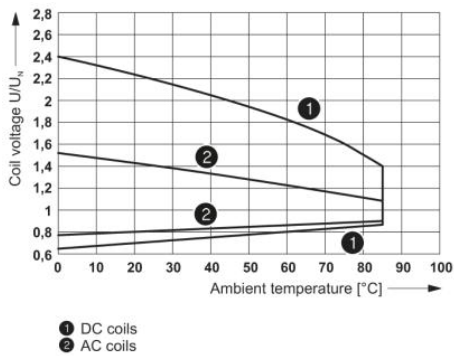


Operating voltage range of the relay

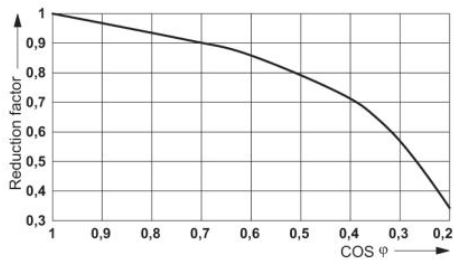


Service life reduction factor with various cos phi

Interrupting rating

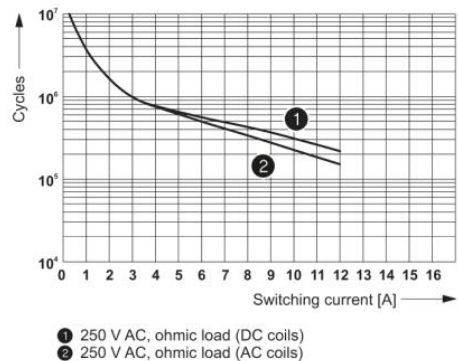

Electrical service life

Circuit diagram

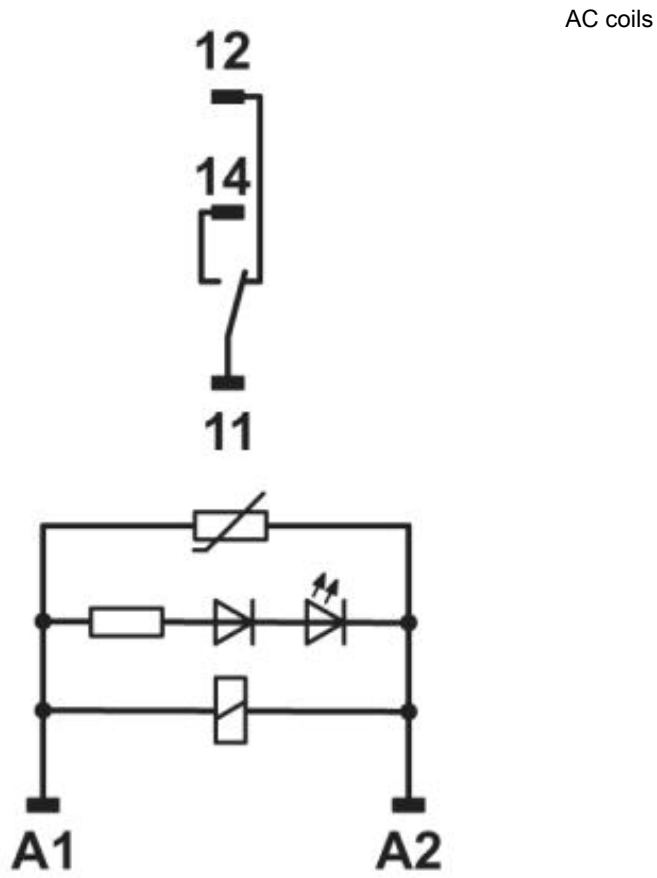

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2011 Phoenix Contact
Technical modifications reserved;