

# PLC-RPT- 24UC/ 1/S/L - Switch

2900327

<https://www.phoenixcontact.com/us/products/2900327>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



PLC-INTERFACE with switch (operation by screwdriver) and integrated power contact relay for the "Manual, Zero and Automatic" functions, with push-in connection, for mounting on DIN rail NS 35/7.5, one N/O contact, input voltage 24 V AC/DC

## Your advantages

- Just 6.2 mm wide
- Safe isolation between coil and contact side
- Floating confirmation contact
- Max. switching current of 6 A

## Commercial data

Item number	2900327
Packing unit	1 pc
Note	Made to order (non-returnable)
Sales key	C461
Product key	CK623H
Catalog page	Page 404 (C-5-2017)
GTIN	4046356507561
Weight per piece (including packing)	34.26 g
Weight per piece (excluding packing)	34.26 g
Customs tariff number	85364190
Country of origin	DE

## Technical data

### Product properties

Product type	Relay Module
Product family	PLC-INTERFACE
Application	Palm switch
Operating mode	100% operating factor

Insulation characteristics: Air clearances and creepage distances between the power circuits

Overvoltage category	III
Pollution degree	2

### Electrical properties

Maximum power dissipation for nominal condition	0.26 W
---	--------

Air clearances and creepage distances between the power circuits

Rated insulation voltage	250 V AC
Rated surge voltage	6 kV

### Input data

Coil side

Nominal input voltage $U_N$	24 V AC/DC
Input voltage range	19.4 V AC/DC ... 33.6 V AC/DC
Input voltage range in reference to $U_N$	see diagram
Drive and function	monostable
Typical input current at $U_N$	11 mA
Typical response time	6 ms
Typical release time	15 ms
Protective circuit	Bridge rectifier; Bridge rectifier
Operating voltage display	Yellow LED

### Output data

Switching

Contact switching type	1 N/O contact with switch
Type of switch contact	Single contact
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	5 V (at 100 mA)
Limiting continuous current	6 A
Maximum inrush current	on request
Min. switching current	10 mA (at 12 V)
Interrupting rating (ohmic load) max.	140 W (at 24 V DC) 20 W (at 48 V DC)

# PLC-RPT- 24UC/ 1/S/L - Switch

2900327

<https://www.phoenixcontact.com/us/products/2900327>



18 W (at 60 V DC)
23 W (at 110 V DC)
40 W (at 220 V DC)
1500 VA (for 250 V AC)

## Connection data

Connection method	Push-in connection
Stripping length	10 mm
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
	0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> (Single ferrule)
	2x 0.5 mm <sup>2</sup> ... 1 mm <sup>2</sup> (TWIN ferrule)
Conductor cross section AWG	26 ... 14

## Dimensions

Width	6.2 mm
Height	80 mm
Depth	86 mm

## Material specifications

Flammability rating according to UL 94	V0 (Housing)
--	--------------

## Environmental and real-life conditions

### Ambient conditions

Degree of protection (Relay base)	IP20 (Relay base)
Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 85 °C

## Standards and regulations

### Air clearances and creepage distances between the power circuits


Standards/regulations	IEC 60664
	EN 50178

## Mounting


Mounting type	DIN rail mounting
Assembly instructions	in rows with zero spacing
Mounting position	any

## Drawings

Circuit diagram

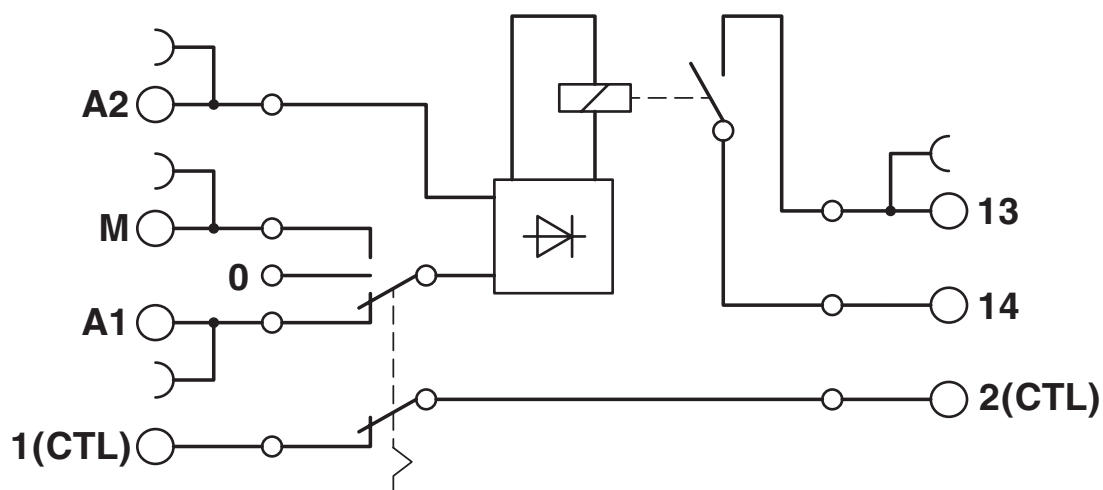

Diagram

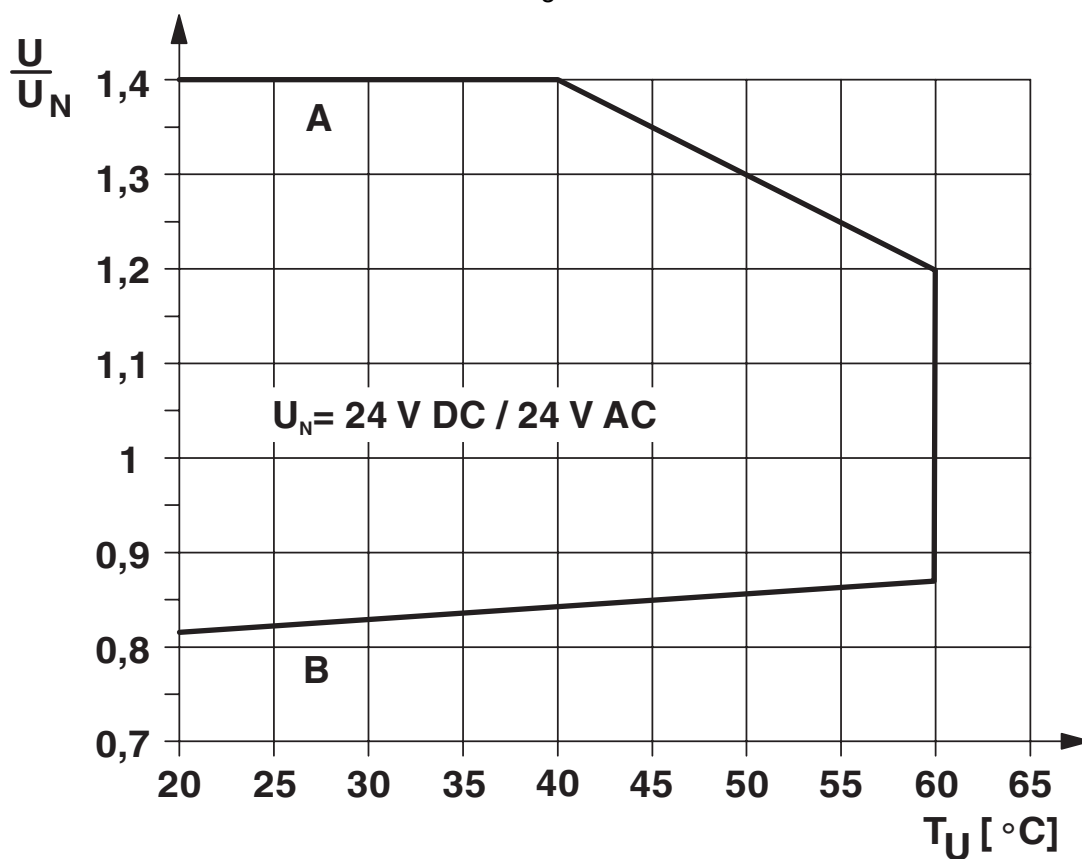


# PLC-RPT- 24UC/ 1/S/L - Switch

2900327

<https://www.phoenixcontact.com/us/products/2900327>



Application drawing

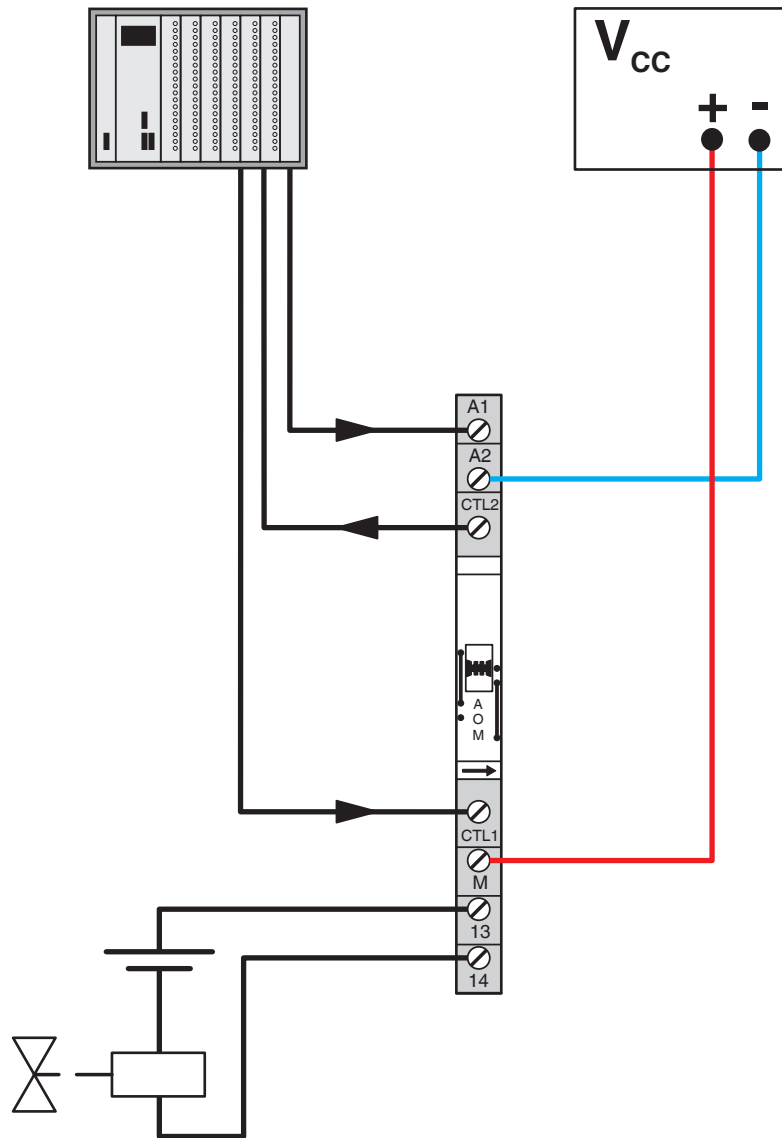

# PLC-RPT- 24UC/ 1/S/L - Switch

2900327

<https://www.phoenixcontact.com/us/products/2900327>



## Classifications

### ECLASS

ECLASS-11.0	27371601
-------------	----------

# PLC-RPT- 24UC/ 1/S/L - Switch



2900327

<https://www.phoenixcontact.com/us/products/2900327>

## Environmental product compliance

China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)