

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Plug-in miniature solid-state relay, power solid-state relay, 1 N/O contact, input: 60 V DC, output: 3 ... 33 V DC/3 A

Your advantages

- Vibration and shock resistant
- RT III-proof (wash-proof)
- Wear-free and durable
- Can be soldered on PCB
- Switching capacity of up to 24 V DC/3 A

Commercial data

Item number	2966605
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	CK06
Product key	CK61F2
Catalog page	Page 396 (C-5-2019)
GTIN	4017918130923
Weight per piece (including packing)	5.42 g
Weight per piece (excluding packing)	5.42 g
Customs tariff number	85364190
Country of origin	HU

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Technical data

Product properties

Product type	Single solid-state relay
Operating mode	100% operating factor

Insulation characteristics

Insulation	Basic insulation
------------	------------------

Insulation characteristics: Standards/regulations

Insulation	Basic insulation
Overvoltage category	III
Pollution degree	2

Electrical properties

Maximum power dissipation for nominal condition	0.18 W
Test voltage (Input/output)	2.5 kV (50 Hz, 1 min., input/output)

Input data

Nominal input voltage U_N	60 V DC
Input voltage range in reference to U_N	0.8 ... 1.2
Input voltage range	48 V DC ... 72 V DC
Switching threshold "0" signal, voltage	≤ 20 V
Switching threshold "1" signal voltage	≥ 35 V
Typical input current at U_N	3 mA
Typical response time	40 μ s (at U_N)
Typical turn-off time	500 μ s (at U_N)
Transmission frequency	300 Hz

Output data

Contact switching type	1 N/O contact
Design of digital output	electronic
Output voltage range	3 V DC ... 33 V DC
Limiting continuous current	3 A (see derating curve)
Maximum inrush current	15 A (10 ms)
Voltage drop at max. limiting continuous current	≤ 150 mV
Output circuit	2-conductor, floating
Protective circuit	Reverse polarity protection; Polarity protection diode Surge protection


Dimensions

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Dimensional drawing		
Width		5 mm
Height		28 mm
Depth		15 mm

Material specifications

Color	black (RAL 9005)
-------	------------------

Environmental and real-life conditions

Ambient conditions	
Degree of protection	RT III
Ambient temperature (operation)	-25 °C ... 60 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C

Approvals

Corrosive gas test	
Identification	ISA-S71.04. G3 Harsh Group
	EN 60068-2-60

Standards and regulations


Standards/regulations	
Standards/regulations	IEC 60664
	EN 50178

Mounting


Assembly instructions	in rows with zero spacing
Mounting position	any

Drawings

Diagram

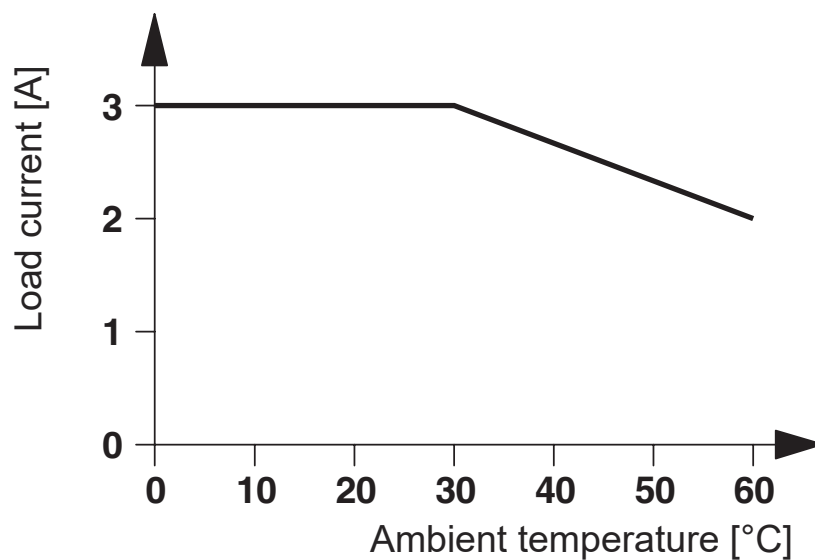


Circuit diagram

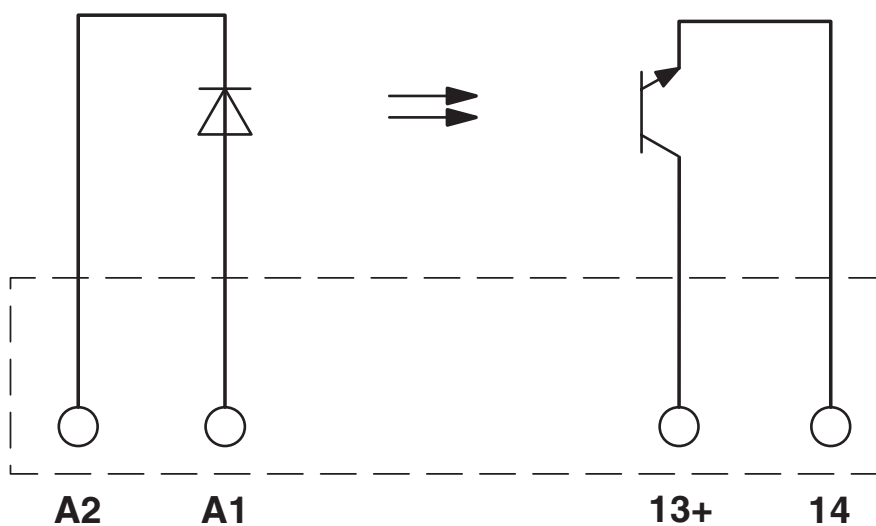


OPT-60DC/ 24DC/ 2 - Miniature solid-state relay

2966605

<https://www.phoenixcontact.com/ca/products/2966605>

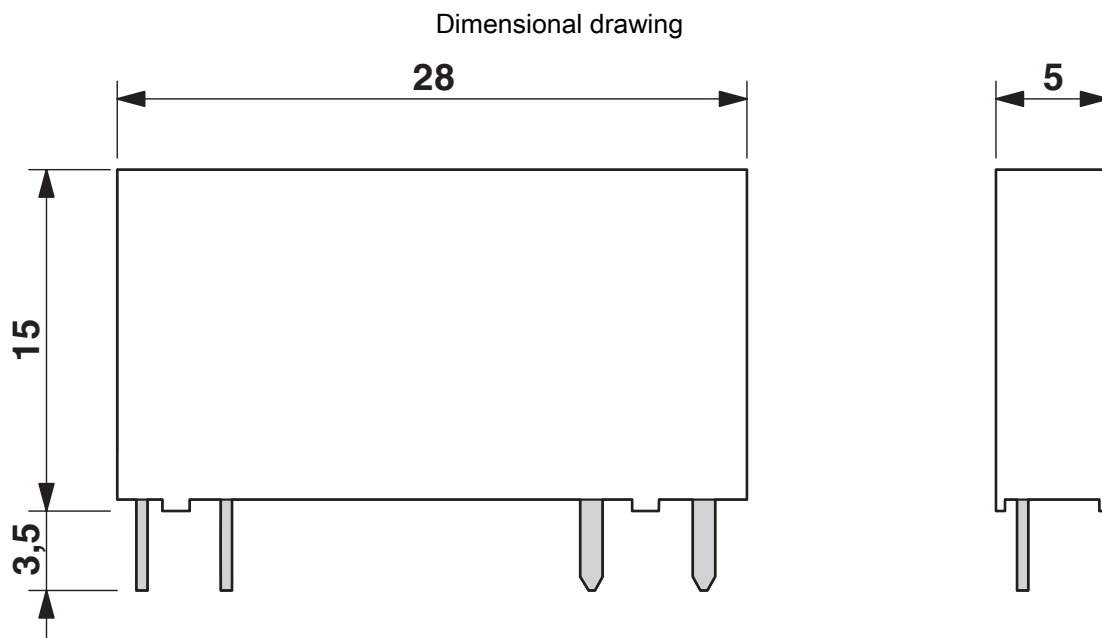

Drilling plan/solder pad geometry

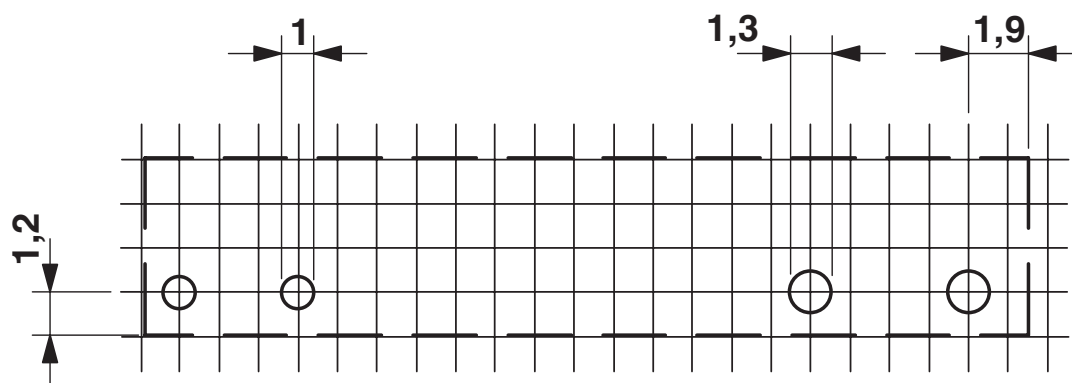

a = pitch division 1.25 mm and 1.27 mm

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/ca/products/2966605>



cUL Recognized
Approval ID: FILE E 195083



UL Recognized
Approval ID: FILE E 195083



EAC
Approval ID: TR_TS_D_00573_c



UL Recognized
Approval ID: FILE E 195083



EAC
Approval ID: RU*C-DE.*08.B.00010



cUL Recognized
Approval ID: FILE E 195083



GL
Approval ID: 46016-03 HH

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Classifications

ECLASS

ECLASS-11.0	27371604
ECLASS-12.0	27371604
ECLASS-13.0	27371604

ETIM

ETIM 9.0	EC001504
----------	----------

UNSPSC

UNSPSC 21.0	39122300
-------------	----------

OPT-60DC/ 24DC/ 2 - Miniature solid-state relay



2966605

<https://www.phoenixcontact.com/ca/products/2966605>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT Ltd
8240 Parkhill Drive
Milton, Ontario L9T 5V7
1-800-890-2820
cdinfo@phoenixcontact.ca