

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208
<https://www.phoenixcontact.com/in/products/2981208>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop and safety door monitoring up to SIL 3 or Cat. 4, PL e in accordance with EN ISO 13849, automatic or manual activation, 3 N/O contacts, 1 N/C contact, 2 N/O contacts with a fixed dropout delay of 2.5 s, plug-in screw connection terminal blocks

Your advantages

- For emergency stop and safety door monitoring, plus evaluation of light grids
- Fixed delay times of 2.5 s

Commercial data

| | |
|--------------------------------------|--------------------------------|
| Item number | 2981208 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Note | Made to order (non-returnable) |
| Sales key | DNA |
| Product key | DNA132 |
| Catalog page | Page 25 (IF-2009) |
| GTIN | 4017918956677 |
| Weight per piece (including packing) | 450 g |
| Weight per piece (excluding packing) | 450 g |
| Customs tariff number | 85371098 |
| Country of origin | DE |

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208

<https://www.phoenixcontact.com/in/products/2981208>

Technical data

Notes

Utilization restriction

| | |
|----------|---|
| EMC note | EMC: class A product, see manufacturer's declaration in the download area |
|----------|---|

Product properties

| | |
|-------------------------|--|
| Product type | Safety relays |
| Application | Emergency stop |
| | Safety door |
| | Light grid |
| Mechanical service life | 10x 10 ⁶ cycles |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

Electrical properties

| | |
|---|-----------------------|
| Maximum power dissipation for nominal condition | 3.6 W |
| Nominal operating mode | 100% operating factor |

Air clearances and creepage distances between the power circuits

| | |
|--------------------------------|---|
| Rated insulation voltage | 250 V AC |
| Rated surge voltage/insulation | Basic insulation 4 kV: between all current paths and housing Safe isolation, reinforced insulation 6 kV: between 13/14, 23/24, 33/34, and the remaining current paths between 13/14, 23/24, 33/34 among one another |

Input data

General

| | |
|---|----------------------------------|
| Rated control circuit supply voltage U_S | 24 V DC -15 % / +10 % |
| Power consumption at U_S | typ. 3.6 W |
| Rated control supply current I_S | typ. 150 mA |
| Inrush current | 200 mA (at U_S) |
| | < 40 mA (with U_S/I_x to S10) |
| | < 150 mA (with U_S/I_x to S12) |
| | > -60 mA (with U_S/I_x to S22) |
| | < 40 mA (with U_S/I_x to S34) |
| | < 40 mA (with U_S/I_x to S35) |
| Current consumption | < 40 mA (with U_S/I_x to S10) |
| | < 40 mA (with U_S/I_x to S12) |
| | > -40 mA (with U_S/I_x to S22) |
| | 0 mA (with U_S/I_x to S34) |
| | < 5 mA (with U_S/I_x to S35) |
| Voltage at input/start and feedback circuit | 24 V DC -15 % / +10 % |

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208

<https://www.phoenixcontact.com/in/products/2981208>

| | |
|---|--|
| Filter time | 1 ms (at A1 in the event of voltage dips at U_s) |
| | max. 1.5 ms (at S10, S12; test pulse width) |
| | 7.5 ms (at S10, S12; test pulse rate) |
| | Test pulse rate = 5 x Test pulse width |
| Typical response time | < 600 ms (automatic start) |
| | < 70 ms (manual start) |
| Typ. starting time with U_s | < 600 ms (when controlled via A1) |
| Typical release time | < 20 ms (when controlled via S11/S12 and S21/S22) |
| | < 20 ms (when controlled via A1) |
| Concurrence | ∞ |
| Recovery time | < 1 s |
| Delay time | K3(t), K4(t) fixed depending on model |
| Maximum switching frequency | 0.5 Hz |
| Protective circuit | Surge protection; Suppressor diode |
| Max. permissible overall conductor resistance | approx. 11 Ω (Input and start circuits at U_s) |
| Operating voltage display | 1 x green LED |
| Status display | 4 x green LEDs |

Output data

| | |
|--|--|
| Contact switching type | 5 enabling current paths |
| | 1 signaling current path |
| Contact material | AgSnO ₂ |
| Maximum switching voltage | 250 V AC/DC (Observe the load curve) |
| Minimum switching voltage | 5 V AC/DC |
| Limiting continuous current | 6 A (N/O contact, pay attention to the derating) |
| | 6 A (N/C contact) |
| Maximum inrush current | 20 A ($\Delta t \leq 100$ ms, undelayed contacts) |
| | 8 A (delayed contacts) |
| Inrush current, minimum | 10 mA |
| Sq. Total current | 55 A ² (observe derating) |
| Interrupting rating (ohmic load) max. | 144 W (24 V DC, $\tau = 0$ ms) |
| | 288 W (48 V DC, $\tau = 0$ ms) |
| | 110 W (110 V DC, $\tau = 0$ ms, delayed contacts: 77 W) |
| | 88 W (220 V DC, $\tau = 0$ ms) |
| | 1500 VA (250 V AC, $\tau = 0$ ms, delayed contacts: 2000 VA) |
| Maximum interrupting rating (inductive load) | 42 W (24 V DC, $\tau = 40$ ms, delayed contacts: 48 W) |
| | 42 W (48 V DC, $\tau = 40$ ms, delayed contacts: 40 W) |
| | 42 W (110 V DC, $\tau = 40$ ms, delayed contacts: 35 W) |
| | 42 W (220 V DC, $\tau = 40$ ms, delayed contacts: 33 W) |
| Switching capacity min. | 50 mW |
| Switching capacity (360/h cycles) | 4 A (24 V DC) |
| | 4 A (230 V AC) |
| Switching capacity (3600/h cycles) | 2.5 A (24 V (DC13)) |
| | 3 A (230 V (AC15)) |

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208

<https://www.phoenixcontact.com/in/products/2981208>

| | |
|-------------|--------------------------|
| Output fuse | 10 A gL/gG (N/O contact) |
| | 6 A gL/gG (N/C contact) |

Connection data

| | |
|-----------------------|-----|
| Connection technology | |
| pluggable | yes |

| | |
|-----------------------------------|---------------------|
| Conductor connection | |
| Connection method | Screw connection |
| Conductor cross section, rigid | 0.2 mm² ... 2.5 mm² |
| Conductor cross section, flexible | 0.2 mm² ... 2.5 mm² |
| Conductor cross section AWG | 24 ... 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Dimensions

| | |
|--------|----------|
| Width | 45 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Material specifications

| | |
|------------------|--------|
| Color | yellow |
| Housing material | PBT |

Characteristics

| | |
|---------------|---|
| Safety data | |
| Stop category | 0 |
| | 1 |

| | |
|---------------------------|-------------------------------|
| Safety data: EN ISO 13849 | |
| Category | 4 (Undelayed contacts) |
| | 3 (delayed contacts) |
| Performance level (PL) | e (for delayed contacts PL d) |

| | |
|--------------------------------------|--------------------------------|
| Safety data: IEC 61508 - High demand | |
| Safety Integrity Level (SIL) | 3 (for delayed contacts SIL 2) |

| | |
|-------------------------------------|--------------------------------|
| Safety data: IEC 61508 - Low demand | |
| Safety Integrity Level (SIL) | 3 (for delayed contacts SIL 2) |

| | |
|------------------------------|--------------------------------|
| Safety data: EN IEC 62061 | |
| Safety Integrity Level (SIL) | 3 (for delayed contacts SIL 2) |

Environmental and real-life conditions

| | |
|--------------------|--|
| Ambient conditions | |
|--------------------|--|

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208

<https://www.phoenixcontact.com/in/products/2981208>

| | |
|--|---|
| Degree of protection | IP54 |
| | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -20 °C ... 55 °C (observe derating) |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Maximum altitude | ≤ 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |
| Shock | 15g |
| Vibration (operation) | 10 Hz ... 150 Hz, 2g |

Approvals

CE

| | |
|-------------|--------------|
| Certificate | CE-compliant |
|-------------|--------------|

Standards and regulations

Air clearances and creepage distances between the power circuits


| | |
|-----------------------|-----------------------|
| Standards/regulations | DIN EN 50178/VDE 0160 |
|-----------------------|-----------------------|

Mounting

| | |
|-------------------|-------------------|
| Mounting type | DIN rail mounting |
| Mounting position | any |

Drawings

Circuit diagram

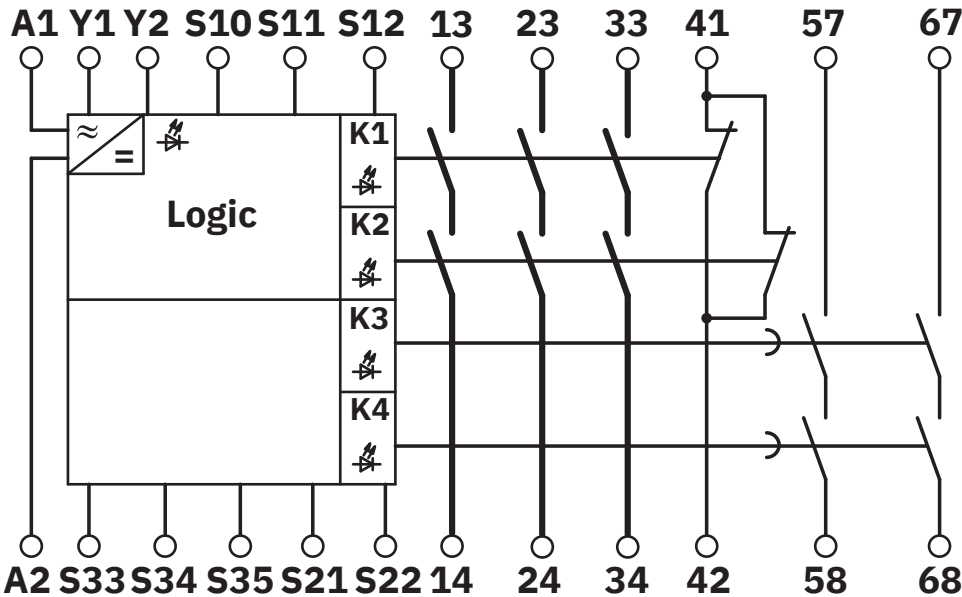

PSR-SCP- 24DC/ESD/5X1/1X2/2T 5 - Safety relays



2981208

<https://www.phoenixcontact.com/in/products/2981208>

Environmental product compliance

| | |
|------------|--|
| China RoHS | Environmentally Friendly Use Period = 50 years |
| | For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads" |

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in