SIEMENS

Data sheet 3ND2132



LV HRC fuse element, NH1, In: 125 A, aM, Un AC: 690 V, Un DC: 400 V, Front indicator, live grip lugs

U ^r				
Model				
product brand name		SENTRON		
product designation		LV HRC fuse link		
design of the product		With blade contacts		
design of an identification indicator		Front indicators		
design of the switching contact		Non-corroding, silver-plated		
design of the fuse link		LV HRC fuse link		
General technical data				
size of fuse system according to EN 60269-1		NH1		
operating class of the fuse link		aM		
mounting type		non-insulated grip lugs		
type of voltage of the operating voltage		AC		
supply voltage				
at AC rated value		690 V		
Protection class				
protection class IP		IP20, with connected conductors		
Switching capacity				
switching capacity current				
 according to IEC 60947-2 rated value 		120 kA		
Dissipation				
power loss [W]		8.1 W		
power loss [W] for rated value of the current at AC in hot operating state per pole		8.1 W		
Mechanical Design				
width of the enclosure		47.2 mm		
mounting position		Any, preferably vertical		
net weight		432 g		
Environmental conditions				
ambient temperature during operation				
• minimum		-5 °C		
maximum		40 °C		
environmental category		-20 to +50 at 95% relative humidity		
environmental category during storage		90% at 20°C		
Certificates				
reference code according to IEC 81346-2		FC		
General Product Approval	Declaration of	Conformity	Test Certificates	







Test Certificates	other

<u>Miscellaneous</u> <u>Miscellaneous</u> <u>Confirmation</u>

Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3ND2132

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3ND2132

Tittps://outport.industry.sichions.com/co/ww/cn/ps/ortb2102

 $Image\ database\ (product\ images,\ 2D\ dimension\ drawings,\ 3D\ models,\ device\ circuit\ diagrams,\ ...)$


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3ND2132


CAx-Online-Generator

http://www.siemens.com/cax

Tender specifications

http://www.siemens.com/specifications

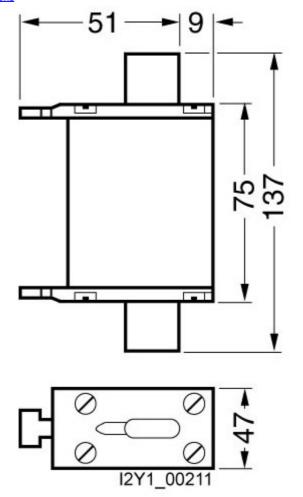

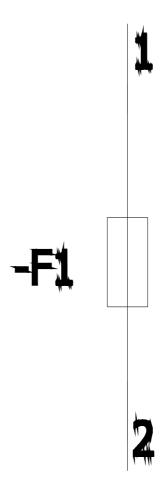

last modified: 2/14/2023 🖸