



Solid-state contactor 1-phase 3RF2 AC 51 / 50 A / 40 °C 24-230 V / 110-230 V AC screw terminal

<b>product brand name</b>	SIRIUS
<b>product designation</b>	solid-state contactor
<b>design of the product</b>	single-phase
<b>product type designation</b>	3RF23
<b>manufacturer's article number</b>	
<ul style="list-style-type: none"><li>• _1 of the accessories that can be ordered</li><li>• _4 of the accessories that can be ordered</li></ul>	<a href="#">3RF2900-3PA88</a> <a href="#">3RF2950-0GA33</a>
<b>product designation</b>	
<ul style="list-style-type: none"><li>• _1 of the accessories that can be ordered</li><li>• _4 of the accessories that can be ordered</li></ul>	terminal cover load monitoring
















General technical data

<b>product function</b>	zero-point switching
<b>power loss [W] for rated value of the current</b>	
<ul style="list-style-type: none"><li>• at AC in hot operating state</li><li>• at AC in hot operating state per pole</li><li>• without load current share typical</li></ul>	54 W 54 W 3.5 W
<b>insulation voltage rated value</b>	600 V
<b>degree of pollution</b>	3
type of voltage of the control supply voltage	AC
surge voltage resistance of main circuit rated value	6 kV
<b>shock resistance according to IEC 60068-2-27</b>	15g / 11 ms
<b>vibration resistance according to IEC 60068-2-6</b>	2g
<b>reference code according to IEC 81346-2</b>	Q
<b>Substance Prohibitance (Date)</b>	07/01/2006

Main circuit

<b>number of poles for main current circuit</b>	1
<b>number of NO contacts for main contacts</b>	1
<b>number of NC contacts for main contacts</b>	0
<b>operating voltage at AC</b>	
<ul style="list-style-type: none"><li>• at 50 Hz rated value</li><li>• at 60 Hz rated value</li></ul>	24 ... 230 V 24 ... 230 V
<b>operating frequency rated value</b>	50 ... 60 Hz
<b>operating range relative to the operating voltage at AC</b>	
<ul style="list-style-type: none"><li>• at 50 Hz</li><li>• at 60 Hz</li></ul>	20 ... 253 V 20 ... 253 V
<b>operational current</b>	
<ul style="list-style-type: none"><li>• at AC-51 rated value</li><li>• at AC-51 according to IEC 60947-4-3</li><li>• according to UL 508 rated value</li></ul>	50 A 36 A 45 A
<b>operational current minimum</b>	500 mA
<b>rate of voltage rise at the thyristor for main contacts</b>	1 000 V/μs
<b>maximum permissible</b>	

<b>blocking voltage at the thyristor for main contacts</b>	800 V
<b>maximum permissible reverse current of the thyristor</b>	10 mA
<b>derating temperature</b>	40 °C
<b>surge current resistance rated value</b>	1 150 A
<b>I<sup>2</sup>t value maximum</b>	6 600 A <sup>2</sup> ·s
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC
<b>control supply voltage 1 at AC</b>	
• at 50 Hz	110 ... 230 V
• at 60 Hz	110 ... 230 V
<b>control supply voltage frequency</b>	
• 1 rated value	50 Hz
• 2 rated value	60 Hz
<b>control supply voltage at AC</b>	
• at 50 Hz full-scale value for signal<0> recognition	40 V
• at 60 Hz full-scale value for signal<0> recognition	40 V
<b>control supply voltage</b>	
• at AC initial value for signal <1> detection	90 V
<b>symmetrical line frequency tolerance</b>	5 Hz
<b>control current at minimum control supply voltage</b>	
• at AC	2 mA
<b>control current at AC rated value</b>	15 mA
<b>ON-delay time</b>	40 ms; additionally max. one half-wave
<b>OFF-delay time</b>	40 ms; additionally max. one half-wave
<b>Auxiliary circuit</b>	
<b>number of NC contacts for auxiliary contacts</b>	0
<b>number of NO contacts for auxiliary contacts</b>	0
<b>number of CO contacts for auxiliary contacts</b>	0
<b>Installation/ mounting/ dimensions</b>	
<b>fastening method</b>	screw fixing and snap-on mounting on standard mounting rail 35 mm according to IEC 60715
• side-by-side mounting	Yes
<b>design of the thread of the screw for securing the equipment</b>	M4
<b>height</b>	100 mm
<b>width</b>	67 mm
<b>depth</b>	141 mm
<b>Connections/ Terminals</b>	
<b>type of electrical connection</b>	
• for main current circuit	screw-type terminals
• for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	2x (1.5 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
— finely stranded with core end processing	2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
• at AWG cables for main contacts	2x (14 ... 10)
<b>connectable conductor cross-section for main contacts</b>	
• solid or stranded	1.5 ... 6 mm <sup>2</sup>
• finely stranded with core end processing	1 ... 10 mm <sup>2</sup>
<b>type of connectable conductor cross-sections</b>	
• for auxiliary and control contacts	
— solid	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded with core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
— finely stranded without core end processing	1x (0.5 ... 2.5 mm <sup>2</sup> ), 2x (0.5 ... 1.0 mm <sup>2</sup> )
• at AWG cables for auxiliary and control contacts	1x (AWG 20 ... 12)
<b>AWG number as coded connectable conductor cross section for main contacts</b>	10 ... 14
<b>tightening torque</b>	
• for main contacts with screw-type terminals	2 ... 2.5 N·m
• for auxiliary and control contacts with screw-type terminals	0.5 ... 0.6 N·m
<b>tightening torque [lbf·in]</b>	

<ul style="list-style-type: none"><li>• for main contacts with screw-type terminals</li><li>• for auxiliary and control contacts with screw-type terminals</li></ul>	18 ... 22 lbf·in 4.5 ... 5.3 lbf·in				
<b>design of the thread of the connection screw</b>					
<ul style="list-style-type: none"><li>• for main contacts</li><li>• of the auxiliary and control contacts</li></ul>	M4 M3				
<b>stripped length of the cable</b>					
<ul style="list-style-type: none"><li>• for main contacts</li><li>• for auxiliary and control contacts</li></ul>	7 mm 7 mm				
<b>Safety related data</b>					
<b>protection class IP on the front according to IEC 60529</b>	IP20				
<b>touch protection on the front according to IEC 60529</b>	finger-safe, for vertical contact from the front				
<b>Ambient conditions</b>					
installation altitude at height above sea level maximum	1 000 m				
<b>ambient temperature</b>					
<ul style="list-style-type: none"><li>• during operation</li><li>• during storage</li></ul>	-25 ... +60 °C -55 ... +80 °C				
<b>Electromagnetic compatibility</b>					
<b>conducted interference</b>					
<ul style="list-style-type: none"><li>• due to burst according to IEC 61000-4-4</li><li>• due to conductor-earth surge according to IEC 61000-4-5</li><li>• due to conductor-conductor surge according to IEC 61000-4-5</li><li>• due to high-frequency radiation according to IEC 61000-4-6</li></ul>	2 kV / 5 kHz behavior criterion 2 2 kV behavior criterion 2  1 kV behavior criterion 2  140 dBuV in the frequency range 0.15 ... 80 MHz, behavior criterion 1				
<b>field-based interference according to IEC 61000-4-3</b>	80 MHz ... 1 GHz 10 V/m, behavior criterion 1				
<b>electrostatic discharge according to IEC 61000-4-2</b>	4 kV contact discharging / 8 kV air discharging, behavior criterion 2				
<b>conducted HF interference emissions according to CISPR11</b>	Class A for industrial environment				
<b>field-bound HF interference emission according to CISPR11</b>	Class B for the domestic, business and commercial environments				
<b>Short-circuit protection, design of the fuse link</b>					
manufacturer's article number					
<ul style="list-style-type: none"><li>• of gS fuse for semiconductor protection at NH design usable</li><li>• of full range R fuse link for semiconductor protection at cylindrical design usable</li><li>• of back-up R fuse link for semiconductor protection at NH design usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable</li><li>• of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable</li></ul>	<a href="#">3NE1817-0</a> <a href="#">5SE1363</a> <a href="#">3NE1817-0</a> <a href="#">3NC1450</a> <a href="#">3NC2200</a>				
manufacturer's article number of the gG fuse					
<ul style="list-style-type: none"><li>• at cylindrical design 22 x 58 mm usable</li></ul>	<a href="#">3NW6217-1</a> ; These fuses have a smaller rated current than the semiconductor relays				
manufacturer's article number					
<ul style="list-style-type: none"><li>• of NEOZED fuse usable</li></ul>	<a href="#">5SE2335</a> ; These fuses have a smaller rated current than the semiconductor relays				
<b>Certificates/ approvals</b>					
<table><tr><td>General Product Approval</td><td>EMC</td><td>Declaration of Conformity</td></tr><tr><td><div> CSA</div><div><a href="#">Confirmation</a></div><div> UL</div><div></div><div> RCM</div><div> EG-Konf.</div></td></tr></table>		General Product Approval	EMC	Declaration of Conformity	<div> CSA</div> <div><a href="#">Confirmation</a></div> <div> UL</div> <div></div> <div> RCM</div> <div> EG-Konf.</div>
General Product Approval	EMC	Declaration of Conformity			
<div> CSA</div> <div><a href="#">Confirmation</a></div> <div> UL</div> <div></div> <div> RCM</div> <div> EG-Konf.</div>					
Declaration of Conformity	Test Certificates	other	Railway		

#### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2350-1AA22>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2350-1AA22>




Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RF2350-1AA22>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RF2350-1AA22&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2350-1AA22&lang=en)

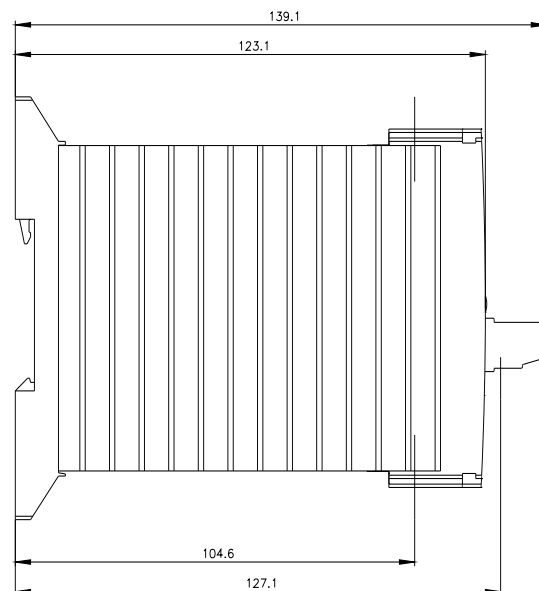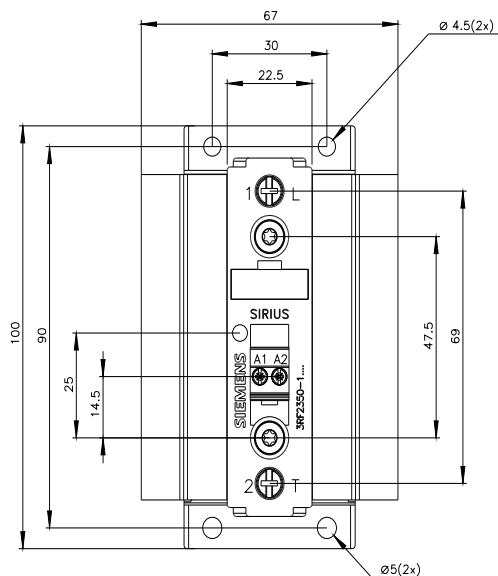

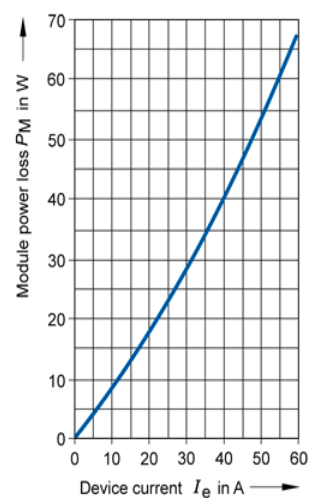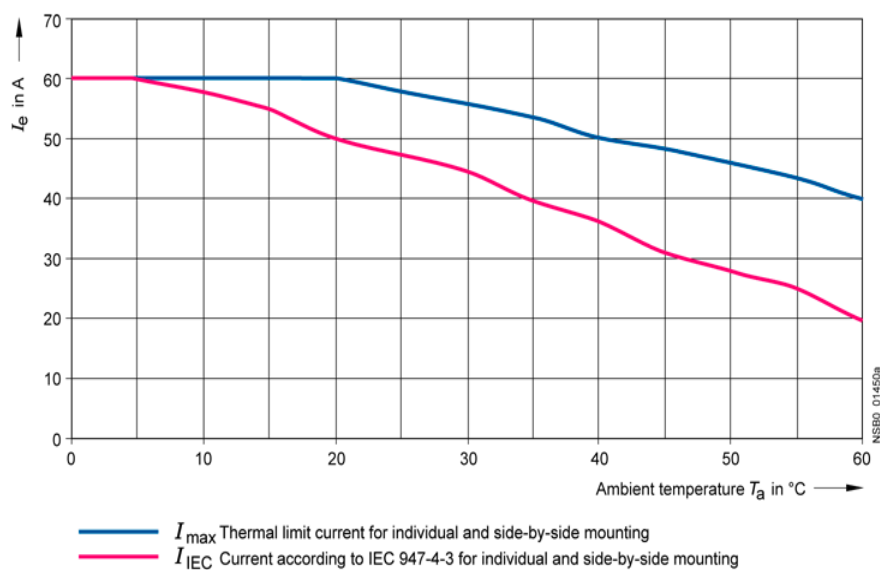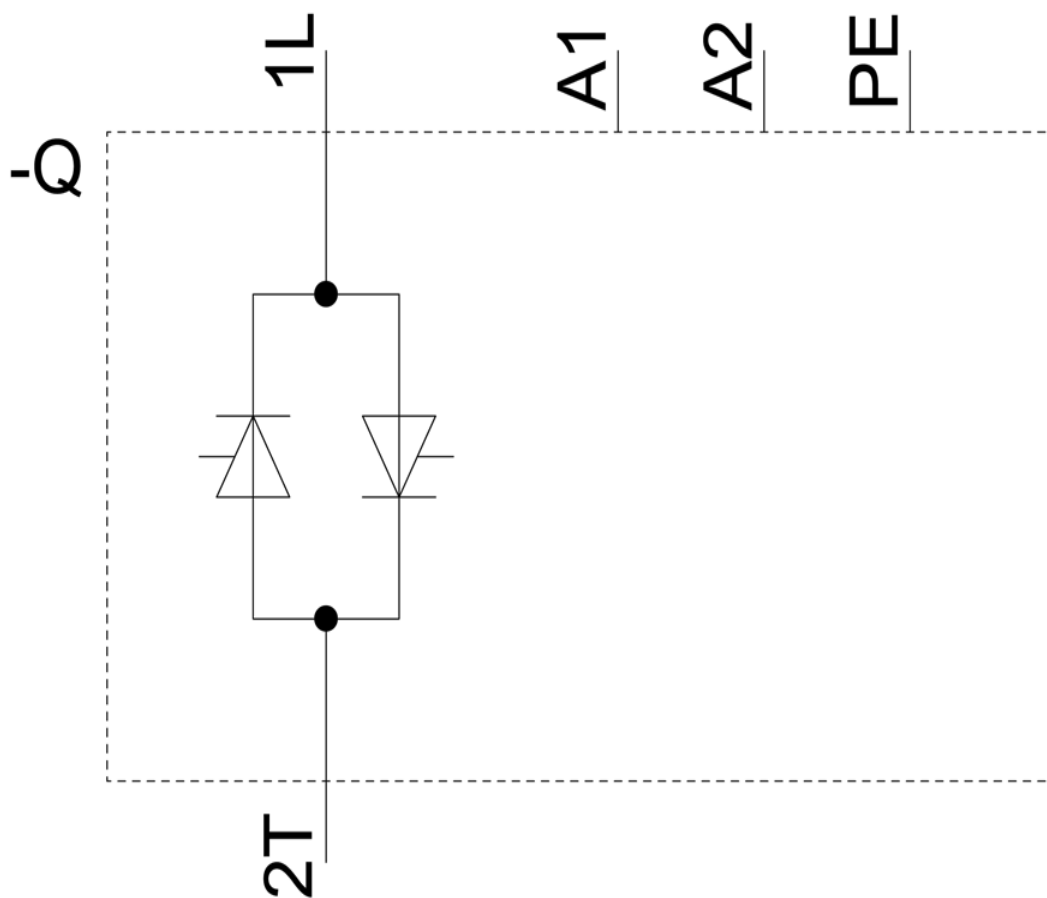

last modified:

1/26/2022