



Circuit breaker size S3 For starter combination Rated current 100 A Short-circuit release 1235 A Screw terminal Standard switching capacity !!!
Phased-out product !!! Successor is SIRIUS 3RV2 Preferred successor type is >>3RV2341-4MC10<<

product brand name	SIRIUS
product designation	circuit breaker
design of the product	for starter combinations

General technical data

product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
• at AC in hot operating state	44 W
• at AC in hot operating state per pole	14.7 W
surge voltage resistance rated value	6 000 V
protection class IP on the front	IP20
shock resistance	25g / 11 ms
mechanical service life (operating cycles) of the main contacts typical	50 000
continuous current rated value	100 A
Substance Prohibitance (Date)	07/01/2006

Ambient conditions

installation altitude at height above sea level maximum	2 000 m
ambient temperature	
• during operation	-20 ... +60 °C
• during storage	-50 ... +80 °C
• during transport	-50 ... +80 °C

Main circuit











number of poles for main current circuit	3
operating voltage	
• rated value	690 V
• at AC-3 rated value maximum	690 V
operational current at AC-3 at 400 V rated value	100 A
operating power at AC-3	
• at 400 V rated value	45 kW
operating frequency at AC-3 maximum	15 1/h

Auxiliary circuit

number of CO contacts for auxiliary contacts	0
--	---

Protective and monitoring functions

product function	
• ground fault detection	No
• phase failure detection	No
maximum short-circuit current breaking capacity (Icu)	
• at AC at 240 V rated value	100 kA
• at AC at 400 V rated value	50 kA
• at AC at 500 V rated value	8 kA
• at AC at 690 V rated value	5 kA

Short-circuit protection		
design of the overcurrent release and short-circuit release	magnetic	
Installation/ mounting/ dimensions		
mounting position	any	
fastening method	screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 50022	
height	165 mm	
width	70 mm	
depth	174 mm	
required spacing with side-by-side mounting		
• backwards	0 mm	
• at the side	0 mm	
Connections/ Terminals		
product component removable terminal for auxiliary and control circuit	No	
type of electrical connection		
• for main current circuit	screw-type terminals with box terminals	
• for auxiliary and control circuit	screw-type terminals	
arrangement of electrical connectors for main current circuit	front side	
type of connectable conductor cross-sections		
• for main contacts		
— solid	2x (2.5 ... 16 mm²)	
— stranded	2x (10 ... 50 mm²), 1x (10 ... 70 mm²)	
— finely stranded with core end processing	2x (2.5 ... 35 mm²), 2.5 ... 50 mm²	
• at AWG cables for main contacts	2x (10 ... 1), 1x (10 ... 2)	
Safety related data		
touch protection against electrical shock	finger-safe	
Certificates/ approvals		
General Product Approval		
Declaration of Conformity		
<div><div> CSA</div><div>Confirmation</div><div> CCC</div><div> UL</div><div></div><div> EG-Konf.</div></div>		
Declaration of Conformity	Test Certificates	Marine / Shipping
	Type Test Certificates/Test Report	Special Test Certificate
		<div> ABS</div> <div> RINA</div> <div> DNV GL</div>
other	Railway	
Miscellaneous	Confirmation	Special Test Certificate
	 VDE	
Further information		
Information- and Downloadcenter (Catalogs, Brochures,...) https://www.siemens.com/ic10		
Industry Mall (Online ordering system) https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV1341-4MC10		
Cax online generator http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV1341-4MC10		

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1341-4MC10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV1341-4MC10&lang=en


Characteristic: Tripping characteristics, I^2t , Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3RV1341-4MC10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV1341-4MC10&objecttype=14&gridview=view1>

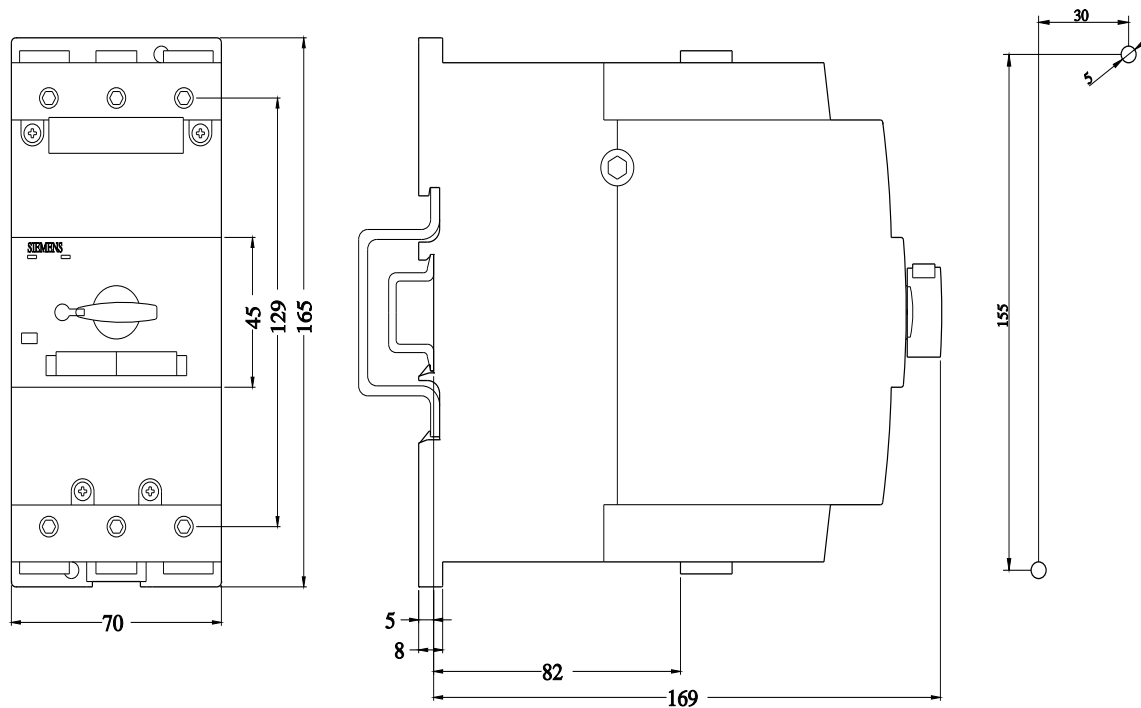

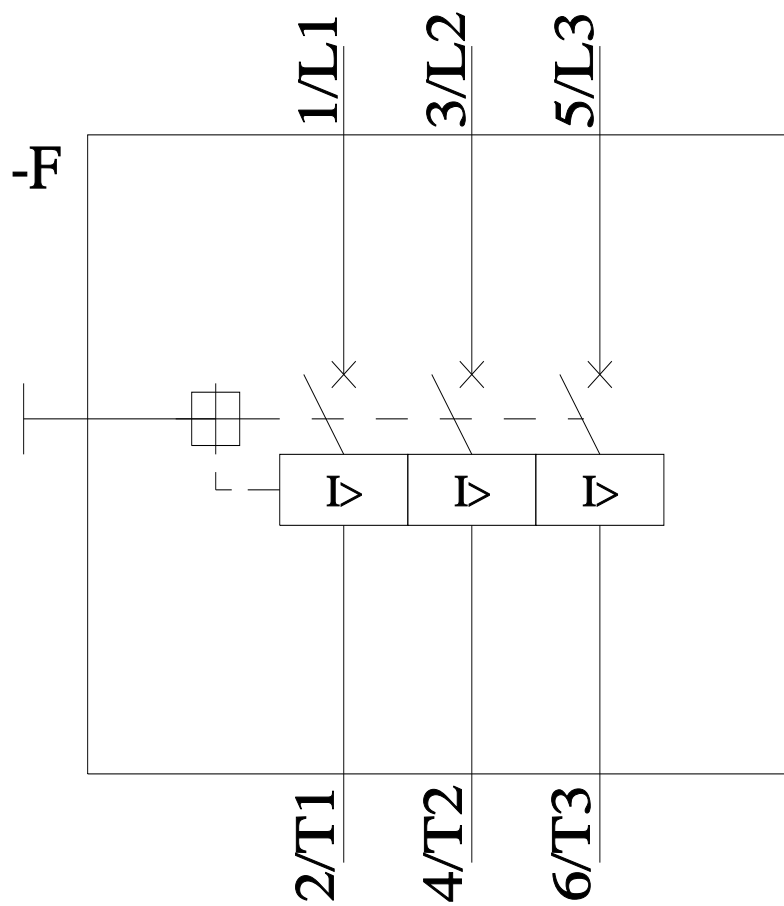

last modified:

11/21/2022 [↗](#)