



SIRIUS soft starter Values at 500 V, 40 °C standard: 203 A, 132 kW Inside-delta: 352 A, 250 kW 400-600 V AC, 230 V AC Screw terminals !!! Phased-out product !!! Successor is SIRIUS 3RW5, Preferred successor type is >>3RW5543-6HA16<<

General technical data

product brand name		SIRIUS
product feature		
• integrated bypass contact system		Yes
• thyristors		Yes
product function		
• intrinsic device protection		Yes
• motor overload protection		Yes
• evaluation of thermistor motor protection		Yes
• external reset		Yes
• adjustable current limitation		Yes
• inside-delta circuit		Yes
product component motor brake output		Yes
insulation voltage rated value	V	690
degree of pollution		3, acc. to IEC 60947-4-2
reference code according to EN 61346-2		Q
reference code according to DIN 40719 extended according to IEC 204-2 according to IEC 750		G

Power Electronics

product designation		Soft starter
operational current		
• at 40 °C rated value	A	203
• at 50 °C rated value	A	180
• at 60 °C rated value	A	156
operational current for 3-phase motors at inside-delta circuit		
• at 40 °C rated value	A	352
• at 50 °C rated value	A	312
• at 60 °C rated value	A	270
yielded mechanical performance for 3-phase motors		
• at 400 V		
— at standard circuit at 40 °C rated value	kW	110
— at inside-delta circuit at 40 °C rated value	kW	200
• at 500 V		
— at standard circuit at 40 °C rated value	kW	132
— at inside-delta circuit at 40 °C rated value	kW	250
operating frequency rated value	Hz	50 ... 60
relative negative tolerance of the operating frequency	%	-10
relative positive tolerance of the operating frequency	%	10
operating voltage at standard circuit rated value	V	400 ... 600
relative negative tolerance of the operating voltage at standard circuit	%	-15

relative positive tolerance of the operating voltage at standard circuit	%	10
operating voltage at inside-delta circuit rated value	V	400 ... 600
relative negative tolerance of the operating voltage at inside-delta circuit	%	-15
relative positive tolerance of the operating voltage at inside-delta circuit	%	10
minimum load [%]	%	8
adjustable motor current for motor overload protection minimum rated value	A	40
continuous operating current [% of I _e] at 40 °C	%	115
power loss [W] at operational current at 40 °C during operation typical	W	89

Control circuit/ Control

type of voltage of the control supply voltage		AC
control supply voltage frequency 1 rated value	Hz	50
control supply voltage frequency 2 rated value	Hz	60
relative negative tolerance of the control supply voltage frequency	%	-10
relative positive tolerance of the control supply voltage frequency	%	10
control supply voltage 1 at AC		
• at 50 Hz rated value	V	230
• at 60 Hz rated value	V	230
relative negative tolerance of the control supply voltage at AC at 50 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 50 Hz	%	10
relative negative tolerance of the control supply voltage at AC at 60 Hz	%	-15
relative positive tolerance of the control supply voltage at AC at 60 Hz	%	10
display version for fault signal		Display

Mechanical data

width	mm	210
height	mm	230
depth	mm	298
fastening method		screw fixing
mounting position		with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
required spacing with side-by-side mounting		
• upwards	mm	100
• at the side	mm	5
• downwards	mm	75
wire length maximum	m	500
number of poles for main current circuit		3

Connections/ Terminals

type of electrical connection		
• for main current circuit		busbar connection
• for auxiliary and control circuit		screw-type terminals
number of NC contacts for auxiliary contacts		0
number of NO contacts for auxiliary contacts		3
number of CO contacts for auxiliary contacts		1
type of connectable conductor cross-sections for main contacts for box terminal using the front clamping point		
• finely stranded with core end processing		70 ... 240 mm ²
• finely stranded without core end processing		70 ... 240 mm ²
• stranded		95 ... 300 mm ²
type of connectable conductor cross-sections for main contacts for box terminal using the back clamping point		
• finely stranded with core end processing		120 ... 185 mm ²
• finely stranded without core end processing		120 ... 185 mm ²
• stranded		120 ... 240 mm ²

type of connectable conductor cross-sections for main contacts for box terminal using both clamping points

- finely stranded with core end processing
- finely stranded without core end processing
- stranded

type of connectable conductor cross-sections at AWG cables for main contacts for box terminal

- using the back clamping point
- using the front clamping point
- using both clamping points

type of connectable conductor cross-sections for DIN cable lug for main contacts

- finely stranded
- stranded

type of connectable conductor cross-sections for auxiliary contacts

- solid
- finely stranded with core end processing

type of connectable conductor cross-sections at AWG cables

- for main contacts
- for auxiliary contacts
- for auxiliary contacts finely stranded with core end processing

min. 2x 50 mm², max. 2x 185 mm²
min. 2x 50 mm², max. 2x 185 mm²
max. 2x 70 mm², max. 2x 240 mm²

250 ... 500 kcmil
3/0 ... 600 kcmil
min. 2x 2/0, max. 2x 500 kcmil

50 ... 240 mm²
70 ... 240 mm²

2x (0.5 ... 2.5 mm²)
2x (0.5 ... 1.5 mm²)

2/0 ... 500 kcmil
2x (20 ... 14)
2x (20 ... 16)

Ambient conditions

installation altitude at height above sea level

m

5 000

environmental category

- during transport according to IEC 60721
- during storage according to IEC 60721
- during operation according to IEC 60721

2K2, 2C1, 2S1, 2M2 (max. fall height 0.3 m)
1K6 (only occasional condensation), 1C2 (no salt mist),
1S2 (sand must not get inside the devices), 1M4
3K6 (no formation of ice, no condensation), 3C3 (no salt
mist), 3S2 (sand must not get into the devices), 3M6

ambient temperature

- during operation
- during storage

°C

60

°C

-25 ... +80

°C

40

derating temperature

protection class IP on the front according to IEC 60529

IP00; IP20 with box terminal/cover

touch protection on the front according to IEC 60529

finger-safe, for vertical contact from the front with box terminal/cover

Certificates/ approvals

General Product Approval

EMC



[Confirmation](#)



Declaration of Conformity

Test Certificates

Marine / Shipping



[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



Marine / Shipping


other



[Confirmation](#)

UL/CSA ratings		
yielded mechanical performance [hp] for 3-phase AC motor		
<ul style="list-style-type: none"> • at 460/480 V <ul style="list-style-type: none"> — at standard circuit at 50 °C rated value — at inside-delta circuit at 50 °C rated value • at 575/600 V <ul style="list-style-type: none"> — at standard circuit at 50 °C rated value — at inside-delta circuit at 50 °C rated value 	hp	125
	hp	250
	hp	150
	hp	300
contact rating of auxiliary contacts according to UL		B300 / R300
Further information		
Simulation Tool for Soft Starters (STS)		
https://support.industry.siemens.com/cs/ww/en/view/101494917		
Information on the packaging		
https://support.industry.siemens.com/cs/ww/en/view/109813875		
Information- and Downloadcenter (Catalogs, Brochures,...)		
https://www.siemens.com/ic10		
Industry Mall (Online ordering system)		
https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RW4443-6BC45		
Cax online generator		
http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RW4443-6BC45		
Service&Support (Manuals, Certificates, Characteristics, FAQs,...)		
https://support.industry.siemens.com/cs/ww/en/ps/3RW4443-6BC45		
Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)		
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RW4443-6BC45&lang=en		

Subject to change without notice
© Copyright Siemens

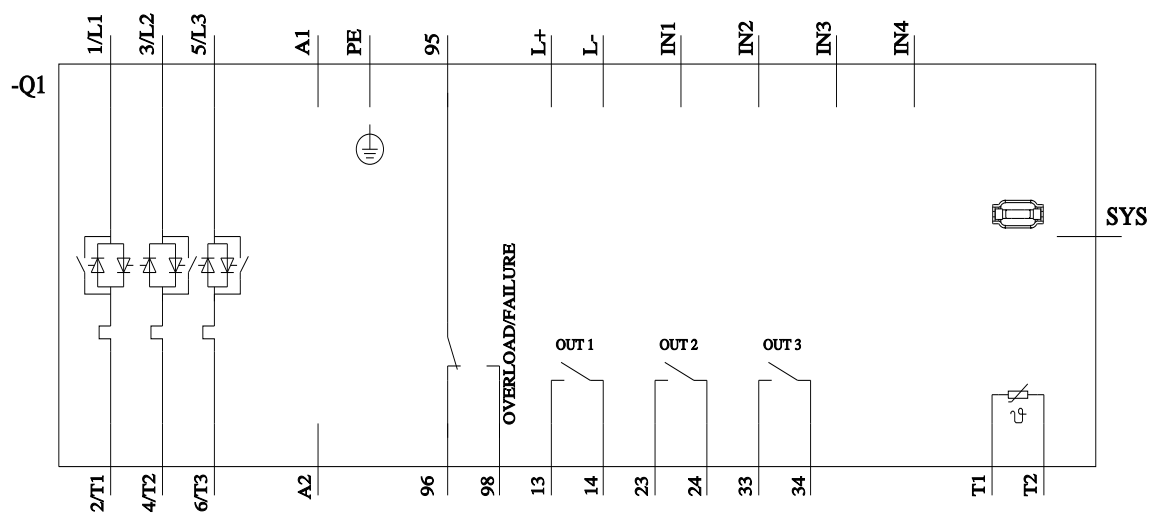

last modified:

1/16/2022 