SIEMENS

Product data sheet

3SB3500-1EA21



22MM METAL ROUND ACTUATOR: PUSH-PULL BUTTON 30MM LATCHING W.PULL-TO-UNLOCK MECH. WITH HOLDER RED

Actuator:

| Actuator: | | |
|---|----|----------------------------------|
| Design of the product | | Single device round |
| Design of the operating mechanism | | Mushroom-shaped push-pull switch |
| External diameter / of the activation element | mm | 30 |
| Functionality / of the actuator | | Latching |
| Type of unlocking device | | pull-to-unlatch mechanism |
| Color / of the activation element | | Red |
| Material / of the activation element | | plastic |
| Number of switching positions | | 2 |
| Product component / front ring | | Yes |
| Material / of the front ring | | metal |
| Color / of the front ring | | silver |
| Design of the front ring | | Standard |
| Product function / EMERGENCY STOP function | | No |
| Holder: | | |

Holder:

Material / of the holder

General technical data:

Resistance against shock

Metal

| for devices without incandescent lamp / according to IEC 60068- 2-27 | | <= 50g |
|---|-----|----------------|
| Resistance against vibration / according to IEC 60068-2-6 | | 20 200 Hz: 5g |
| Operating cycles / maximum | 1/h | 1,000 |
| Mechanical operating cycles as operating time / typical | | 300,000 |
| Product extension / optional / fluorescent materials | _ | No |
| Reference code | _ | |
| according to DIN EN 61346-2 | | S |
| according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 | | S |
| Tightening torque / of the screws in the bracket / maximum | N∙m | 1 |
| Ambient temperature | _ | |
| during operating | °C | -25 +70 |
| during storage | °C | -40 +80 |
| Protection class IP | | IP67 |
| climatic class / during the operating phase / according to EN 60721 | | 3K6 |
| Mounting type | | front mounting |
| Shape / of the installation hole | | round |
| Installation width | mm | 30 |
| Mounting diameter | mm | 22 |
| Mounting height | mm | 27.5 |
| Mounting depth | mm | 29 |
| Certificates/annrovals. | | |

Certificates/ approvals:

| General Product | Approval | | Declaration of Conformity | Test Certificates | | |
|---|------------------|--------------------------------|------------------------------|-----------------------------|--|--|
| (SA) | EHC | | CE EG-Konf. | Special Test Certificate | | |
| Shipping Approv | ral | | | | | |
| ABS | ĴÅ DNV DNV | Lloyd's Register Lrs | PRS | | | |
| other | | | | | | |
| Confirmation | other | Environmental Confirmations | | | | |
| Further information: | | | | | | |
| Information- and Downloadcenter (Catalogs, Brochures,) | | | | | | |

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs


Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall

Cax online generator

http://www.siemens.com/cax

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3SB3500-1EA21/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3500-1EA21

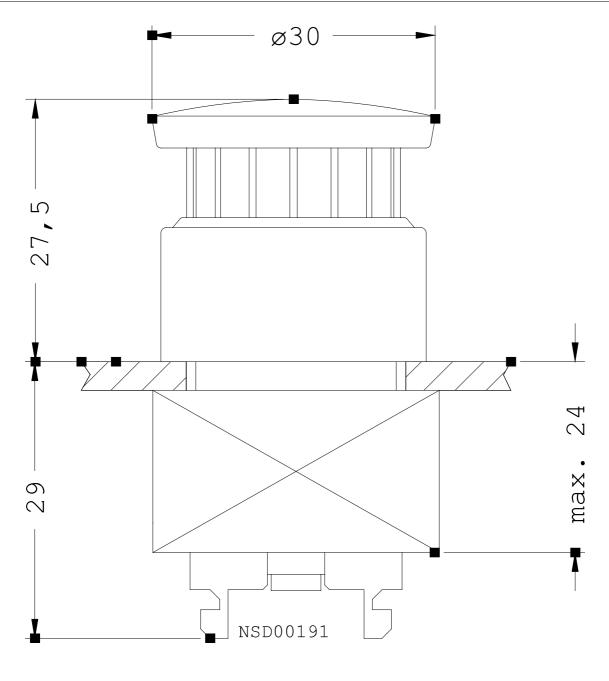

last change:

Jul 7, 2014