



DIAZED FUSE LINK 500V QUICK-RESPONSE ,  
NDZ SERIES SIZE DII,THREAD E16, 2A

Similar to image

| Technical data:                                          |    |                  |
|----------------------------------------------------------|----|------------------|
| Color coding of the fuse link                            |    | pink             |
| Current / for AC / rated value                           | A  | 2                |
| Tripping characteristic class                            |    | quick acting (F) |
| Size of the fallback-system / acc. to DIN EN 60269-1     |    | NDz              |
| Supply voltage                                           |    |                  |
| • for AC / rated value                                   | V  | 500              |
| • for DC                                                 | V  | 500              |
| Switching capacity current                               |    |                  |
| • in accordance with IEC 60947-2 / rated value           | kA | 40               |
| • with DC / in accordance with IEC 60947-2 / rated value | kA | 1.6              |
| Ambient temperature                                      |    |                  |
| • minimum                                                | °C | -5               |
| • maximum                                                | °C | 40               |

| Certificates/approvals:  |                              |
|--------------------------|------------------------------|
| General Product Approval | Test Certificates            |
| <a href="#">ROSTEST</a>  | <a href="#">Manufacturer</a> |

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<http://support.automation.siemens.com/WW/view/en/5SA111/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5SA111](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SA111)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

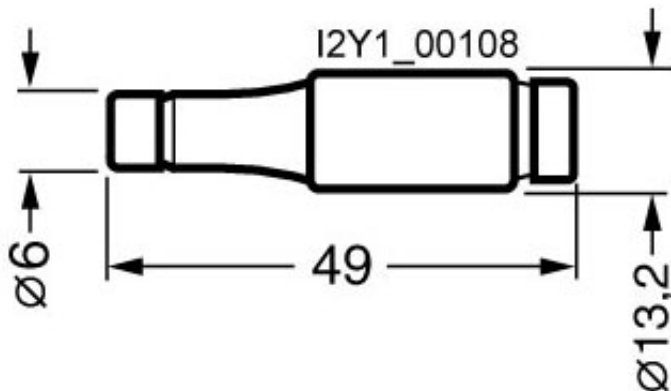

last change:

Aug 26, 2011