



Fault signal contact, 2 NO for miniature circuit breaker 5SL, 5SY, 5SP RCBO 5SU1, FI 5SV (for 5SU1 handle coupler 5ST3805-1 is required)

Model	
product brand name	SENTRON
product designation	Fault signal contact
design of the product	Mountable
design of the product factory mounted	No
electrical endurance (operating cycles) typical	10 000
Voltage	
insulation voltage rated value	440 V
surge voltage resistance rated value	4 kV
Supply voltage	
supply voltage at DC rated value	12 V
• minimum	
operating voltage	400 V
• rated value	
• at AC rated value minimum	
• at DC rated value minimum	
protection class IP	IP20
Control current	
type of voltage of control voltage	AC/DC
Product details	
product component	Yes
• fault signal contact	
number of fault signal contacts	1
number of NC contacts	0
number of NO contacts	2
number of CO contacts	0
product extension can be mounted	Universal
product extension	Fault signal contact
Connections	
connectable conductor cross-section	0.5 mm ²
• minimum	
• maximum	2.5 mm ²
tightening torque with screw-type terminals	1 N·m
• maximum	
type of connectable conductor cross-sections for AWG cables	24 ... 12
Mechanical Design	
height	90 mm
width	9 mm
depth	70 mm
number of modular width units	0.5

net weight	68 g
Environmental conditions	
standard	IEC/EN60947-5-1; IEC/EN62019
ambient temperature during operation	
• minimum	-25 °C
• maximum	55 °C
ambient temperature during storage minimum	-40 °C
General Product Approval	



[Confirmation](#)



[Miscellaneous](#)



Declaration of Conformity	Test Certificates	Marine / Shipping	other
----------------------------------	--------------------------	--------------------------	--------------



[Miscellaneous](#)



[Miscellaneous](#)

other	Railway	Environment
--------------	----------------	--------------------

[Confirmation](#)

[Vibration and Shock](#)

[Confirmation](#)

[Environmental Confirmations](#)

Further information

Siemens has decided to exit the Russian market (see here).

<https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business>

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3021>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3021>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)




http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3021


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

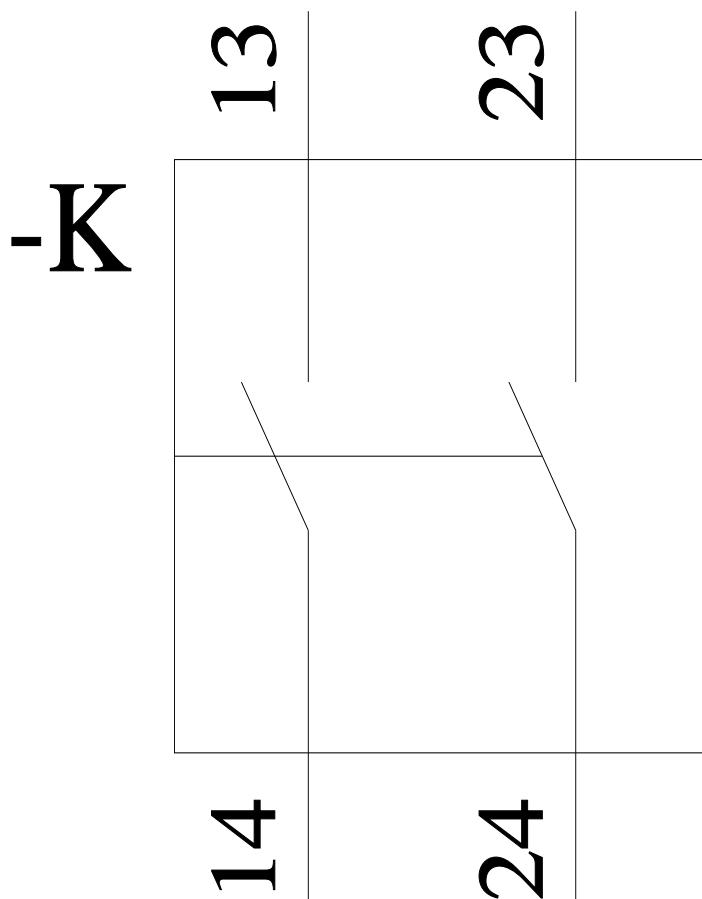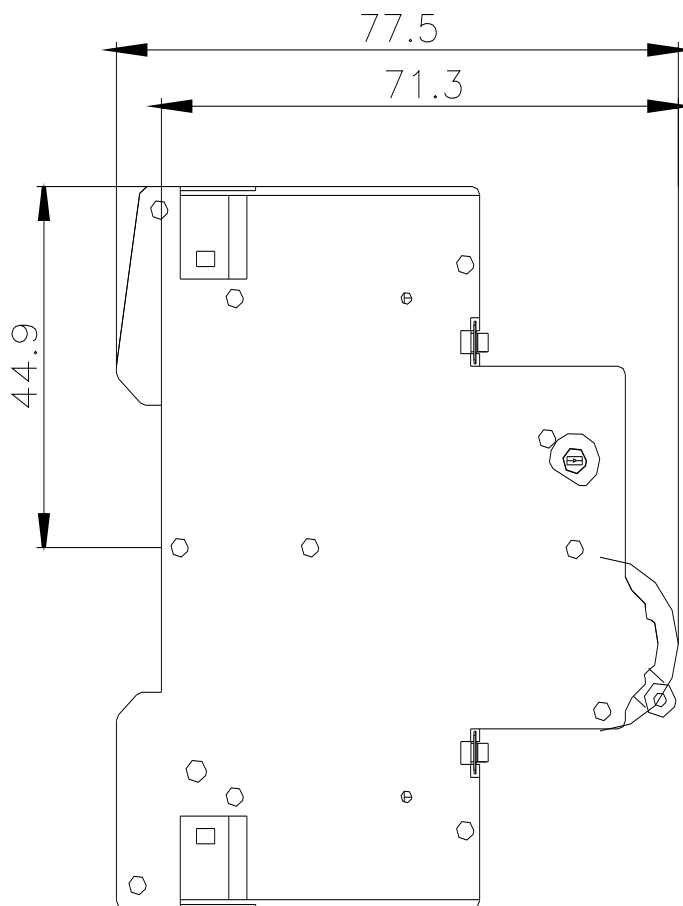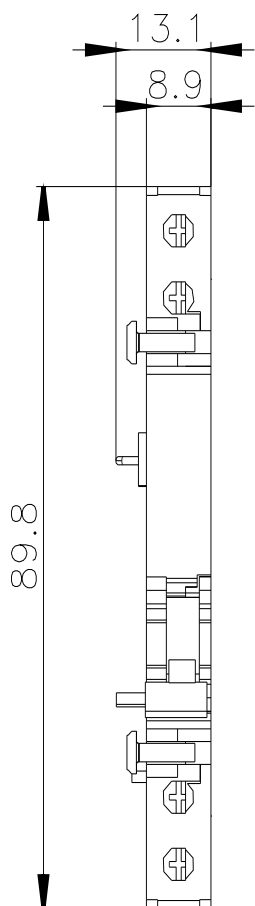

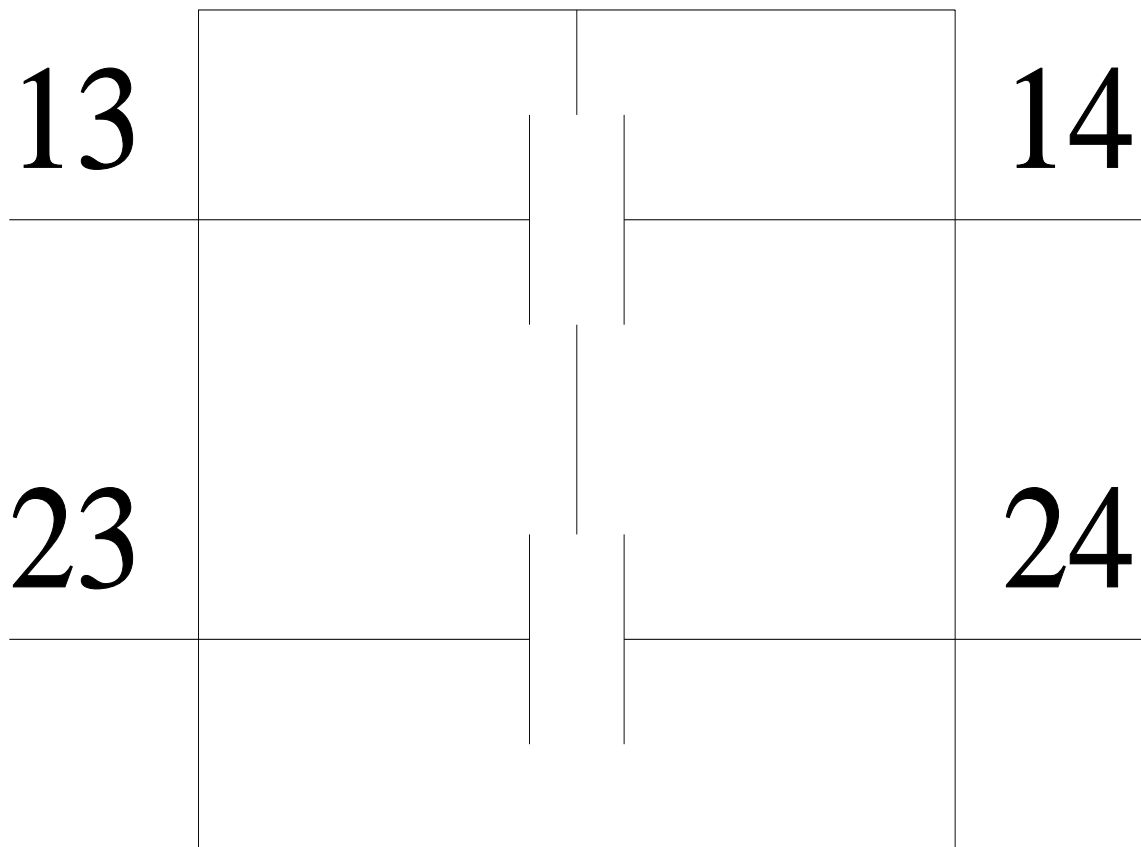

last modified:

3/14/2023 

