


Specifications

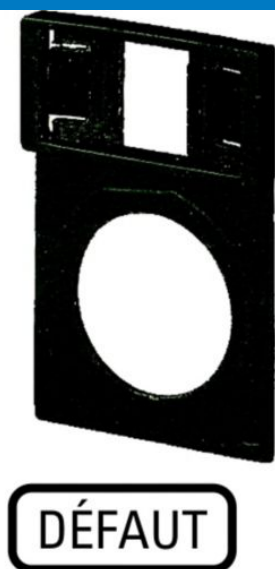

Eaton 072306

Eaton Moeller® series RMQ16 Carrier,
+label, DEFAULT

General specifications

PRODUCT NAME	Eaton Moeller® series RMQ16 Accessory Label mount with insert label
CATALOG NUMBER	072306
EAN	4015080723066
PRODUCT LENGTH/DEPTH	1 mm
PRODUCT HEIGHT	38 mm
PRODUCT WIDTH	25 mm
PRODUCT WEIGHT	1 g
CERTIFICATIONS	UL/CSA certification not required
MODEL CODE	Q25TS-386

Features & Functions

COLOR	Black
INSCRIPTION	Other
SHAPE	Rectangular

Climatic environmental conditions

AMBIENT OPERATING TEMPERATURE - MIN	-25 °C
AMBIENT OPERATING TEMPERATURE - MAX	60 °C

General

PRODUCT CATEGORY	Accessories
-------------------------	-------------

Communication

CONNECTION TO SMARTWIRE-DT	No
---------------------------------------	----

Design verification

EQUIPMENT HEAT DISSIPATION, CURRENT-DEPENDENT PVID	0 W
HEAT DISSIPATION CAPACITY PDISS	0 W
HEAT DISSIPATION PER POLE, CURRENT-DEPENDENT PVID	0 W
RATED OPERATIONAL CURRENT FOR SPECIFIED HEAT DISSIPATION (IN)	0 A
STATIC HEAT DISSIPATION, NON-CURRENT-DEPENDENT PVS	0 W
10.2.2 CORROSION RESISTANCE	Meets the product standard's requirements.
10.2.3.1 VERIFICATION OF THERMAL STABILITY OF ENCLOSURES	Meets the product standard's requirements.
10.2.3.2 VERIFICATION OF RESISTANCE OF INSULATING MATERIALS TO NORMAL HEAT	Meets the product standard's requirements.
10.2.3.3 RESIST. OF INSUL. MAT. TO ABNORMAL HEAT/FIRE BY INTERNAL ELECT. EFFECTS	Meets the product standard's requirements.
10.2.4 RESISTANCE TO ULTRA-VIOLET (UV) RADIATION	Please enquire
10.2.5 LIFTING	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 MECHANICAL IMPACT	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 INSCRIPTIONS	Meets the product standard's requirements.
10.3 DEGREE OF PROTECTION OF ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 CLEARANCES AND CREEPAGE DISTANCES	Meets the product standard's requirements.
10.5 PROTECTION AGAINST ELECTRIC SHOCK	Does not apply, since the entire switchgear needs to be evaluated.

Resources

CATALOGUES	eaton-pushbuttons-signal-towers-sensors-assortment-overview-catalog-ca047003en-en-us.pdf eaton-rmq-titan-brochure-br047004en-en-us.pdf
DECLARATIONS OF CONFORMITY	DA-DC-00004136.pdf DA-DC-00004158.pdf
DRAWINGS	eaton-operating-label-rmq16-accessory-dimensions.eps eaton-operating-button-symbol-010.eps
INSTALLATION INSTRUCTIONS	IL04716016Z
MCAD MODEL	DA-CS-schild_t DA-CD-schild_t

10.6 INCORPORATION OF SWITCHING DEVICES AND COMPONENTS	Does not apply, since the entire switchgear needs to be evaluated.
10.7 INTERNAL ELECTRICAL CIRCUITS AND CONNECTIONS	Is the panel builder's responsibility.
10.8 CONNECTIONS FOR EXTERNAL CONDUCTORS	Is the panel builder's responsibility.
10.9.2 POWER-FREQUENCY ELECTRIC STRENGTH	Is the panel builder's responsibility.
10.9.3 IMPULSE WITHSTAND VOLTAGE	Is the panel builder's responsibility.
10.9.4 TESTING OF ENCLOSURES MADE OF INSULATING MATERIAL	Is the panel builder's responsibility.
10.10 TEMPERATURE RISE	Not applicable.
10.11 SHORT-CIRCUIT RATING	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 ELECTROMAGNETIC COMPATIBILITY	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 MECHANICAL FUNCTION	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

PROJECT NAME:

PROJECT NUMBER:

PREPARED BY:

DATE: