



Timing relay, electronic OFF delay with control signal, 1 change-over contact 7 time ranges, 0.05 s...100 h 12-240 V AC/DC with LED, Screw terminal

<b>product brand name</b>	SIRIUS
<b>product designation</b>	timing relay
<b>design of the product</b>	OFF delay with control signal
<b>product type designation</b>	7PV15
<b>General technical data</b>	
<b>product component semi-conductor output</b>	No
<b>product extension required remote control</b>	No
<b>product extension optional remote control</b>	No
<b>insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value</b>	300 V
<b>test voltage for isolation test</b>	2.2 kV
<b>degree of pollution</b>	2
<b>surge voltage resistance rated value</b>	4 000 V
<b>test voltage for surge voltage test</b>	4 800 V
<b>protection class IP</b>	IP20
<b>shock resistance according to IEC 60068-2-27</b>	11g / 15 ms
<b>vibration resistance according to IEC 60068-2-6</b>	10 ... 55 Hz: 0.35 mm
<b>mechanical service life (switching cycles) typical</b>	10 000 000
<b>electrical endurance (switching cycles) at AC-15 at 230 V typical</b>	100 000
<b>adjustable time</b>	0.05 s ... 100 h
<b>relative setting accuracy relating to full-scale value</b>	5 %; +/-
<b>minimum ON period</b>	35 ms
<b>recovery time</b>	500 ms
<b>reference code according to IEC 81346-2</b>	K
<b>relative repeat accuracy</b>	2 %; +/-
<b>influence of the surrounding temperature</b>	2% in complete temperature range for the set duration
<b>power supply influence</b>	2% in complete voltage range for the set duration
<b>Substance Prohibitance (Date)</b>	05/01/2012
<b>Control circuit/ Control</b>	
<b>type of voltage of the control supply voltage</b>	AC/DC
<b>control supply voltage 1 at AC</b>	
• at 50 Hz	12 ... 240 V
• at 60 Hz	12 ... 240 V
<b>control supply voltage frequency 1</b>	50 ... 60 Hz
<b>control supply voltage 1</b>	
• at DC	12 ... 240 V
<b>operating range factor control supply voltage rated value at DC</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated</b>	

<b>value at AC at 50 Hz</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• full-scale value	1.1

### Switching Function

<b>switching function</b>	
• ON-delay	No
• ON-delay/instantaneous contact	No
• passing make contact	No
• passing make contact/instantaneous contact	No
• OFF delay	No
<b>switching function</b>	
• flashing symmetrically with interval start/instantaneous	No
• flashing symmetrically with interval start	No
• flashing symmetrically with pulse start/instantaneous	No
• flashing symmetrically with pulse start	No
• flashing asymmetrically with interval start	No
• flashing asymmetrically with pulse start	No
<b>switching function</b>	
• star-delta circuit with delay time	No
• star-delta circuit	No
<b>switching function with control signal</b>	
• additive ON-delay	No
• passing break contact	No
• passing break contact/instantaneous	No
• OFF delay	Yes
• OFF delay/instantaneous	No
• pulse delayed	No
• pulse delayed/instantaneous	No
• pulse-shaping	No
• pulse-shaping/instantaneous	No
• additive ON-delay/instantaneous	No
• ON-delay/OFF-delay	No
• ON-delay/OFF-delay/instantaneous	No
• passing make contact	No
• passing make contact/instantaneous contact	No
<b>switching function of interval relay with control signal</b>	
• retrotriggerable with deactivated control signal/instantaneous contact	No
• retrotriggerable with switched-on control signal	No
• retrotriggerable with switched-on control signal/instantaneous contact	No
• retriggerable with deactivated control signal	No
<b>design of the control terminal non-floating</b>	Yes

### Short-circuit protection

design of the fuse link for short-circuit protection of the auxiliary switch required	fuse gL/gG: 4 A
---	-----------------

### Auxiliary circuit

<b>material of switching contacts</b>	AgSnO <sub>2</sub>
<b>number of NC contacts</b>	
• delayed switching	0
• instantaneous contact	0
<b>number of NO contacts</b>	
• delayed switching	0
• instantaneous contact	0
<b>number of CO contacts</b>	
• delayed switching	1
• instantaneous contact	0
<b>operational current of auxiliary contacts at AC-15</b>	

<ul style="list-style-type: none"> <li>• maximum</li> <li>• at 24 V</li> <li>• at 250 V</li> </ul>	3 A
<b>operational current of auxiliary contacts as NC contact at AC-15</b>	3 A
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 250 V</li> </ul>	3 A
<b>operational current of auxiliary contacts as NO contact at AC-15</b>	3 A
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 250 V</li> </ul>	3 A
<b>operational current of auxiliary contacts at DC-13</b>	1 ... 0.01
<b>operational current of auxiliary contacts at DC-13</b>	1 A
<ul style="list-style-type: none"> <li>• at 24 V</li> <li>• at 125 V</li> <li>• at 250 V</li> </ul>	0.22 A
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>contact reliability of auxiliary contacts</b>	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
<b>contact rating of auxiliary contacts according to UL</b>	R150 / B300
<b>switching capacity current with inductive load</b>	0.01 ... 3 A
<b>Inputs/ Outputs</b>	
<b>product function</b>	No
<ul style="list-style-type: none"> <li>• at the relay outputs switchover delayed/without delay</li> <li>• non-volatile</li> </ul>	No
<b>Electromagnetic compatibility</b>	
EMC immunity according to IEC 61812-1	EN 61000-6-2
<b>conducted interference</b>	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> <li>• due to burst according to IEC 61000-4-4</li> <li>• due to conductor-earth surge according to IEC 61000-4-5</li> <li>• due to conductor-conductor surge according to IEC 61000-4-5</li> </ul>	2 kV
<b>field-based interference according to IEC 61000-4-3</b>	1 kV
<b>electrostatic discharge according to IEC 61000-4-2</b>	10 V/m
	4 kV contact discharge / 8 kV air discharge
<b>Safety related data</b>	
<b>type of insulation</b>	Basic insulation
<b>category according to EN 954-1</b>	none
<b>Connections/ Terminals</b>	
<b>product component removable terminal for auxiliary and control circuit</b>	No
type of electrical connection for auxiliary and control circuit	screw-type terminals
<b>type of connectable conductor cross-sections</b>	1x (0.2 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> <li>• at AWG cables solid</li> <li>• at AWG cables stranded</li> </ul>	1x (0.25 ... 1.5 mm <sup>2</sup> )
<b>connectable conductor cross-section</b>	1x (0.2 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• solid</li> <li>• finely stranded with core end processing</li> <li>• finely stranded without core end processing</li> </ul>	1x (24 ... 14)
<b>AWG number as coded connectable conductor cross section</b>	1x (24 ... 14)
<ul style="list-style-type: none"> <li>• solid</li> <li>• stranded</li> </ul>	24 ... 14
	24 ... 14
<b>Installation/ mounting/ dimensions</b>	
<b>mounting position</b>	any
<b>fastening method</b>	snap-on fastening on 35 mm DIN rail
<b>height</b>	90 mm
<b>width</b>	17.5 mm
<b>depth</b>	66.7 mm
<b>required spacing</b>	

- with side-by-side mounting
  - forwards 0 mm
  - backwards 0 mm
  - upwards 0 mm
  - downwards 0 mm
  - at the side 0 mm
- for grounded parts
  - forwards 0 mm
  - backwards 0 mm
  - upwards 0 mm
  - at the side 0 mm
  - downwards 0 mm
- for live parts
  - forwards 0 mm
  - backwards 0 mm
  - upwards 0 mm
  - downwards 0 mm
  - at the side 0 mm

#### Ambient conditions

installation altitude at height above sea level maximum	2 000 m
<b>ambient temperature</b>	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
relative humidity during operation	15 ... 85 %


#### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
 CCC	 UL	 EAC
 UK CA	 RCM	

Declaration of Conformity	Test Certificates	other
 EG-Konf.	<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a> <a href="#">Environmental Conformations</a>

#### Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7PV1538-1AW30>
- Cax online generator  
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=7PV1538-1AW30>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)  
<https://support.industry.siemens.com/cs/ww/en/ps/7PV1538-1AW30>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)  
[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=7PV1538-1AW30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=7PV1538-1AW30&lang=en)
- Characteristic: Derating  
<https://support.industry.siemens.com/cs/ww/en/ps/7PV1538-1AW30/manual>

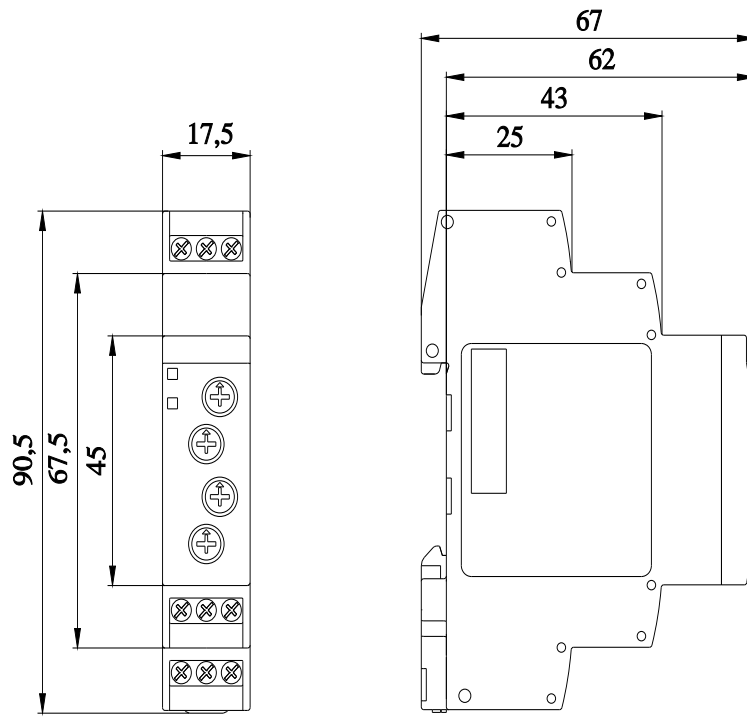

Alle Bemessungswerte sind in Millimeter (mm) angegeben  
 All dimensions are in millimeters (mm)

