


PRODUCT-DETAILS

# AF205-30-11-33

## AF205-30-11-33 Contactor

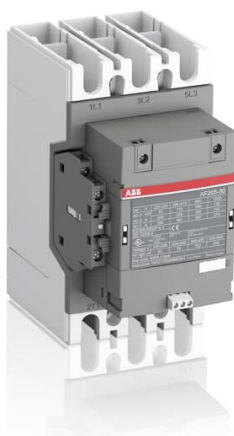

### Generell informasjon

Extended Product Type	AF205-30-11-33
Product ID	1SFL527002R3311
EAN	7320500480762
Catalog Description	AF205-30-11-33 Contactor
Long Description	A 3-phase Contactor suitable for various applications such as Motor starting, Isolation, Bypass and Distribution application up to max 1000 V. Controlled with PLC and with wide control voltage range 100-250 V, AC/DC

### Ordering

Minimum Order Quantity	1 piece
Customs Tariff Number	85364900

### Popular Downloads

Data Sheet, Technical Information	1SBC100192C02
Instructions and Manuals	1SFC100008M0201

### Dimensions

Product Net Width	105 mm
Product Net Depth / Length	169.5 mm
Product Net Height	196 mm
Product Net Weight	2.4 kg

## Technical

Number of Main Contacts NO	3
Number of Main Contacts NC	0
Number of Auxiliary Contacts NO	1
Number of Auxiliary Contacts NC	1
Rated Operational Voltage	Main Circuit 1000 V
Rated Frequency (f)	Main Circuit 60 Hz
Conventional Free-air Thermal Current ( $I_{th}$ )	acc. to IEC 60947-4-1, Open Contactors q = 40 °C 350 A
Rated Operational Current AC-1 ( $I_e$ )	(1000 V) 40 °C 275 A (1000 V) 60 °C 250 A (1000 V) 70 °C 200 A (690 V) 40 °C 350 A (690 V) 70 °C 240 A
Rated Operational Current AC-3 ( $I_e$ )	(415 V) 55 °C 205 A (440 V) 55 °C 205 A (500 V) 55 °C 186 A (690 V) 55 °C 165 A (1000 V) 55 °C 100 A (380 / 400 V) 55 °C 205 A (220 / 230 / 240 V) 55 °C 205 A
Rated Operational Power AC-3 ( $P_e$ )	(415 V) 110 kW (440 V) 132 kW (500 V) 132 kW (690 V) 160 kW (1000 V) 132 kW (380 / 400 V) 110 kW (220 / 230 / 240 V) 55 kW
Rated Breaking Capacity AC-3 acc. to IEC 60947-4-1	8 x I <sub>e</sub> AC-3
Rated Making Capacity AC-3 acc. to IEC 60947-4-1	10 x I <sub>e</sub> AC-3
Short-Circuit Protective Devices	gG Type Fuses 400 A
Rated Short-time Withstand Current ( $I_{cw}$ )	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 1640 A at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 350 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 670 A at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 2050 A at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 947 A
Maximum Electrical Switching Frequency	(AC-1) 300 cycles per hour (AC-2 / AC-4) 150 cycles per hour (AC-3) 300 cycles per hour
Rated Insulation Voltage ( $U_i$ )	acc. to IEC 60947-4-1 and VDE 0110 (Gr. C) 1000 V acc. to UL/CSA 600 V
Rated Impulse Withstand Voltage ( $U_{imp}$ )	8 kV

Mechanical Durability	5 million
Maximum Mechanical Switching Frequency	300 cycles per hour
Coil Operating Limits	(acc. to IEC 60947-4-1) Uc (at $\theta \leq 70^\circ\text{C}$ )
Rated Control Circuit Voltage ( $U_c$ )	50 Hz 100 ... 250 V 60 Hz 100 ... 250 V DC Operation 100 ... 250 V
Coil Consumption	Holding at Max. Rated Control Circuit Voltage 50 Hz 7 V·A Holding at Max. Rated Control Circuit Voltage 60 Hz 7 V·A Pull-in at Max. Rated Control Circuit Voltage 50 Hz 220 V·A Pull-in at Max. Rated Control Circuit Voltage 60 Hz 220 V·A Pull-in at Max. Rated Control Circuit Voltage DC 190 W
Operate Time	Between Coil De-energization and NO Contact Opening 37 ... 47 ms Between Coil Energization and NO Contact Closing 25 ... 55 ms
Degree of Protection	acc. to IEC 60529, IEC 60947-1, EN 60529 Auxiliary Terminals IP40
Terminal Type	Main Circuit: Bars

## Technical UL/CSA

Maximum Operating Voltage UL/CSA	Main Circuit 1000 V
General Use Rating UL/CSA	(600 V AC) 300 A

## Environmental

Ambient Air Temperature	Close to Contactor Fitted with Thermal O/L Relay (0.85 ... 1.1 Uc) -25 ... +55 °C Close to Contactor without Thermal O/L Relay (0.85 ... 1.1 Uc) -40 ... +70 °C Close to Contactor for Storage -40 ... +70 °C
Maximum Operating Altitude Permissible	3000 m
RoHS Status	Following EU Directive 2015/863 July 22, 2019 (RoHS 3)

## Certificates and Declarations (Document Number)

ABS Certificate	14-LD1092198-PDA
BV Certificate	BV_36353_A0BV
CB Certificate	SE-82315
CCC Certificate	CQC_2014010304676685
CCS Certificate	GB14T00030
cUL Certificate	20121023-E36588
Declaration of Conformity - CE	2CMT2015-005439
DNV Certificate	DNV_E-14043
DNV GL Certificate	DNV_E-14043
EAC Certificate	9AKK107046A8618
Environmental Information	2CMT004732 1SAC200042H0004
GL Certificate	GL_95072-14HH
Instructions and Manuals	1SFC100008M0201
KC Certificate	9AKK107046A9912

LR Certificate	LR_14_70011(E1)
PRS Certificate	TE_2092_880423_16
RINA Certificate	ELE060313XG_002
RMRS Certificate	9AKK107045A6978
RoHS Information	2CMT2015-005439
UL Listing Card	UL_E36588

## Container Information

Package Level 1 Units	box 1 piece
Package Level 1 Width	160 mm
Package Level 1 Depth / Length	258 mm
Package Level 1 Height	235 mm
Package Level 1 Gross Weight	3 kg
Package Level 1 EAN	7320500480762

## Classifications

Object Classification Code	Q
ETIM 4	EC000066 - Magnet contactor, AC-switching
ETIM 5	EC000066 - Magnet contactor, AC-switching
ETIM 6	EC000066 - Power contactor, AC switching
ETIM 7	EC000066 - Power contactor, AC switching
UNSPSC	39121529
IDEA Granular Category Code (IGCC)	4755 >> Contactors
E-Number (Finland)	3707506

## Kategorier

Lavspenningsprodukter → Startapparater → Kontaktorer → Blokk-kontaktorer

