



# variable speed drive, Altivar Machine ATV340, 15kW, heavy duty, 400V, 3 phases

ATV340D15N4

#### Main

Range of product	Altivar Machine ATV340
product or component type	Variable speed drive
Product specific application	Machine
variant	Standard version
mounting mode	Cabinet mount
Communication port protocol	Modbus serial
Option card	Communication module, Profibus DP V1 Communication module, PROFINET Communication module, DeviceNet Communication module, CANopen Communication module, EtherCAT
Network number of phases	3 phases
Supply frequency	5060 Hz +/- 5 %
[Us] rated supply voltage	380480 V - 1510 %
Nominal output current	32.0 A
Motor power kW	18.5 kW for normal duty 15 kW for heavy duty
Motor power hp	25 hp for normal duty 20 hp for heavy duty
EMC filter	Class C3 EMC filter integrated
IP degree of protection	IP20

## Complementary

Discrete input number	5	
Discrete input type	PTI programmable as pulse input: 030 kHz, 24 V DC (30 V) DI1DI5 safe torque off, 24 V DC (30 V), impedance: 3.5 kOhm programmable	
number of preset speeds	16 preset speeds	
Discrete output number	2.0	
Discrete output type	Programmable output DQ1, DQ2 30 V DC 100 mA	
Analogue input number	2	
Analogue input type	Al1 software-configurable current: 020 mA, impedance: 250 Ohm, resolution 12 bits Al1 software-configurable temperature probe or water level sensor Al1 software-configurable voltage: 010 V DC, impedance: 31.5 kOhm, resolution 12 bits Al2 software-configurable voltage: - 1010 V DC, impedance: 31.5 kOhm, resolution 12 bits	

02-Jul-2024 Life Is On Schneider



Analogue output number	1	
Analogue output type	Software-configurable voltage AQ1: 010 V DC impedance 470 Ohm, resolution 10 bits Software-configurable current AQ1: 020 mA impedance 500 Ohm, resolution 10 bits	
Relay output number	2	
Output voltage	<= power supply voltage	
Relay output type	Relay outputs R1A Relay outputs R1C electrical durability 100000 cycles Relay outputs R2A Relay outputs R2C electrical durability 100000 cycles	
Maximum switching current	Relay output R1C on resistive load, cos phi = 1: 3 A at 250 V AC Relay output R1C on resistive load, cos phi = 1: 3 A at 30 V DC Relay output R1C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R1C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC Relay output R2C on resistive load, cos phi = 1: 5 A at 250 V AC Relay output R2C on resistive load, cos phi = 1: 5 A at 30 V DC Relay output R2C on inductive load, cos phi = 1: 5 A at 30 V DC Relay output R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 250 V AC Relay output R2C on inductive load, cos phi = 0.4 and L/R = 7 ms: 2 A at 30 V DC	
Minimum switching current	Relay output R1B: 5 mA at 24 V DC Relay output R2C: 5 mA at 24 V DC	
Physical interface	2-wire RS 485	
Connector type	1 RJ45	
Method of access	Slave Modbus RTU	
Transmission rate	4.8 kbit/s 9.6 kbit/s 19.2 kbit/s 38.4 kbit/s	
Transmission frame	RTU	
Number of addresses	1247	
Data format	8 bits, configurable odd, even or no parity	
Type of polarization	No impedance	
4 quadrant operation possible	True	
Asynchronous motor control profile	Variable torque standard Optimized torque mode Constant torque standard	
Synchronous motor control profile	Reluctance motor Permanent magnet motor	
Pollution degree	2 conforming to IEC 61800-5-1	
Maximum output frequency	0.599 kHz	
Acceleration and deceleration ramps	Linear adjustable separately from 0.019999 s S, U or customized	
Motor slip compensation	Automatic whatever the load Adjustable Not available in permanent magnet motor law Can be suppressed	
Switching frequency	216 kHz adjustable 716 kHz with derating factor	
Nominal switching frequency	4 kHz	
Braking to standstill	By DC injection	
Brake chopper integrated	True	

Line current	37.4 A at 380 V (normal duty)	
	30.2 A at 480 V (normal duty) 44.9 A at 380 V (heavy duty)	
	35.7 A at 480 V (heavy duty)	
	55.7 Mat 450 V (hoavy daty)	
Line current	44.9 A at 380 V without line choke (heavy duty)	
	35.7 A at 480 V without line choke (heavy duty)	
	42.4 A at 380 V with external line choke (normal duty)	
	34.1 A at 480 V with external line choke (normal duty)	
	45.5 A at 380 V with external line choke (heavy duty)	
	36.0 A at 480 V with external line choke (heavy duty)	
Maximum input current	44.9 A	
Maximum output voltage	480 V	
Apparent power	28.3 kVA at 480 V (normal duty)	
	29.7 kVA at 480 V (heavy duty)	
Maximum transient current	42.0 A during 60 s (normal duty)	
	42.9 A during 60 s (normal duty) 48 A during 60 s (heavy duty)	
	52.7 A during 2 s (normal duty)	
	58 A during 2 s (heavy duty)	
Electrical connection	Screw terminal, clamping capacity: 0.22.5 mm² for control	
	Screw terminal, clamping capacity: 625 mm² for line side	
	Screw terminal, clamping capacity: 625 mm² for DC bus	
	Screw terminal, clamping capacity: 425 mm² for motor	
Prospective line Isc	22 kA	
Base load current at high overload	32.0 A	
Base load current at low overload	39.0 A	
Power dissipation in W	Natural convection: 18 W at 380 V, switching frequency 4 kHz (heavy duty)	
·	Forced convection: 346 W at 380 V, switching frequency 4 kHz (heavy duty)	
	Natural convection: 21 W at 380 V, switching frequency 4 kHz (normal duty)	
	Forced convection: 411 W at 380 V, switching frequency 4 kHz (normal duty)	
Electrical connection	Control: screw terminal 0.22.5 mm²/AWG 24AWG 12	
	Line side: screw terminal 625 mm²/AWG 8AWG 3	
	DC bus: screw terminal 625 mm²/AWG 8AWG 3	
	Motor: screw terminal 425 mm²/AWG 10AWG 3	
With a fate from the Cafety	_	
With safety function Safely Limited Speed (SLS)	True	
With safety function Safe brake management (SBC/SBT)	True	
With safety function Safe	False	
Operating Stop (SOS)	1 dioc	
With safety function Safe Position (SP)	False	
With safety function Safe programmable logic	False	
	False False	
programmable logic With safety function Safe Speed		
programmable logic  With safety function Safe Speed Monitor (SSM)  With safety function Safe Stop 1	False	
programmable logic  With safety function Safe Speed Monitor (SSM)  With safety function Safe Stop 1 (SS1)	False True	
programmable logic  With safety function Safe Speed Monitor (SSM)  With safety function Safe Stop 1 (SS1)  With sft fct Safe Stop 2 (SS2)  With safety function Safe torque off (STO)  With safety function Safely	False True False	
programmable logic  With safety function Safe Speed Monitor (SSM)  With safety function Safe Stop 1 (SS1)  With sft fct Safe Stop 2 (SS2)  With safety function Safe torque off (STO)	False True False True	

rection: motor  ff: motor oss: motor oss: motor ection: drive ff: drive drive drive drive urrent between motor phase and earth: drive urrent between motor phases: drive tetween motor phases: drive
ection: drive  ff: drive  drive  drive  drive  urrent between motor phase and earth: drive  urrent between motor phases: drive  letween motor phases: drive  letween motor phases: drive  letween motor phases: drive
ff: drive drive drive drive urrent between motor phase and earth: drive urrent between motor phases: drive urtent between motor phases: drive uetween motor phase and earth: drive uetween motor phases: drive
drive drive urrent between motor phase and earth: drive urrent between motor phases: drive urtent between motor phases: drive uetween motor phase and earth: drive uetween motor phases: drive
drive  Irrent between motor phase and earth: drive  Irrent between motor phases: drive  Ietween motor phase and earth: drive  Ietween motor phases: drive
urrent between motor phase and earth: drive urrent between motor phases: drive etween motor phase and earth: drive etween motor phases: drive
urrent between motor phases: drive etween motor phase and earth: drive etween motor phases: drive etween motor phases: drive
etween motor phase and earth: drive letween motor phases: drive
etween motor phases: drive
·
oss: drive
roltage: drive
vervoltage: drive
ndervoltage: drive
oss: drive
it speed: drive
control circuit: drive
for normal duty
for heavy duty

## **Environment**

Operating altitude	<= 3000 m with current derating above 1000m	
Operating position	Vertical +/- 10 degree	
Product certifications	UL CSA TÜV EAC CTick	
marking	CE	
Standards	IEC 61800-3 IEC 61800-5-1 IEC 60721-3 IEC 61508 IEC 13849-1 UL 618000-5-1 UL 508C	
Assembly style	With heat sink	
Electromagnetic compatibility	Electrostatic discharge immunity test level 3 conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 conforming to IEC 61000-4-4 1.2/50 µs - 8/20 µs surge immunity test level 3 conforming to IEC 61000-4-5 Conducted radio-frequency immunity test level 3 conforming to IEC 61000-4-6	
Environmental class (during operation)	Class 3C3 according to IEC 60721-3-3 Class 3S3 according to IEC 60721-3-3	
Maximum acceleration under shock impact (during operation)	70 m/s² at 22 ms	
Maximum acceleration under vibrational stress (during operation)	5 m/s² at 9200 Hz	
Maximum deflection under vibratory load (during operation)	1.5 mm at 29 Hz	
Permitted relative humidity (during operation)	Class 3K5 according to EN 60721-3	
Volume of cooling air	128.0 m3/h	
Type of cooling	Forced convection	
Overvoltage category	Class III	

Regulation loop	Adjustable PID regulator
Noise level	55.6 dB
Pollution degree	2
Ambient air transport temperature	-4070 °C
Ambient air temperature for operation	-1550 °C without derating (vertical position) 5060 °C with derating factor (vertical position)
Ambient air temperature for storage	-4070 °C
Isolation	Between power and control terminals

# **Packing Units**

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	34.000 cm
Package 1 Width	30.500 cm
Package 1 Length	56.000 cm
Package 1 Weight	11.140 kg
Unit Type of Package 2	P06
Number of Units in Package 2	2
Package 2 Height	75.000 cm
Package 2 Width	60.000 cm
Package 2 Length	80.000 cm
Package 2 Weight	35.280 kg

# Sustainability Screen Premium

**Green Premium**<sup>TM</sup> **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

#### Resource performance



Upgraded Components Available

## Well-being performance



Mercury Free



Rohs Exemption Information

Yes


#### **Certifications & Standards**

Reach Regulation	Pro-active compliance (Product out of EU RoHS legal scope)	
Eu Rohs Directive		
China Rohs Regulation	China RoHS declaration	
Environmental Disclosure	Product Environmental Profile	
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins	
Circularity Profile	End of Life Information	

#### **Dimensions Drawings**

#### **Dimensions**


#### Views: Front - Left - Rear

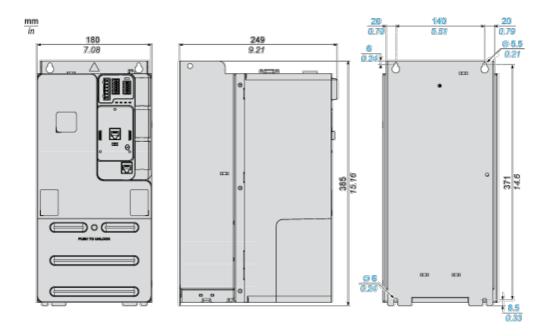


## ATV340D15N4

Mounting and Clearance

#### Clearance

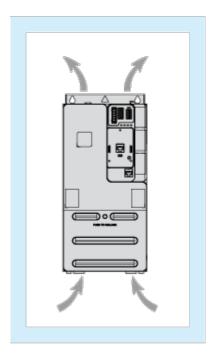

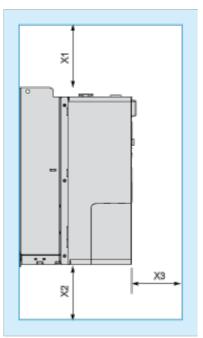

Dimensions in mm


X1	X2	X3
≥ 100	≥ 100	≥ 60

#### Dimensions in in.

X1	X2	X3
≥ 3.94	≥ 3.94	≥ <sub>2.36</sub>


#### **Mounting Types**

#### Mounting Type A: Side by Side IP20



Possible, at ambient temperature ≤ 50 °C (122 °F)

#### Mounting Type B: Individual IP20

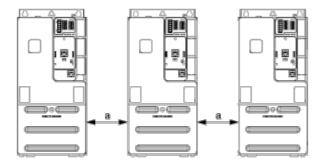


a 50 mm (1.97 in.) from 50...60°C, no restriction below 50°C

#### Connections and Schema

#### **Connections and Schema**

# Three-phase Power Supply with Upstream Breaking via Line Contactor Without Safety Function STO

Connection diagrams conforming to standards ISO13849 category 1 and IEC/EN 61508 capacity SIL1, stopping category 0 in accordance with standard IEC/EN 60204-1.

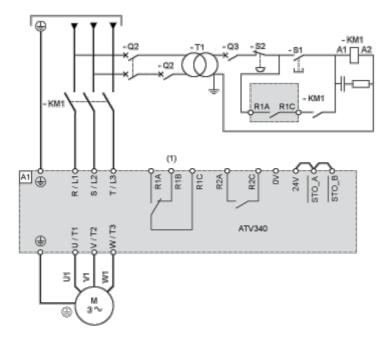

(1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.

A1: Drive


KM1: Line ContactorQ2, Q3: Circuit breakers

S1: PushbuttonS2: Emergency stop

T1: Transformer for control part

Three-phase Power Supply With Downstream Breaking via Switch Disconnector

#### ATV340D15N4

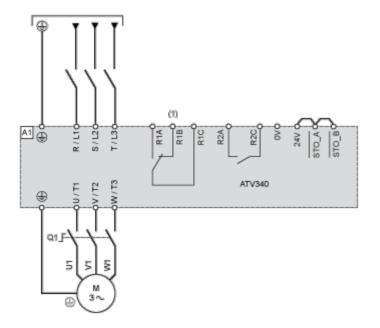


(1) Use relay output R1 set to operating state Fault to switch Off the product once an error is detected.

A1: Drive


Q1: Switch disconnector

#### **Sensor Connection**



It is possible to connect either 1 or 3 sensors on terminals Al1.

#### **Control Block Wiring Diagram**

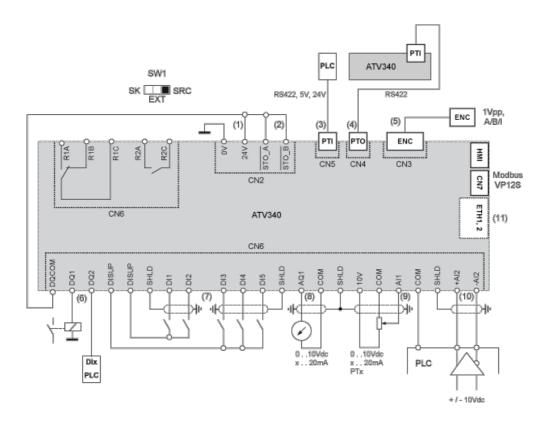


- (1) 24V supply (STO)
- (2) STO Safe Torque Off
- (3) PTI Pulse Train In
- (4) PTO Pulse Train Out
- (5) Motor Encoder connection
- (6) Digital outputs
- (7) Digital inputs
- (8) Analog output
- (9) Analog input
- (10) Differential Analog Input
- (11) Ethernet port (only on Ethernet drive version)

SW1: Sink/Source switch
R1A, R1B, R1C: Fault relay
R2A, R2C: Sequence relay

#### **Digital Inputs Wiring**


#### **Digital Inputs: Internal Supply**



In SRC position DISUP outputs 24 V. In SK position DISUP is connected to 0 V.

#### **Digital Inputs: External Supply**


## Positive Logic, Source, European Style

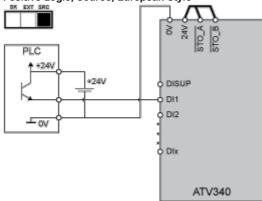

# Negative Logic, Sink, Asian Style | Style="block" | Style="bl

Digital Inputs: Internal supply Negative Logic, Sink, Asian Style

## ATV340D15N4

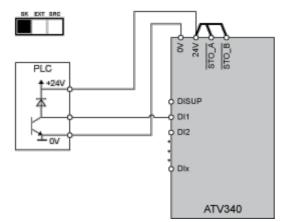


## ATV340D15N4

#### **Digital Outputs Wiring**


#### **Digital Outputs: Internal Supply**

Positive Logic, Source, European Style, DQCOM to +24V



(1) Relay or valve


Negative Logic, Sink, Asian Style, DQCOM to 0V



(1) Relay or valve

#### **Digital Outputs: External Supply**


Positive Logic, Source, European Style, DQCOM to +24V



(1) Relay or valve

Negative Logic, Sink, Asian Style, DQCOM to 0V

# ATV340D15N4




(1) Relay or valve

#### ATV340D15N4


#### Performance Curves

#### **Open Loop Applications**

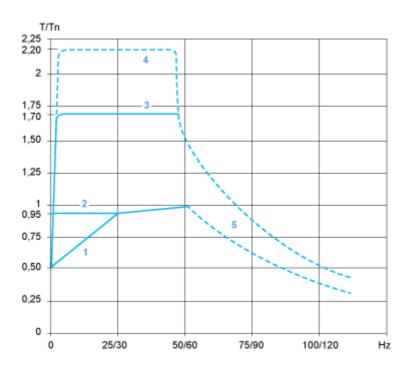

- 1: Self-cooled motor: continuous useful torque
- 2: Force-cooled motor: continuous useful torque
- 3: Overtorque for 60 s maximum
- 4: Transient overtorque for 2 s maximum
- 5: Torque in overspeed at constant power

#### **Closed Loop Applications**

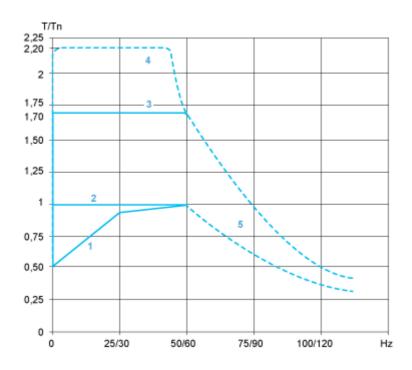

- 1: Self-cooled motor: continuous useful torque
- 2: Force-cooled motor: continuous useful torque
- 3: Overtorque for 60 s maximum
- 4: Transient overtorque for 2 s maximum
- 5: Torque in overspeed at constant power