Product data sheet

Specifications





servo motor BCH, Lexium 28, 130mm, 600W, with oil seal, smooth, brake, straight connection

BCH2MM0612CF6C

Product availability: Non-Stock - Not normally stocked in distribution facility

Price*: 3,278.02 USD

Main

Range Compatibility	Lexium 28
Device short name	BCH2
Product or Component Type	Servo motor

Complementary

Maximum mechanical speed	3000 rpm
[Us] rated supply voltage	220 V 110 V
Phase	Three phase Single phase
Continuous stall current	3.77 A
Continuous stall torque	50.71 lbf.in (5.73 N.m) LXM28 4.5 A, 220 V, single phase 50.71 lbf.in (5.73 N.m) LXM28 4.5 A, 220 V, three phase 50.71 lbf.in (5.73 N.m) LXM28 9 A, 110 V, single phase
Continuous power	600 W
Peak stall torque	152.14 lbf.in (17.19 N.m) LXM28 4.5 A, 220 V, single phase 152.14 lbf.in (17.19 N.m) LXM28 4.5 A, 220 V, three phase 152.14 lbf.in (17.19 N.m) LXM28 9 A, 110 V, single phase
Nominal output power	600 W LXM28 4.5 A, 220 V, single phase 600 W LXM28 4.5 A, 220 V, three phase 600 W LXM28 9 A, 110 V, single phase
Nominal torque	50.71 lbf.in (5.73 N.m) LXM28 4.5 A, 220 V, single phase 50.71 lbf.in (5.73 N.m) LXM28 4.5 A, 220 V, three phase 50.71 lbf.in (5.73 N.m) LXM28 9 A, 110 V, single phase
Nominal speed	1000 rpm LXM28 4.5 A, 220 V, single phase 1000 rpm LXM28 4.5 A, 220 V, three phase 1000 rpm LXM28 9 A, 110 V, single phase
Maximum current Irms	13.44 A LXM28 0.6 kW, 220 V 13.44 A LXM28 0.6 kW, 110 V
Maximum permanent current	4.1 A
Product compatibility	LXM28 servo drive 0.6 kW, 220 V, single phase LXM28 servo drive 0.6 kW, 220 V, three phase LXM28 servo drive 0.6 kW, 110 V, single phase
Shaft end	Smooth shaft
Shaft diameter	0.9 in (22 mm)
Shaft length	1.8 in (45 mm)
Feedback type	20 bits single turn absolute encoder

Price is "List Price" and may be subject to a trade discount - check with your local distributor or retailer for actual price.

Holding brake	With
Holding torque	85.0 lbf.in (9.6 N.m) built-in
Mounting Support	Asian standard flange
Motor flange size	5.1 in (130 mm)
Electrical connection	Connector MIL
Torque constant	1.52 N.m/A 68 °F (20 °C)
Back emf constant	92 V/krpm 68 °F (20 °C)
Rotor inertia	6.91 kg.cm ²
Stator resistance	1.93 Ohm 68 °F (20 °C)
Stator inductance	24.9 mH 68 °F (20 °C)
Stator electrical time constant	12.9 ms 68 °F (20 °C)
Maximum radial force Fr	670 N 1000 rpm
Maximum axial force Fa	200 N
Brake pull-in power	19.7 W
Type of cooling	Natural convection
Length	7.2 in (183 mm)
Number of motor stacks	1
Centring collar diameter	4.3 in (110 mm)
Centring collar depth	0.3 in (8 mm)
Number of mounting holes	4
Mounting holes diameter	0.4 in (9.2 mm)
Circle diameter of the mounting holes	5.7 in (145 mm)
Distance shaft shoulder-flange	0.3 in (8 mm)
Net Weight	18.08 lb(US) (8.2 kg)

Environment

IP Degree of Protection	IP50 IM V3 IP65 IM B5, IM V1
Ambient Air Temperature for Operation	32104 °F (040 °C)

Ordering and shipping details

Category	US1PC5318281
Discount Schedule	PC53
GTIN	3606480734571
Returnability	No
Country of origin	CN

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	7.1 in (18.1 cm)
Package 1 Width	9.06 in (23.0 cm)

Package 1 Length

14.2 in (36.0 cm)

Package 1 Weight

20.64 lb(US) (9.36 kg)

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance

Reach Free Of Svhc
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards


Reach Regulation	REACh Declaration		
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)		
China Rohs Regulation	China RoHS declaration		
Environmental Disclosure	Product Environmental Profile		
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.		
Circularity Profile	End of Life Information		
California Proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov		

Product data sheet

Dimensions Drawings

Dimensions


Dimensions of Motor

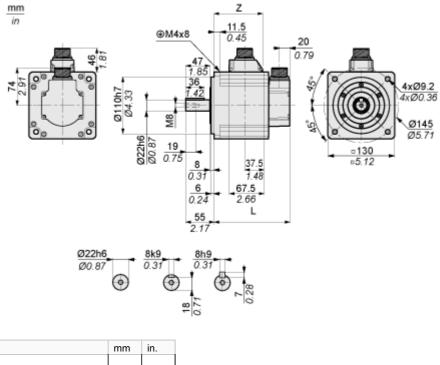

	mm	in.
L (without holding brake)	147	5.79
L (with holding brake)	183	7.2
Z	94.5	3.72

Performance Curves

Torque/Speed Curves with 230 V Single/Three Phase Supply Voltage

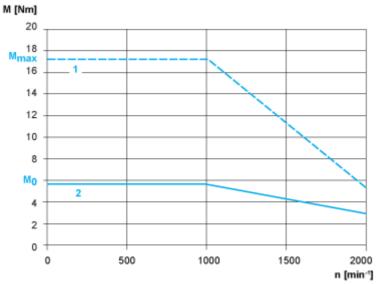

Servo Motor with LXM28AU02 ••• Servo Drive

- 1: Peak torque
- 2: Continuous torque