Product datasheet

Specification





brushless dc motor 24..36 V - CANopen DS301 interface - L = 174 mm - 92:1

ILE1F661PB1A7

Discontinued on: 9 Feb 2023

! Discontinued

EAN Code: 3389119222372

Main

Range of product	Lexium integrated drive	
product or component type	Motion integrated drive	
Device short name	ILE	
Motor type	Brushless DC motor	
Number of motor poles	6	
Network number of phases	Single phase	
[Us] rated supply voltage	24 V 36 V	
Network type	DC	
Communication interface	CANopen DS301, integrated	
Length	229 mm	
Winding type	Medium speed of rotation and medium torque	
Electrical connection	Printed circuit board connector	
Holding brake	Without	
Gear box type	Worm gear, 3 stages	
Reduction ratio	92:1 (735:5)	
Nominal speed	44 rpm at 24 V 44 rpm at 36 V	
Nominal torque	9 N.m at 24 V 9.2 N.m at 36 V	

Complementary

Transmission rate	50, 100, 125, 250, 500, 800 and 1000 kbauds
mounting support	Flange
Motor flange size	66 mm
Number of motor stacks	1
Centring collar diameter	36 mm
Number of mounting holes	2
Mounting holes diameter	4.4 mm
Feedback type	BLDC encoder
Shaft end	Hole
Second shaft	Without second shaft end

Supply voltage limits	1840 V
Current consumption	7000 mA peak 5500 mA maximum continuous
Associated fuse rating	10 A
Input/output type	4 signals (each be used as input or output)
Voltage state 0 guaranteed	-34.5 V
Voltage state 1 guaranteed	1530 V
Discrete input current	10 mA at 24 V on/STO_A for safety input 3 mA at 24 V on/STO_B for safety input 2 mA at 24 V for 24 V signal interface
Discrete output voltage	2325 V
Maximum switching current	100 mA per output 200 mA total
Protection type	Overload of output voltage Short circuit of the output voltage Safe torque off
Maximum supply current	0.1 A (power stage disabled) 6.8 A at 24 V 3.8 A at 36 V
Nominal output power	41 W at 24 V 42 W at 36 V
Peak stall torque	11.96 N.m at 24 V 16.56 N.m at 36 V
Continuous stall torque	11.7 N.m
Detent torque	12.3 N.m
Speed feedback resolution	12 points/turn motor 0.33° gearbox output
Accuracy error	+/- 1 point
Maximum torsional backlash	1°
Rotor inertia	1270 kg.cm²
Maximum mechanical speed	54 rpm
Maximum radial force Fr	200 N
Maximum axial force Fa	80 N
Service life in hours	9000 h bearing
marking	CE
Type of cooling	Natural convection
net weight	2.3 kg

Environment

Standards	IEC 50347 EN 61800-3 : 2001-02 IEC 61800-3 EN 61800-3:2001, second environment IEC 50178 IEC 60072-1 IEC 61800-3, Ed 2
Product certifications	TÜV UL cUL
Ambient air temperature for operation	5065 °C (with power derating of 2 % per °C) 050 °C (without derating)

Permissible ambient air temperature around the device	105 °C power amplifier 110 °C motor
Ambient air temperature for storage	-2570 °C
Operating altitude	<= 1000 m without derating
Relative humidity	1585 % without condensation
Vibration resistance	20 m/s² (f= 10500 Hz) 10 cycles conforming to IEC 60068-2-6
Shock resistance	150 m/s² 1000 shocks conforming to IEC 60068-2-29
IP degree of protection	IP41 shaft bushing: conforming to IEC 60034-5 IP54 total except shaft bushing: conforming to IEC 60034-5

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	9.0 cm
Package 1 Width	19.0 cm
Package 1 Length	38.5 cm
Package 1 Weight	2.25 kg
Unit Type of Package 2	S04
Number of Units in Package 2	3
Package 2 Height	30 cm
Package 2 Width	40 cm
Package 2 Length	60 cm
Package 2 Weight	8.0 kg

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance

②	Mercury Free	
	Rohs Exemption Information	Yes
	Pvc Free	

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information


3 Jul 2024

ILE1F661PB1A7

Dimensions Drawings

Integrated Drive with Worm Gear


Dimensions

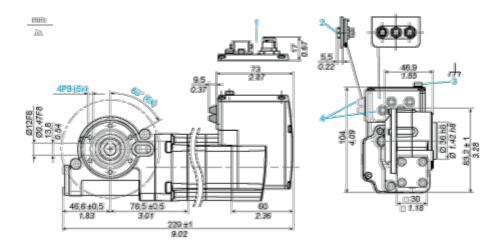

- 1 Option: industrial connectors
- 2 Accessories: I/O signal insert with industrial connectors
- 3 Earth (ground) terminal
- 4 Accessories: cable entries $\emptyset = 3 \dots 9 \text{ mm/0.12} \dots 0.35 \text{ in.}$


Connections and Schema

Connection Example with 4 I/O Signals

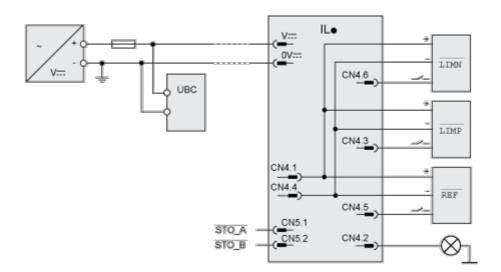

Performance Curves

Torque Characteristics



- X1 Speed of rotation of motor in rpm
- X2 Speed of rotation of gearing in rpm
- Y Torque in Nm
- 1.1 Max. torque at 24 V
- 1.2 Max. torque at 36 V