Product datasheet





voltage control relay, Harmony Control Relays, 5A, 1CO, 65...260V AC DC

RM17UAS15

Main

Range Of Product	Harmony Control Relays
Relay Type	Voltage control relay
Product Or Component Type	Voltage control relay
Product Specific Application	For single-phase and DC supply
Relay Name	RM17UAS
Relay Monitored Parameters	Overvoltage or undervoltage detection
Time Delay	Adjustable 0.110 s, 0 + 10 % Tt- time delay upon fault
Switching Capacity In Va	1250 VA
Measurement Range	65260 V AC/DC
Contacts Type And Composition	1 C/O

Complementary

Reset Time	1500 ms time delay
Maximum Switching Voltage	250 V AC/DC
Minimum Switching Current	10 mA at 5 V DC
Maximum Switching Current	5 A AC/DC
Supply Voltage Limits	50270 V AC/DC
Power Consumption In Va	03 VA AC
Maximum Power Consumption In W	1 W DC
Control Circuit Frequency	5060 Hz +/- 10 %
Immunity To Microbreaks	20 ms
Output Contacts	1 C/O
Nominal Output Current	5 A
Hysteresis	520 % of threshold setting
Measurement Accuracy	+/- 10 % of the full scale value
Polarity	Non reversible polarity on DC supply
Delay At Power Up	1000 ms DC 500 ms AC
Maximum Measuring Cycle	150 ms measurement cycle as true rms value
Repeat Accuracy	+/- 0.5 % for input and measurement circuit +/- 1 % for time delay

21 Jun 2024 Life Is On Schneider

Measurement Error	< 1 % over the whole range with voltage variation 0.2 %/°C with temperature variation
Quality Labels	CE
Insulation Resistance	> 500 MOhm at 500 V DC conforming to IEC 60255-5 > 500 MOhm at 500 V DC conforming to IEC 60664-1
Operating Position	Any position without derating
Local Signalling	LED (green) for power ON LED (yellow) for relay ON
Overvoltage Category	III conforming to IEC 60664-1
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60664-1 400 V conforming to IEC 60664-1
Connections - Terminals	Screw terminals, 1 x 0.51 x 4 mm² (AWG 20AWG 11) solid without cable end Screw terminals, 2 x 0.52 x 2.5 mm² (AWG 20AWG 14) solid without cable end Screw terminals, 1 x 0.22 x 2.5 mm² (AWG 24AWG 12) flexible with cable end Screw terminals, 2 x 0.22 x 1.5 mm² (AWG 24AWG 16) flexible with cable end
Tightening Torque	0.61 N.m conforming to IEC 60947-1
Housing Material	Self-extinguishing plastic
Mounting Support	35 mm symmetrical DIN rail conforming to IEC 60715
Electrical Durability	100000 cycles
Mechanical Durability	30000000 cycles
Operating Rate	<= 360 operations/hour full load
Utilisation Category	AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 DC-14 conforming to IEC 60947-5-1
[Un] Rated Nominal Voltage	, self-powered
Control Type	Without test button
Width	17.5 mm
Net Weight	0.08 kg

Environment

Electromagnetic Compatibility	Emission standard for industrial environments conforming to IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Immunity for industrial environments conforming to NF EN/IEC 61000-6-2
Ambient Air Temperature For Operation	-2050 °C
Vibration Resistance	0.35 mm (f= 557.6 Hz) conforming to IEC 60068-2-6 1 gn (f= 57.6150 Hz) conforming to IEC 60255-21-1
Shock Resistance	5 gn conforming to IEC 60068-2-27
Standards	IEC 60255-6
Product Certifications	GL UL GOST CSA C-Tick
Ambient Air Temperature For Storage	-4070 °C
Relative Humidity	95 % at 55 °C conforming to IEC 60068-2-30

Ip Degree Of Protection	IP20 (terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529	
Pollution Degree	3 conforming to IEC 60664-1	
Directives	89/336/EEC - electromagnetic compatibility 73/23/EEC - low voltage directive	
Dielectric Test Voltage	2 kV, 1 min AC 50 Hz conforming to IEC 60255-5 2 kV, 1 min AC 50 Hz conforming to IEC 60664-1	
Non-Dissipating Shock Wave	4 kV conforming to IEC 60255-5 4 kV conforming to IEC 60664-1 4 kV conforming to IEC 61000-4-5	

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.6 cm
Package 1 Width	8.0 cm
Package 1 Length	9.4 cm
Package 1 Weight	90.0 g
Unit Type Of Package 2	S02
Number Of Units In Package 2	48
Package 2 Height	15.0 cm
Package 2 Width	30.0 cm
Package 2 Length	40.0 cm
Package 2 Weight	4.809 kg

Contractual warranty

Warranty 18 months

Sustainability Green Premium

Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins
Circularity Profile	End of Life Information

RM17UAS15

Dimensions Drawings

Single-Phase and DC Voltage Control Relays

Dimensions and Mounting



Product datasheet

RM17UAS15


Connections and Schema

Single-Phase and DC Voltage Control Relays

Wiring Diagram



Application Scheme

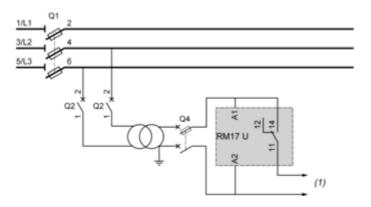

(1) To sensitive loads


RM17UAS15

Technical Description


Function Diagrams

Undervoltage Control

Without memory ("No Memory" mode)




With memory ("Memory" mode)




Overvoltage Control

Without memory ("No Memory" mode)



With memory ("Memory" mode)



Legend

Tt Time delay after crossing of threshold

Un Nominal supply voltage

U Monitored supply voltage

H Hysteresis

U> Overvoltage threshold

U< Undervoltage threshold

11-12, 11-14 Output relay connections (refer to Connections and Schema)

Relay status: black color = energized.

NOTE: In "Memory" mode, the relay opens when crossing of the threshold is detected and then stays in that position. The power supply voltage must be switched off to reset the product.