

# Product data sheet

Specifications



## interface plug in relay, Harmony Electromechanical Relays, 16A, 1CO, 110V DC

RSB1A160FD

**Discontinued on:** Aug 15, 2024

**Discontinued**

**Product availability:** Non-Stock - Not normally stocked in distribution facility

**Price\*: 7.68 USD**

### Main

Range of Product	Harmony Electromechanical Relays
Series name	Interface relay
Product or Component Type	Plug-in relay
Device short name	RSB
Contacts type and composition	1 C/O
Contact operation	Standard
[Uc] control circuit voltage	110 V DC
[Ithe] conventional enclosed thermal current	16 A -40.0000000000...104.0000000000 °F (-40...40 °C)
Status LED	Without
Control Type	Without push-button

### Complementary

Shape of pin	Flat (PCB type)
average coil resistance	30250 Ohm AC 20 °C +/- 10 %
[Ue] rated operational voltage	77...165 V DC
[Ui] rated insulation voltage	400 V IEC 60947
[Uimp] rated impulse withstand voltage	3.6 kV IEC 61000-4-5
Contacts material	Silver alloy (AgNi)
[Ie] rated operational current	16 A AC-1/DC-1) NO IEC 8 A AC-1/DC-1) NC IEC
Minimum switching current	10 mA
Maximum switching voltage	300 V DC IEC
minimum switching voltage	12 V
Maximum switching capacity	4000 VA/448 W
resistive rated load	16 A 250 V AC 16 A 28 V DC
Minimum switching capacity	120 mW 10 mA, 12 V
Operating rate	<= 600 cycles/hour under load <= 18000 cycles/hour no-load

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Mechanical durability	30000000 cycles
Electrical durability	100000 cycles, 16 A at 250 V, AC-1 NO 100000 cycles, 8 A at 250 V, AC-1 NC
Operating time	20 ms operating 20 ms reset
average coil consumption	0.45 W DC
Drop-out voltage threshold	>= 0.1 U <sub>c</sub> DC
Safety reliability data	B10d = 100000
Protection category	RT I
Test levels	Level A group mounting
Operating position	Any position
Net Weight	0.031 lb(US) (0.014 kg)
Sale per indivisible quantity	10
Device presentation	Complete product

## Environment

Dielectric strength	1000 V AC between contacts 2500 V AC between poles 5000 V AC between coil and contact
Standards	UL 508 IEC 61810-1 CSA C22.2 No 14
Product Certifications	CSA EAC UL
Ambient Air Temperature for Storage	-40...185 °F (-40...85 °C)
Vibration resistance	+/- 1 mm 10...55 Hz)IEC 60068-2-6
IP degree of protection	IP40 conforming to IEC 60529
Shock resistance	10 gn 11 ms) not operating IEC 60068-2-27 5 gn 11 ms) in operation IEC 60068-2-27
Ambient air temperature for operation	-40.0000000000...185.0000000000 °F (-40...85 °C) DC)

## Ordering and shipping details

Category	US10CP221127
Discount Schedule	0CP2
GTIN	3389110254884
Returnability	No
Country of origin	AT

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	0.5 in (1.2 cm)
Package 1 Width	0.8 in (2.0 cm)
Package 1 Length	1.2 in (3.0 cm)
Package 1 Weight	0.5 oz (13.0 g)

Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	0.7 in (1.8 cm)
Package 2 Width	1.0 in (2.5 cm)
Package 2 Length	12.3 in (31.2 cm)
Package 2 Weight	5.7 oz (162.0 g)
Unit Type of Package 3	S01
Number of Units in Package 3	350
Package 3 Height	5.9 in (15.0 cm)
Package 3 Width	5.9 in (15.0 cm)
Package 3 Length	15.7 in (40.0 cm)
Package 3 Weight	11.762 lb(US) (5.335 kg)

## Contractual warranty

Warranty	18 months
----------	-----------

Sustainability



**Green Premium™** label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)



Transparency   RoHS/REACH

Well-being performance


✓ Toxic Heavy Metal Free	
✓ Mercury Free	
✓ Rohs Exemption Information	Yes

Certifications & Standards

Reach Regulation	<a href="#">REACH Declaration</a>
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
China Rohs Regulation	<a href="#">China RoHS declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Circularity Profile	No need of specific recycling operations
California Proposition 65	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>


Dimensions Drawings

Dimensions

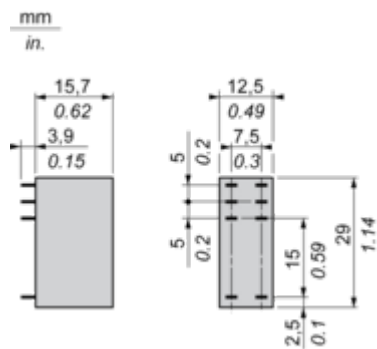

Connections and Schema

Wiring Diagram

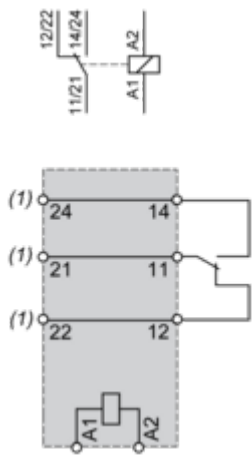


(1) Terminals 11 and 21,14 and 24,12 and 22 must be linked for this references

**NOTE:** For DC input, A1 have to be +, otherwise it would short circuit from protection module


Performance Curves

Electrical Durability of Contacts


Durability (inductive load) = durability (resistive load) x reduction coefficient.  
Resistive AC load

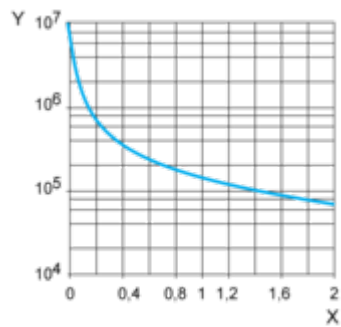

X Switching capacity (kVA)  
Y Durability (Number of operating cycles)  
Reduction coefficient for inductive AC load (depending on power factor cos φ)

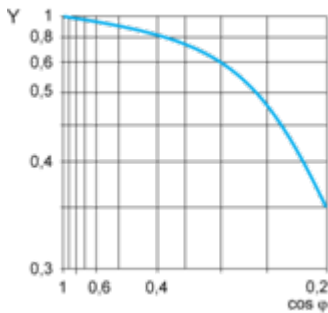

Y Reduction coefficient (A)  
Maximum switching capacity on resistive DC load

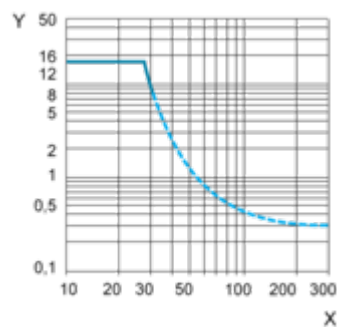

X Voltage DC  
Y Current DC  
**Note :** These are typical curves, actual durability depends on load, environment, duty cycle, etc.