Specifications





(!) Discontinued

Harmony, Interface plug-in relay, 5 A, 2 CO, clear cover, 48 V AC

RXG25E7

() Discontinued on: 10 June 2015

(!) End-of-service on: 21 Oct 2020

Main

in and	
Range Of Product	Harmony Relay
Series Name	Interface relay
Product Or Component Type	Plug-in relay
Device Short Name	RXG
Contacts Type And Composition	2 C/O
[Ithe] Conventional Enclosed Thermal Current	5 A at -4055 °C

Complementary

complementary	
[Ie] Rated Operational Current	5 A at 30 V (DC) conforming to UL 5 A at 30 V (DC) conforming to IEC 5 A at 250 V (AC) conforming to IEC 5 A at 250 V (AC) conforming to UL
Electrical Durability	100000 cycles for NO resistive load at 55 °C 100000 cycles for NC resistive load at 55 °C
Coil Resistance	1100 Ohm +/- 10 %
Shock Resistance	20 gn in operation 100 gn not in operation
Mounting Position	Any position
Average Consumption In Va	0.82 VA 60 Hz
Control Circuit Voltage Limits	0.81.1 Uc AC
[Uc] Control Circuit Voltage	48 V AC 50/60 Hz
Colour Of Cover	Transparent
Drop-Out Voltage Threshold	>= 0.3 Uc AC
Load Current	5 A at 250 V AC
Minimum Switching Capacity	50 mW at 10 mA, 5 V DC
Maximum Switching Capacity	1250 VA
Torque Value	0.8 N.m
Contact Resistance	100 mOhm
Insulation Resistance	1000 MOhm at 500 V DC
Electrical Insulation Class	Class F
Mechanical Durability	1000000 cycles
Safety Reliability Data	B10d = 100000

Operating Time	20 ms
Reset Time	20 ms
Overvoltage Category	III
Maximum Switching Voltage	250 V AC 30 V DC
Protection Category	RT I
Operating Rate	<= 1800 cycles/hour under load <= 18000 cycles/hour no-load
Pollution Degree	2
Utilisation Coefficient	20 %
[Ui] Rated Insulation Voltage	250 V conforming to IEC 300 V conforming to CSA 300 V conforming to UL
Dielectric Strength	1000 V AC between contacts with micro disconnection 5000 V AC between coil and contact with reinforced insulation 3000 V AC between poles with basic insulation
Test Levels	Level A group mounting
Device Presentation	Complete product
Contacts Material	Silver alloy (AgSnO2In2O3)
Net Weight	0.019 kg

Environment

Standards	UL 508 IEC 61810-1 CSA C22.2 No 14
Product Certifications	CE UL CSA EAC DNV-GL
Ambient Air Temperature For Storage	-4085 °C
Ambient Air Temperature For Operation	-4070 °C
Ip Degree Of Protection	IP40
Relative Humidity	1085 %
Vibration Resistance	3 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)in operation 5 gn, amplitude = +/- 0.75 mm (f = 10150 Hz)not in operation

Packing Units

Unit Type Of Package 1	PCE
------------------------	-----

1

Number Of Units In Package 1

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance


Reach Free Of Svhc
Toxic Heavy Metal Free
Mercury Free
Rohs Exemption Information Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Dimensions Drawings


Dimensions

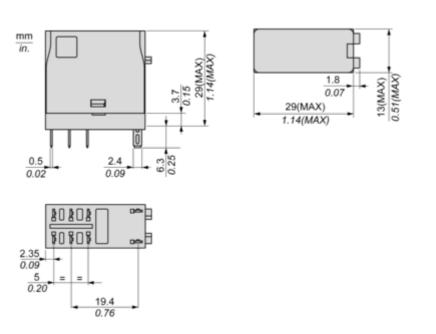

4

Connections and Schema


Wiring Diagram



Performance Curves

Performance Curves

Maximum Switching Capacity




X : Switching voltage (V)

- Y: Switching current (A)
- (1) AC Resistive Load
- (2) AC Inductive Load cos(Ø)=0.4
- (3) DC Resistive Load
- (4) DC Inductive Load (L/R=7ms)

Life Expectancy

Resistive Load




X : Contact Current (A)

Y : Operating Cycle Number

Life Expectancy

Inductive Load




X : Contact Current (A)

Y: Operating Cycle Number

NOTE: These are typical curves, actual durability depends on load, environment, duty cycle, etc.

Coil Operating Range

AC Coil Operating Range VS Ambient Temperature

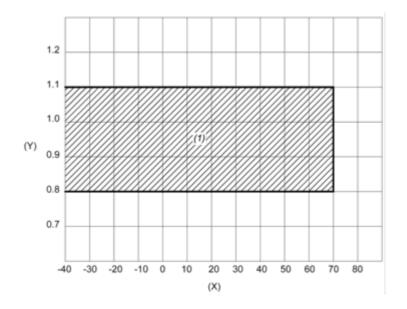

X : Ambient temperature (°C)

Y: Coil voltage (U/Uc)

(1) Permitted operating range area