

XCKMR44D2H29

limit switch XCKMR - reverse head stay put
crossed rods - 2x(NC+NO) - slow - M20

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Range of product	OsiSense XC
Series name	Special format
Product or component type	Limit switch
Product specific application	For hoisting and mechanical handling applications
Device short name	XCKMR
Body type	Fixed
Head type	Reversed rotary head
Material	Metal
Body material	Zamak
Head material	Zamak
Fixing mode	By the body
Movement of operating head	Rotary
Type of operator	Stay put crossed rods lever metal square rod 6 mm, L = 200 mm
Type of approach	Lateral approach, 2 directions
Cable entry	3 entries tapped for M20 x 1.5 cable gland 0.28... 0.51 in (7...13 mm)
Number of poles	4
Contacts type and composition	2 x (1 NC + 1 NO)
Contact operation	Slow-break, break before make

Complementary

Switch actuation	By any moving part
Electrical connection	Screw-clamp terminals 1 x 0.5...2 x 2.5 mm ²
Contacts insulation form	Zb
Number of steps	4 electrical positions
Contact block per direction [control circuit]	2 per direction
Positive opening	Without
Minimum torque for tripping	4.43 lbf.in (0.5 N.m)
Minimum actuation speed	6 m/min
Maximum actuation speed	4.92 ft/s (1.5 m/s) actuation point on the rod between 65 and 95 mm
Maximum displacement angle	-180 ° 180 °
Contact code designation	A300, AC-15 (Ue = 240 V), Ie = 3 A 10 A EN/IEC 60947-5-1 appendix A Q150, DC-13 (Ue = 125 V), Ie = 0.55 A EN/IEC 60947-5-1 appendix A
[Ui] rated insulation voltage	300 VUL 508 300 VCSA C22.2 No 14 500 V 3)EN/IEC 60947-1
Maximum resistance across terminals	25 MOhm IEC 60255-7 category 3
[Uimp] rated impulse withstand voltage	6 kV IEC 60664 6 kV EN/IEC 60947-1
Short-circuit protection	10 A cartridge fuse gG
Mechanical durability	2000000 cycles
Width	7.87 in (200 mm)
Height	4.65 in (118 mm)
Depth	2.32 in (59 mm)

Product weight	1.21 lb(US) (0.55 kg)
Terminals description ISO n°1	(21-22)NC (13-14)NO

Environment

Shock resistance	50 gn EN/IEC 60068-2-27
Vibration resistance	25 gn 10...500 Hz)EN/IEC 60068-2-6
IP degree of protection	IP66 EN/IEC 60529
IK degree of protection	IK07 EN 50102
Electrical shock protection class	Class I IEC 60536
Ambient air temperature for operation	-13...158 °F (-25...70 °C)
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Protective treatment	TC
Product certifications	CCC CSA CE UL
Standards	UL 508 CSA C22.2 No 14 EN/IEC 60947-5-1

Ordering and shipping details

Category	22449 - LIMIT SWITCHES,ACCESSORIES
Discount Schedule	T
GTIN	03389119077415
Package weight(Lbs)	0.73 kg (1.62 lb(US))
Returnability	No
Country of origin	ID

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Not applicable, out of EU RoHS legal scope

Contractual warranty

Warranty	18 months
----------	-----------

Technical drawing of the 1000 Series Ball Bearing Mounting Bracket, showing front and side views with dimensions in mm and inches.

Front View Dimensions:

- Overall width: 55 mm (2.17 in.)
- Distance from mounting hole to centerline: 59 mm (2.32 in.)
- Distance from mounting hole to centerline (alternative): 2.17 in.


Side View Dimensions:

- Overall height: 81 mm (3.19 in.)
- Distance from mounting hole to centerline: 61.5 mm (2.42 in.)
- Distance from mounting hole to centerline (alternative): 77 mm (3.03 in.)
- Distance from mounting hole to centerline (alternative): 200 mm (7.87 in.)
- Distance from mounting hole to centerline (alternative): 31.5 mm (1.24 in.)
- Distance from mounting hole to centerline (alternative): 11.5 mm (0.45 in.)
- Distance from mounting hole to centerline (alternative): 6.2 mm (0.24 in.)
- Distance from mounting hole to centerline (alternative): 6.5 mm (0.26 in.)
- Distance from mounting hole to centerline (alternative): 26°30'
- Distance from mounting hole to centerline (alternative): Ø6.2x6.5
- Distance from mounting hole to centerline (alternative): Ø0.24x0.26
- Distance from mounting hole to centerline (alternative): (1)


- (1) 3 tapped entries ISO M20x1.5
Ø: 2 elongated holes 6.2 x 6.5, inclined at 26°30' to the vertical axis, for M5 screws.

Wiring Diagram

2 x 2-pole NC+NO Break Before Make, Slow Break

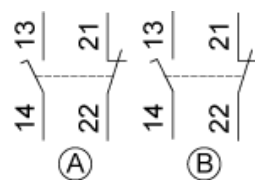

Functionnal Diagram

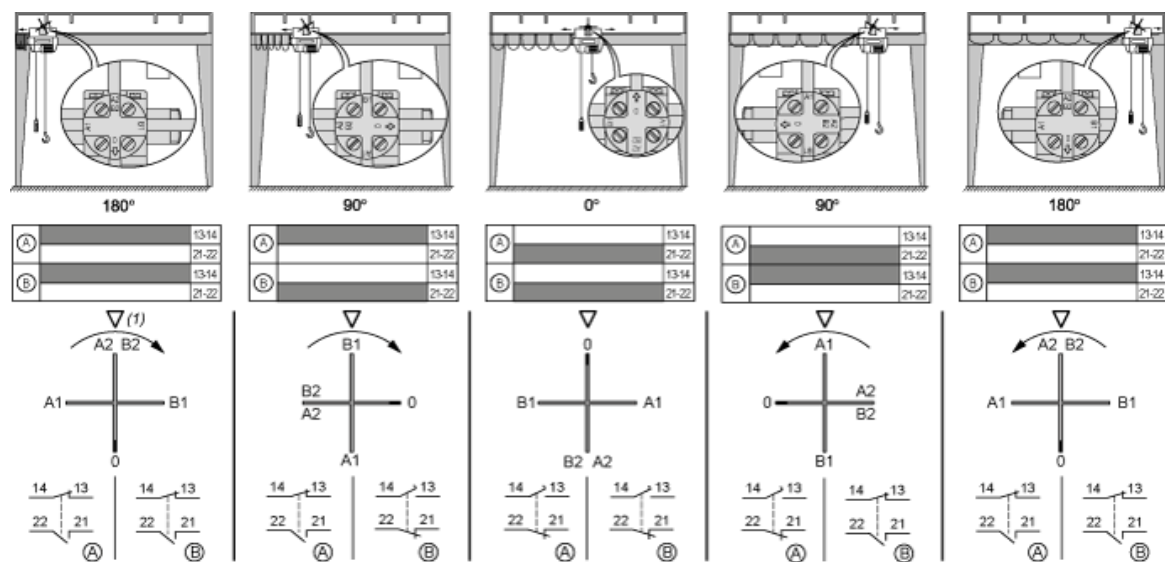

(1) Triangle symbol marked on top of head.