

Product datasheet

Specifications



ORANGE STEADY LENS INTEGRAL LED 24VAC/DC

XVEC2B5

⚠ Discontinued on: 01-Nov-2020

⚠ End-of-service on: 11-Jul-2022

⚠ Discontinued

Main

Range Of Product	Harmony XVE Optimum
Product Or Component Type	Indicator bank
Beacon Or Indicator Bank Unit Type	Illuminated unit
Signalling Type	Steady
Component Name	XVE
Light Source	Integral LED, orange
Bulb Type	LED
[Us] Rated Supply Voltage	24 V AC/DC

Complementary

Mounting Diamete	70 mm
Assembly Style	Customer assembly
Connections - Terminals	Screw clamp terminals, <= 1 x 1.5 mm ² with cable end
Marking	CE
Short-Circuit Protection	0.63 A
[Ui] Rated Insulation Voltage	250 V conforming to IEC 60947-1
Nominal Voltage Limit	0.85...1.1 Un conforming to IEC 60947-5-1
Current Consumption	< 25 mA
[Uimp] Rated Impulse Withstand Voltage	4 kV conforming to IEC 60947-1
Luminance	800 cd/m ²
Cad Overall Width	70 mm
Cad Overall Height	52 mm
Cad Overall Depth	70 mm
Net Weight	0.077 kg

Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-5-1
Product Certifications	CSA UL CCC
Ambient Air Temperature For Storage	-40...70 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Ambient Air Temperature For Operation	-25...55 °C
Electrical Shock Protection Class	Class I aluminium tube mounting conforming to IEC 61140 Class I plastic tube mounting conforming to IEC 61140
Protective Treatment	TC
Ip Degree Of Protection	IP40 any position except vertical position conforming to IEC 60529 IP42 vertical position conforming to IEC 60529

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	6 cm
Package 1 Width	7 cm
Package 1 Length	7 cm
Package 1 Weight	75 g

Contractual warranty

Warranty	18 months
----------	-----------

Sustainability

Green Premium™ label is Schneider Electric’s commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product’s sustainability >](#)

Well-being performance


 Mercury Free	
 Rohs Exemption Information	Yes
Reach Regulation	REACH Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)
China Rohs Regulation	China RoHS declaration
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Indicator Bank

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

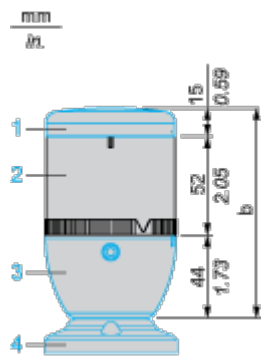

- (1) Cover (supplied with base unit XVEC21/C21P)
- (2) Illuminated or audible unit
- (3) Base unit XVEC21/C21P, to be ordered separately
- (4) Fixing base, to be ordered separately

Number of units (ref. 2)	b in mm	b in in.
1 unit	111	4.37
2 units	163	6.42
3 units	215	8.46
4 units	267	10.51
5 units	319	12.56