



black Ø30 mushroom pushbutton head Ø22 latching key release

Local distributor code: 23708868

3708868 ZB4BS72

EAN Code: 3389110888799

Main

Range of product	Harmony XB4
product or component type	Head for non-illuminated push-button
Device short name	ZB4
Bezel material	Chromium plated metal
Mounting diameter	22 mm
Sale per indivisible quantity	1
Head type	Standard
Shape of signaling unit head	Round
Type of operator	latching
Reset	Key release
Operator profile	Black mushroom Ø 30 mm, unmarked
type of keylock	Key 455
Key withdrawal position	Center

Complementary

device presentation	Basic element	
	C10 for <4 contacts using single and double blocks in front mounting	
	C8 for <4 contacts using single and double blocks in front mounting	
	C7 for <4 contacts using single blocks in front mounting	
	C15 for <1 contacts using single blocks in front mounting	
Electrical composition code	C11 for <3 contacts using single blocks in front mounting	
Mechanical durability	500000 cycles	
net weight	0.066 kg	
CAD overall depth	79 mm	
CAD overall height	30 mm	
CAD overall width	30 mm	

Environment

protective treatment	тн
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-4070 °C
Overvoltage category	Class I conforming to IEC 60536

IP degree of protection	IP66 conforming to IEC 60529
	IP67
	IP69
	IP69K
NEMA degree of protection	NEMA 13
	NEMA 4X
IK degree of protection	IK03 conforming to IEC 50102
Standards	EN/IEC 60947-5-1
	EN/IEC 60947-5-4
	EN/IEC 60947-1
	EN/IEC 60947-5-5
	CSA C22.2 No 14
	JIS C8201-5-1
	UL 508
	JIS C8201-1
Product certifications	GL
	UL listed
	DNV
	CSA
	BV
	LROS (Lloyds register of shipping)
Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27
	50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27

Packing Units

•	
Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	4.500 cm
Package 1 Width	5.000 cm
Package 1 Length	8.500 cm
Package 1 Weight	99.000 g
Unit Type of Package 2	S02
Number of Units in Package 2	42
Package 2 Height	15.000 cm
Package 2 Width	30.000 cm
Package 2 Length	40.000 cm
Package 2 Weight	4.424 kg
Unit Type of Package 3	P06
Number of Units in Package 3	672
Package 3 Height	75.000 cm
Package 3 Width	80.000 cm
Package 3 Length	60.000 cm
Package 3 Weight	78.784 kg

Contractual warranty

Warranty 18 months



Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO2 products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Rohs Exemption Information


Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

ZB4BS72

Dimensions Drawings

Dimensions




ZB4BS72


Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

Connection by Faston Connectors






- (1) Diameter on finished panel or support
- (2) 40 mm min. / 1.57 in. min.
- (3) 30 mm min. / 1.18 in. min.
- (4) Ø 22.5 mm / 0.89 in. recommended (Ø 22.3 mm $_0^{+0.4}$ / 0.88 in. $_0^{+0.016}$)
- (5) 45 mm min. / 1.78 in. min.
- (6) 32 mm min. / 1.26 in. min.

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

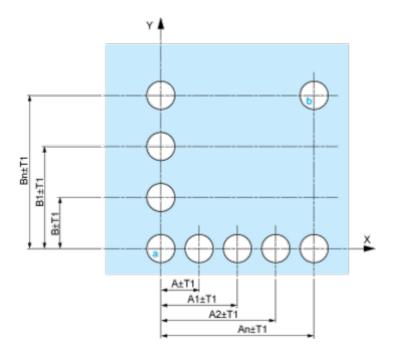


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

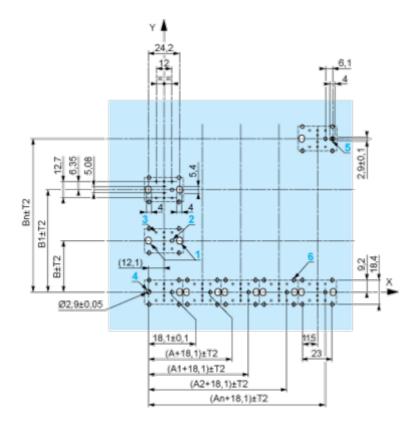

A: 30 mm min. B: 40 mm min. Dimensions in in.

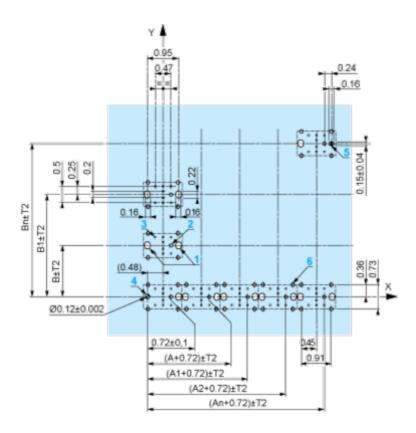

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in: T1 + T2 = 0.3 mm max.

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB4 BZ009: ± 2 30' (excluding cut-outs marked **a** and **b**).
- Tightening torque of screws ZBZ 006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB4 BZ079 fixing collar/pillar and its fixing screws:
 - $_{\circ}\;$ every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB4 BD•, ZB4 BJ•, ZB4 BG•).

The fixing centers marked **a** and **b** are diagonally opposed and must align with those marked **4** and **5**.

ZB4BS72

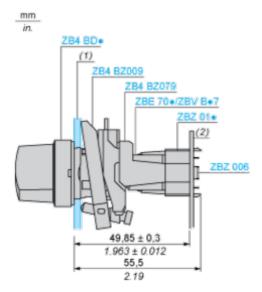

- (1) Panel
- (2) Printed circuit board

Mounting of Adapter (Socket) ZBZ 01•

- 1 2 elongated holes for ZBZ 006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ 01•
- 3 8 × Ø 1.2 mm / 0.05 in. holes
- $_{ullet}$ 4 1 hole Ø 2.9 mm \pm 0.05 / 0.11 in. \pm 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- . 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ 01∙


Dimensions An + 18.1 relate to the Ø 2.4 mm \pm 0.05 / 0.09 in. \pm 0.002 holes for centring adapter ZBZ 01•.

Product datasheet


ZB4BS72

Technical Description

Electrical Composition Corresponding to Code C7



Electrical Compositions Corresponding to Code C8



Product datasheet

ZB4BS72

Electrical Compositions Corresponding to Code C10



Product datasheet

ZB4BS72

Electrical Composition Corresponding to Codes C9, C11, SF1 and SR1



Electrical Composition Corresponding to Code C15

1 N/O



1 N/C



1 N/O + N/C or 1 N/O + N/O or 1 N/C + N/C



Legend

Single contact



Double contact



Light block



Possible location

