Product data sheet

Specification





Head for pilot light, Harmony XB5, orange, 22mm, with grooved lens, universal LED

ZB5AV053S

Product availability: Non-Stock - Not normally stocked in distribution facility

Important message: A change in appearance may be noted on the product but does not affect its use in terms of function and safety. This makes it compatible with our Universal LED blocks

Price*: 7.60 USD

Main

Range of Product	Harmony XB5	
Product or Component Type	Head for pilot light	
Product Compatibility	Universal LED	
Device short name	ZB5	
Bezel material	Dark grey plastic	
Mounting diameter	0.9 in (22 mm)	
Head type	Standard	
Sale per indivisible quantity	1	
Shape of signaling unit head	Round	
Cap/operator or lens colour	Yellow	
Operator additional information	With grooved lens	

Complementary

•	
CAD overall width	1.1 in (29 mm)
CAD overall height	1.1 in (29 mm)
CAD overall depth	1.2 in (31 mm)
Net Weight	0.037 lb(US) (0.017 kg)
Station name	XALD 15 cut-outs XALK 25 cut-outs
Electrical composition code	P1 front mounting integral LED P2 front mounting integral LED and transformer PF1 front mounting integral LED
device presentation	Basic element

Environment

protective treatment	тн
Ambient Air Temperature for Storage	-40158 °F (-4070 °C)
Ambient Air Temperature for Operation	-40158 °F (-4070 °C)
Overvoltage category	Class II IEC 60536

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

IP degree of protection	IP66 IEC 60529		
	IP67 IEC 60529		
	IP69 IEC 60529		
	IP69K ISO 20653		
NEMA degree of protection	NEMA 13		
	NEMA 4X		
Resistance to high pressure washer	1015.3 psi (7000000 Pa) 131 °F (55 °C) 0.1 m		
IK degree of protection	IK05 conforming to IEC 50102		
Standards	CSA C22.2 No 14		
	EN/IEC 60947-5-4		
	EN/IEC 60947-5-1		
	EN/IEC 60947-1		
	EN/IEC 60947-5-5		
	JIS C8201-5-1		
	UL 508		
	JIS C8201-1		
Environmental characteristic	High ambient lighting environment		
Vibration resistance	5 gn 2500 Hz)IEC 60068-2-6		
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27		
	50 gn 11 ms) half sine wave acceleration IEC 60068-2-27		

Ordering and shipping details

Category	US10CS222467
Discount Schedule	0CS2
GTIN	3389110291025
Returnability	No
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.3 in (3.2 cm)
Package 1 Width	1.6 in (4.0 cm)
Package 1 Length	2.0 in (5.0 cm)
Package 1 Weight	0.6 oz (16.0 g)
Unit Type of Package 2	S02
Number of Units in Package 2	100
Package 2 Height	5.9 in (15 cm)
Package 2 Width	11.8 in (30 cm)
Package 2 Length	15.7 in (40 cm)
Package 2 Weight	4.160 lb(US) (1.887 kg)

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance


⊘	Reach Free Of Svhc	
Ø	Toxic Heavy Metal Free	
⊘	Mercury Free	
⊘	Rohs Exemption Information	Yes

Certifications & Standards

Reach Regulation	REACh Declaration
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
China Rohs Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information

Dimensions Drawings


Dimensions



Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for


Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

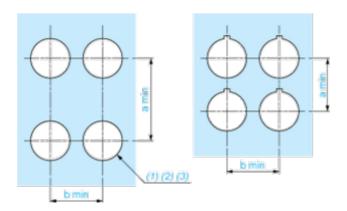

- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.
- (3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)

				•
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18


Detail of Lug Recess



- (1) Diameter on finished panel or support
- (2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3) \emptyset 22.5 mm recommended (\emptyset 22.3 $_0^{+0.4}$) / \emptyset 0.89 in. recommended (\emptyset 0.88 in. $_0^{+0.016}$)

Pushbuttons, Switches and Pilot Lights for Printed Circuit Board Connection


Panel Cut-outs (Viewed from Installer's Side)

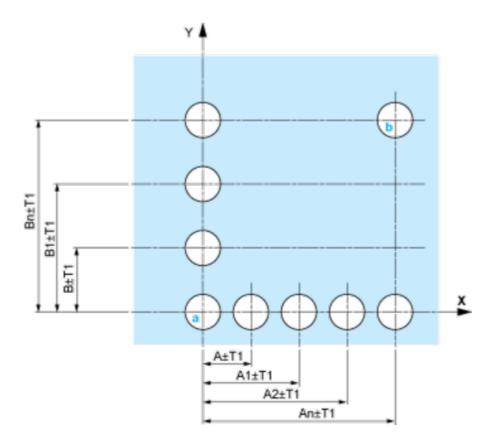


A: 30 mm min. / 1.18 in. min. **B:** 40 mm min. / 1.57 in. min.

Printed Circuit Board Cut-outs (Viewed from Electrical Block Side)

Dimensions in mm

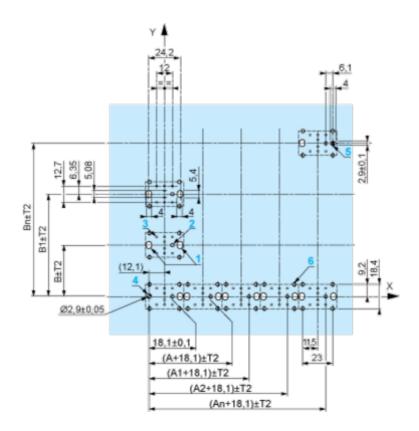

A: 30 mm min. B: 40 mm min. Dimensions in in.

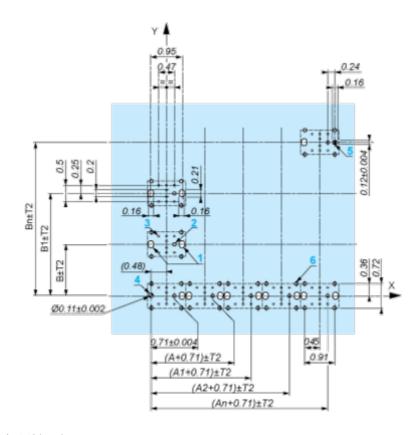

A: 1.18 in. min. **B:** 1.57 in. min.

General Tolerances of the Panel and Printed Circuit Board


The cumulative tolerance must not exceed 0.3 mm / 0.012 in.: T1 + T2 = 0.3 mm max.

ZB5AV053S

Installation Precautions

- Minimum thickness of circuit board: 1.6 mm / 0.06 in.
- Cut-out diameter: 22.4 mm ± 0.1 / 0.88 in. ± 0.004
- Orientation of body/fixing collar ZB5AZ009: ± 2 30' (excluding cut-outs marked a and b).
- Tightening torque of screws ZBZ006: 0.6 N.m (5.3 lbf.in) max.
- Allow for one ZB5AZ079 fixing collar/pillar and its fixing screws:
 - o every 90 mm / 3.54 in. horizontally (X), and 120 mm / 4.72 in. vertically (Y).
 - o with each selector switch head (ZB5AD•, ZB5AJ•, ZB5AG•).

The fixing centers marked a and b are diagonally opposed and must align with those marked 4 and 5.

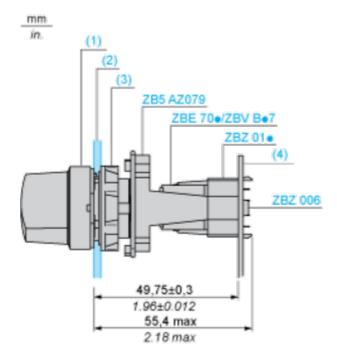

- (1) Head ZB5AD•
- (2) Panel
- (2) Nut
- (4) Printed circuit board

Mounting of Adapter (Socket) ZBZ01•

- 1 2 elongated holes for ZBZ006 screw access
- 2 1 hole Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 for centring adapter ZBZ01•
- $_{\bullet}$ 3 8 × Ø 1.2 mm / 0.05 in. holes
- 4 1 hole Ø 2.9 mm ± 0.05 / 0.11 in. ± 0.002, for aligning the printed circuit board (with cut-out marked a)
- 5 1 elongated hole for aligning the printed circuit board (with cut-out marked b)
- 6 4 holes Ø 2.4 mm / 0.09 in. for clipping in adapter ZBZ01•

Dimensions An + 18.1 relate to the Ø 2.4 mm ± 0.05 / 0.09 in. ± 0.002 holes for centring adapter ZBZ01•.

Product data sheet

ZB5AV053S

Technical Description

Electrical Composition Corresponding to Codes P1, P3, PF1, PR1 and PF2

Light block



Electrical Composition Corresponding to Codes M6 and P2



Legend

Single contact



Double contact



Light block



Possible location

