Product datasheet

Specifications





Light block with body fixing collar, Harmony XB5, plastic, orange, integral LED, 24V AC DC, 1NO

ZB5AW0B51

() Discontinued on: 14 Mar 2023

(!) Discontinued

Main

Harmony XB5				
Complete body/contact assembly and light block				
ZB5				
Plastic				
1				
Standard				
1 NO				
Slow-break				
Screw clamp terminals, <= 2 x 1.5 mm ² with cable end conforming to EN 60947-1 Screw clamp terminals, >= 1 x 0.22 mm ² without cable end conforming to EN 60947-1				
Protected LED				
Integral LED				
Direct				
Orange				

Complementary

CAD overall width	30 mm
CAD overall height	42 mm
CAD overall depth	32 mm
Terminals description ISO n°1	(13-14)NO
net weight	0.032 kg
Contacts usage	Standard
Positive opening	Without
Operating travel	2.6 mm (NO changing electrical state) 4.3 mm (total travel)
Operating force	2.3 N NO changing electrical state
Operating torque	0.05 N.m NO changing electrical state
Mechanical durability	5000000 cycles
Tightening torque	0.81.2 N.m conforming to EN 60947-1

Shape of screw head	Cross compatible with Philips no 1 screwdriver				
	Cross compatible with pozidriv No 1 screwdriver				
	Slotted compatible with flat Ø 4 mm screwdriver				
	Slotted compatible with flat Ø 5.5 mm screwdriver				
Contacts material	Silver alloy (Ag/Ni)				
Short-circuit protection	10 A cartridge fuse type gG conforming to EN/IEC 60947-5-1				
[Ith] conventional free air thermal current	10 A conforming to EN/IEC 60947-5-1				
[Ui] rated insulation voltage	600 V (pollution degree 3) conforming to EN 60947-1				
[Uimp] rated impulse withstand voltage	6 kV conforming to EN 60947-1				
[le] rated operational current	3 A at 240 V, AC-15, A600 conforming to EN/IEC 60947-5-1				
	6 A at 120 V, AC-15, A600 conforming to EN/IEC 60947-5-1				
	0.1 A at 600 V, DC-13, Q600 conforming to EN/IEC 60947-5-1				
	0.27 A at 250 V, DC-13, Q600 conforming to EN/IEC 60947-5-1				
	0.55 A at 125 V, DC-13, Q600 conforming to EN/IEC 60947-5-1				
	1.2 A at 600 V, AC-15, A600 conforming to EN/IEC 60947-5-1				
Electrical durability	1000000 cycles, AC-15, 2 A at 230 V, operating rate <3600 cyc/h, load factor: 0.5				
	conforming to EN/IEC 60947-5-1 appendix C				
	1000000 cycles, AC-15, 3 A at 120 V, operating rate <3600 cyc/h, load factor: 0.5				
	conforming to EN/IEC 60947-5-1 appendix C				
	1000000 cycles, AC-15, 4 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5				
	conforming to EN/IEC 60947-5-1 appendix C				
	1000000 cycles, DC-13, 0.2 A at 110 V, operating rate <3600 cyc/h, load factor: 0.5				
	conforming to EN/IEC 60947-5-1 appendix C				
	1000000 cycles, DC-13, 0.5 A at 24 V, operating rate <3600 cyc/h, load factor: 0.5				
	conforming to EN/IEC 60947-5-1 appendix C				
Electrical reliability	Λ < 10exp(-6) at 5 V and 1 mA in clean environment conforming to EN/IEC				
	60947-5-4				
	Λ < 10exp(-8) at 17 V and 5 mA in clean environment conforming to EN/IEC				
	60947-5-4				
Signalling type	Steady				
[Us] rated supply voltage	24 V AC/DC at 50/60 Hz				
Supply voltage limits	19.230 V DC				
	21.626.4 V AC				
Current consumption	18 mA				
Service life	100000 h at rated voltage and 25 °C				
Surge withstand	1 kV conforming to IEC 61000-4-5				
device presentation	Basic sub-assemblies				

Environment

protective treatment	тн
Ambient air temperature for storage	-4070 °C
Ambient air temperature for operation	-4070 °C
Electrical shock protection class	Class II conforming to IEC 60536
Standards	JIS C8201-5-1 EN/IEC 60947-5-1 EN/IEC 60947-1 EN/IEC 60947-5-4 UL 508 CSA C22.2 No 14 JIS C8201-1
Product certifications	GL UL listed LROS (Lloyds register of shipping) DNV CSA BV

Vibration resistance	5 gn (f= 2500 Hz) conforming to IEC 60068-2-6
Shock resistance	30 gn (duration = 18 ms) for half sine wave acceleration conforming to IEC 60068-2-27 50 gn (duration = 11 ms) for half sine wave acceleration conforming to IEC 60068-2-27
Resistance to fast transients	2 kV conforming to IEC 61000-4-4
Resistance to electromagnetic fields	10 V/m conforming to IEC 61000-4-3
Resistance to electrostatic discharge	6 kV on contact (on metal parts) conforming to IEC 61000-2-6 8 kV in free air (in insulating parts) conforming to IEC 61000-2-6
Electromagnetic emission	Class B conforming to IEC 55011

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.6 cm
Package 1 Width	5.3 cm
Package 1 Length	6 cm
Package 1 Weight	31 g
Unit Type of Package 2	BB1
Number of Units in Package 2	5
Package 2 Height	5.6 cm
Package 2 Width	3.4 cm
Package 2 Length	26.5 cm
Package 2 Weight	155 g
Unit Type of Package 3	S02
Number of Units in Package 3	100
Package 3 Height	15 cm
Package 3 Width	30 cm
Package 3 Length	40 cm
Package 3 Weight	3.23 kg

Contractual warranty

Warranty

18 months

Sustainability Screen Premium

Green PremiumTM label is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Yes

Learn more about Green Premium >

Guide to assess a product's sustainability >



Transparency RoHS/REACh

Well-being performance



Rohs Exemption Information


Certifications & Standards

Reach Regulation	REACh Declaration			
Eu Rohs Directive	Pro-active compliance (Product out of EU RoHS legal scope)			
China Rohs Regulation	China RoHS declaration			
Environmental Disclosure	Product Environmental Profile			
Weee	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins			
Circularity Profile	End of Life Information			

Product datasheet

Dimensions Drawings

Dimensions




Product datasheet ZB5AW0B51

Mounting and Clearance

Panel Cut-out for Pushbuttons, Switches and Pilot Lights (Finished Holes, Ready for Installation)

Connection by Screw Clamp Terminals or Plug-in Connectors or on Printed Circuit Board

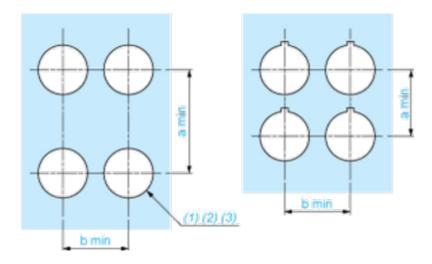


(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended. (3) \emptyset 22.5 mm recommended (\emptyset 22.3 $_0^{+0.4}$) / \emptyset 0.89 in. recommended (\emptyset 0.88 in. $_0^{+0.016}$)

5				•
Connections	a in mm	a in in.	b in mm	b in in.
By screw clamp terminals or plug-in connector	40	1.57	30	1.18
By Faston connectors	45	1.77	32	1.26
On printed circuit board	30	1.18	30	1.18

Detail of Lug Recess



(1) Diameter on finished panel or support

(2) For selector switches and Emergency stop buttons, use of an anti-rotation plate type ZB5AZ902 is recommended.

(3) Ø22.5 mm recommended (Ø22.3 $_0^{+0.4}$) / Ø0.89 in. recommended (Ø0.88 in. $_0^{+0.016}$)