


## General Purpose Alternate and Momentary Pushbutton Switches — Ac/Dc Rated

### MOMENTARY ACTION TYPES

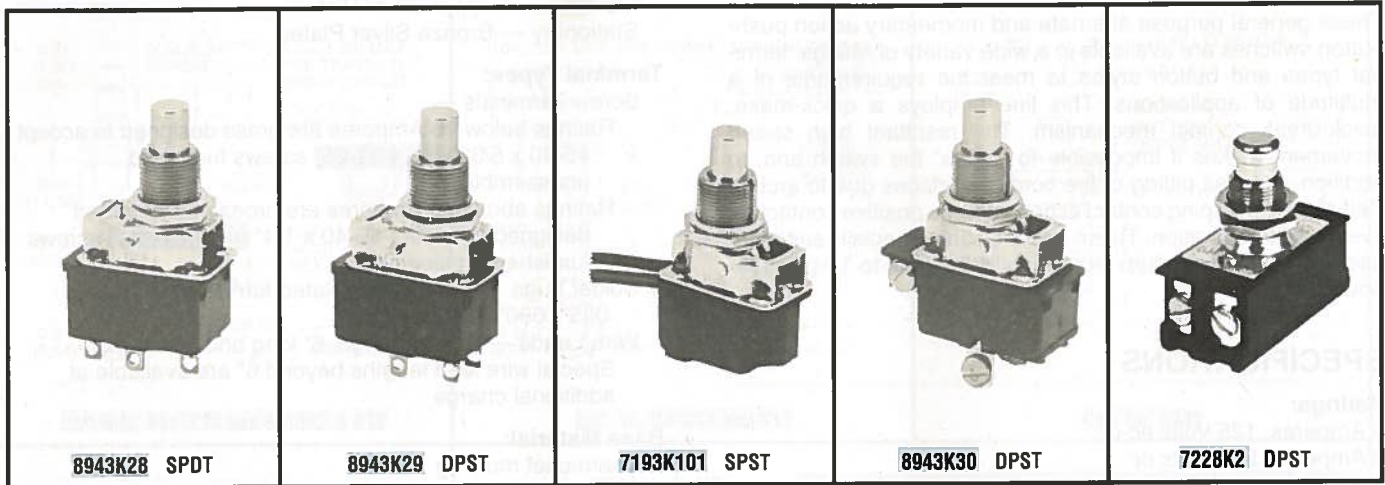

**SELECTION TABLE** — Alternate action ac/dc Pushbutton Switches  
(**Bold Face Type** indicates items normally in Distributor Stock)

Rating	Poles and Throw	Contact Action	Circuit # See page 158	Button Style	Bushing Length		Typical Maximum Operating Force	Catalog Numbers		
					Inches	Millimeters		Solder Lugs	Screw Terminals	Wire Leads
6A, 125V ac-dc ① 3A, 250V dc	1 P.S.T.	Push On/Push Off	A	Standard	0.687	17,45		<b>7206K104</b>	<b>7208K104</b>	<b>7207K104</b>
6A, 125V ac-dc 3A, 250V dc	2 P.D.T.	Push On/Push On	D	Standard	0.562	14,27		<b>8943K32</b>	---	---
16A, 125V ac-dc 8A, 250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.468	11,89	7.4 lbs.		7220K2	
16A, 125V ac-dc 8A, 250V ac-dc 1 Hp, 125-250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.562	14,27	17.52 lbs.	---	7227K2 ②	---
20A, 125V ac-dc 10A, 250V ac-dc 1-1/2 Hp, 125-250V ac-dc	2 P.S.T.	Push On/Push Off	C	Standard	0.562	14,27	16.0 lbs.	---	7229K2	---

① Available in ratings up to 8 amp, 125V ac or dc. Refer to the Customer Service Center listed on the back cover of this catalog.

② CSA Certified.

**SELECTION TABLE** — Momentary action ac/dc Pushbutton Switches  
(**Bold Face Type** indicates items normally in Distributor Stock)

Rating	Poles and Throw	Contact Action	Circuit # See page 158	Button Style	Bushing Length		Typical Maximum Operating Force	Catalog Numbers		
					Inches	Millimeters		Solder Lugs	Screw Terminals	Wire Leads
6A, 125V ac-dc 3A, 250V dc	1 P.S.T. 1 P.D.T.	Off — Mom. On On — Mom. On	A B	Standard Standard	0.500 0.500	12,70 12,70	9.0 lbs.	7190K101 <b>8943K28</b>	7196K101 ---	7193K101 ---
12A, 125V ac-dc 6A, 250V ac-dc	1 P.S.T. 1 P.D.T.	Off — Mom. On On — Mom. On	A B	Standard Standard	0.437 0.437	11,10 11,10		---	8980K201 8980K202	---
6A, 125V ac-dc 3A, 250V dc	2 P.S.T. 2 P.D.T.	Off — Mom. On On — Mom. On	C D	Standard Standard	0.500 0.500	12,70 12,70		<b>8943K29</b> 7199K102	8943K30 7199K101	---
16A, 125V ac-dc 8A, 250V ac-dc 3/4 Hp, 125-250V ac-dc	2 P.S.T. 2 P.S.T.	Off — Mom. On On — Mom. Off	C	Standard Standard	0.437 0.437	11,10 11,10	19.0 lbs. 19.0 lbs.	---	7226K2 ② 7226K3 ②	---
20A, 125V ac-dc 10A, 250V ac-dc 1-1/2 Hp, 125-250V ac-dc	2 P.S.T. 2 P.S.T.	Off — Mom. On On — Mom. Off	C	Standard Standard	0.437 0.437	11,10 11,10	20.0 lbs. 20.0 lbs.	---	7228K2 ② 7228K3 ②	---

② CSA Certified.